


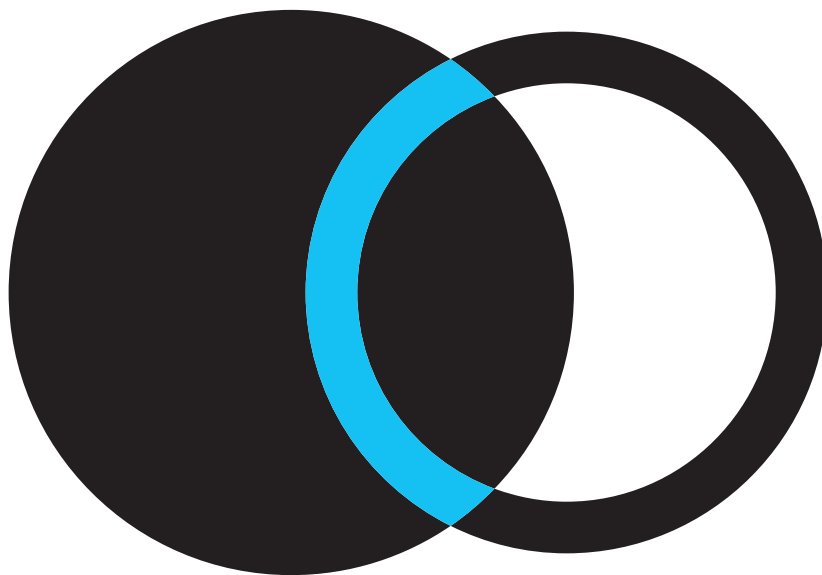

LED LINEAR LIGHTING SOLUTION PROVIDER

ABOUT COLORS

HUACAI OPTO CO., LTD. (COLORS), founded in 2008, is a national high-tech enterprise specializing in LED lighting. It has incubated a forefront-ranked brand-COLORS in the segmented domain, proficient in providing comprehensive lighting solutions for residential, office, commercial scenarios and the like, aspiring to become a worldly-influential innovative brand.

- 

Seventeen-year History

Becomes a leading enterprise enterprise in the segmented domain with 17-year accumulation.
- 

Group Company

Headquartered in Shenzhen, and more branches layout in the Yangzhou and Jiangmen.
- 

Production Base

2 self-established factories in Yangzhou and Jiangmen, covering an area of 45,000m². Featured in stable high-quality, strong production capacity and quick delivery.
- 

Product System

The full product system includes led strips, neon strips, linear lights, track lights and downlights. Proficient in providing comprehensive lighting solution for residential, office,commercial scenes etc.
- 

Certification System

Qualified for ISO9001 Quality System Certification, ISO14001 Environmental System Certification and product certifications inclusive of CE, UL and CCC etc.
- 

Independent R&D

Sticks to independent R&D and intellectual property management. Qualified for the title of National High-tech Enterprise, and repeatedly gained international design awards inclusive of IF, IDEA, RED DOT and GOLDEN PIN etc.
- 

International Brand

Registered trademarks in 30 countries and regions worldwide and carried out more than 20 promotional tours throughout the year. Brand partners are worldwide distributed.
- 

Global Market

Products are exported to over 100 countries and regions worldwide. Dominates the European market and cooperates with many major well-known brands.





CORPORATE CULTURE

MISSION


Integrates light with space perfectly through innovative technology and design.

VISION

Becomes a worldly-influential innovative lighting enterprise.

VALUES

- Customer foremost
- Striving-oriented
- Trust makes everything simple
- Change is the only constant

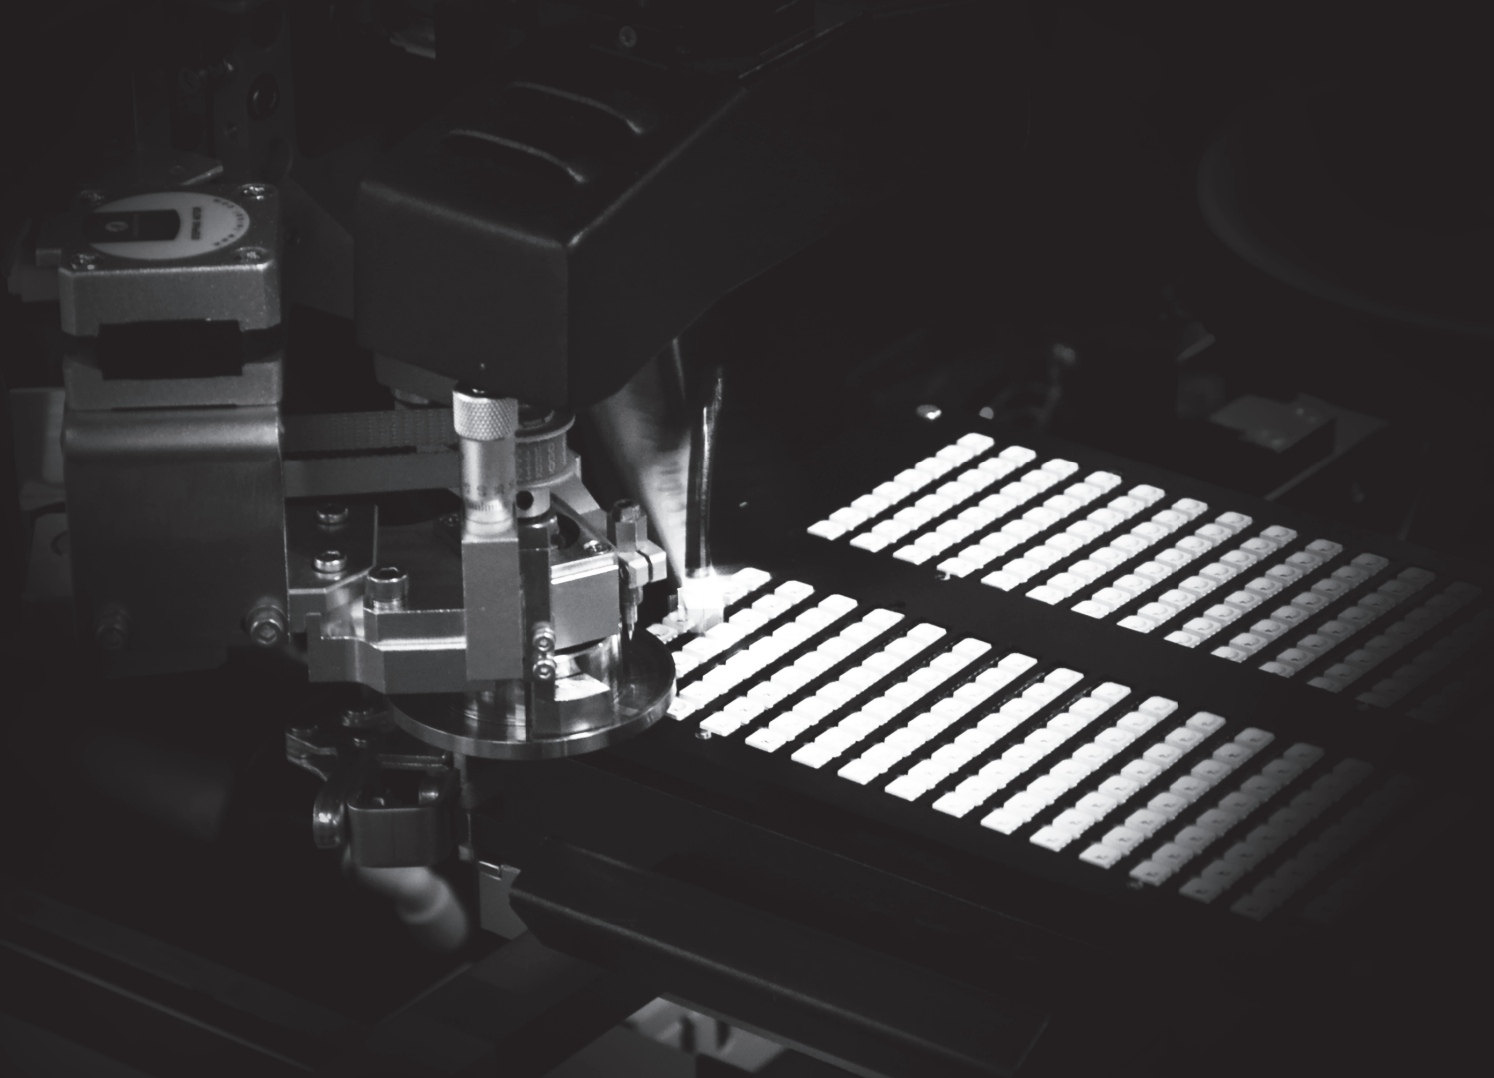

R&D AND MANUFACTURING


Manufacturing

COLORS has 2 directly-operated production bases in Yangzhou and Jiangmen covering an area of 45,000 square meters and 600+ staffs. The production bases contain over 30 hi-speed automatic encapsulation lines, 15 automatic SMD and applied welding lines, 5 automatic extrusion lines and 6 automatic luminaire production lines, characterizing a complete production process for LED strip inclusive of LED encapsulation, hi-speed SMT, automatic welding and full series of water resistance with average monthly production capacity of LED strips reaching up to 1.5 million meters. Besides, COLORS modernized manufacturing factory to achieve a complete production process for linear luminaire inclusive of precision machining, automatic assembly, color spraying and free customization with average monthly production capacity reaching up to 120, 000 strips in order to assure customers of high-quality, supe-cost-effective products and rapid delivery.



R&D

COLORS has established a R&D expert team composed of over 50 core technicians, a majority of which graduated from top-rated universities and are proficient in such fields as optics, technique, material science, electrics, thermal physics, intelligent control and industrial design with more than 10-year R&D experience and technical know-how in linear lighting.

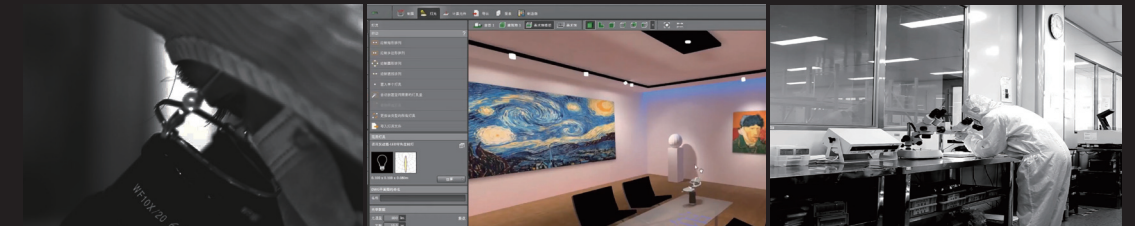

Laboratory & Inspection

Laboratory of COLORS, covering an area of 460 square meters, was outfitted with 48 sets of equipment which was distributed as per safety zone, EMC zone, photoelectric zone, IP water resistance zone, aging zone and product reliability zone. Inspection covers products inclusive of LED strip, neon strip, linear luminaire, power supply and related accessories, with inspection standard ranging from safety, EMC, performance to product reliability. Testing reports can be tracked all the way from product design evaluation period to type approval period to guarantee quality of products.



Patent

COLORS strives to R&D in product and technology. So far, it has gained 3 invention patents and nearly 100 utility model patents and appearance patents.





30+ brand distributors
Brand service in 100+ countries and regions

- HEADQUARTER & SUBSIDIARY
- COLORS SERVICE PROVIDER

GLOBAL LAYOUT

In 2015, COLORS began to establish cooperation mechanism for overseas channels. Headquartered in Shenzhen, built up a sound brand distributor system and established in Belarus apart from those in Yangzhou and Jiangmen. So far, it has registered trademarks in 30 countries and regions worldwide. It carried out over 20 global promotional tours throughout the year with brand partners distributed worldwide. Products are exported to over 100 countries and regions inclusive of Southeast Asia, North America, Latin America, Africa, Australia, Middle East, Europe, etc. Besides, it dominates the European market and cooperates with many major well-known brands.

CERTIFICATION SYSTEM

Certification

COLORS has won the title of National High-tech Enterprise in 2016, and was qualified for ISO9001 Quality System and ISO14001 Environmental System Certifications. All products have passed tests of third-party authoritative laboratory institutions and have obtained multiple quality certifications inclusive of CQC, CE, REACH, ROHS, UL, ETL, SAA, TUV, LM-80 etc. required by various countries and regions.



CQC Product Certification




ISO-9001& ISO-14001
Certifications



Award

COLORS strives to R&D in product and technology. So far, it has gained 3 invention patents and nearly 100 utility model patents and appearance patents.

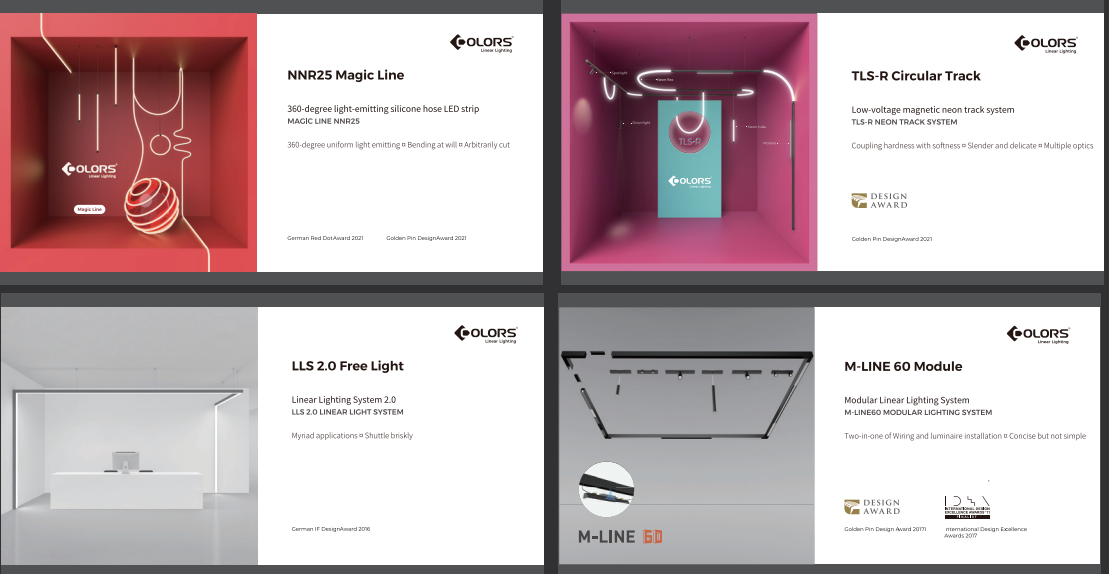

Design Awards



PRODUCT CONCEPTS

COLORS is always customer-oriented and sticks to its design concepts “Minimalist, Innovation, Experience First”. It brings “Modular, Professional, Smart” lighting products and “Innovative, Flexible to use, Easy to install” user experience to its customers, and besides offers “In-depth flexible customization” service and a “One-stop purchase” solution. Based on On-line Store, it further creates exclusive values like “effective dialogues, easy ordering, quick delivery and flexible stocking”.

Modular Design

Make full use of modular design theory
For products to be playable, innovative, easy to install and effective for stocking.

Free Application

Break space limitation to make real infinite creativity of designers
Let light and space integrate perfectly and accomplish mutually

Professional Optics

Ultimate light color, deep anti-glare, precise light control
For lighting experience to be healthy, comfortable and human-centered


Smart Connectivity

Combine wire, wireless, sensor and AI etc.
smart lighting technology
Deeply match with mainstream dimming & smart control to create smarter light.


One-stop Matching

Rich in product categories for diversified demands
Offer complete drive control & matching solution for one-stop purchase


COLORS ONLINE STORE

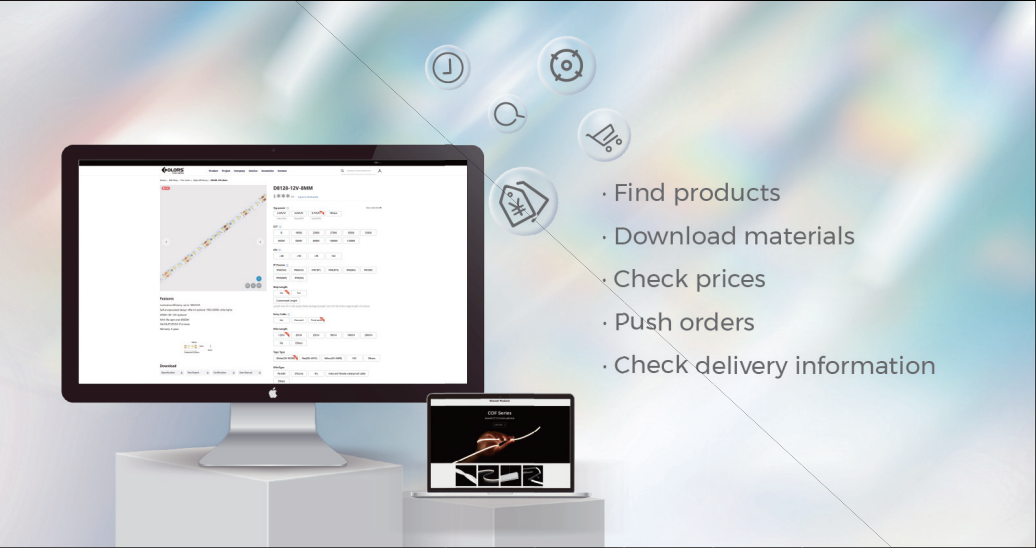


Flexible customization

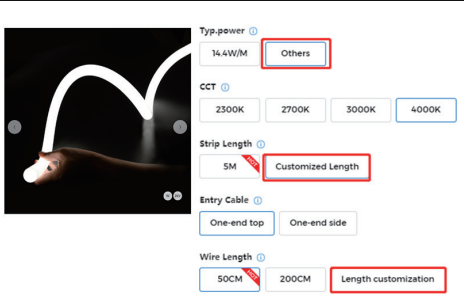


No MOQ

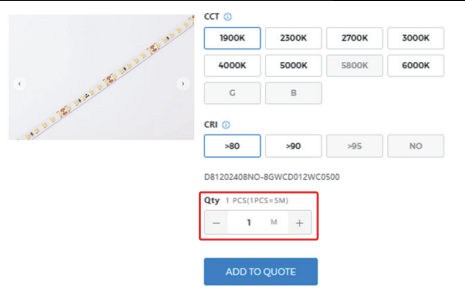

Instant Quote

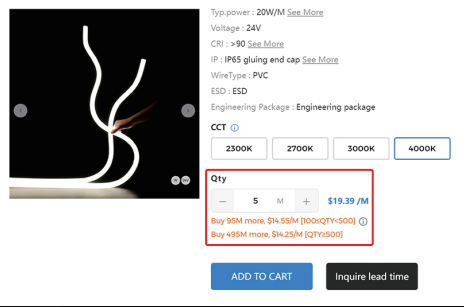


Automated delivery time notification

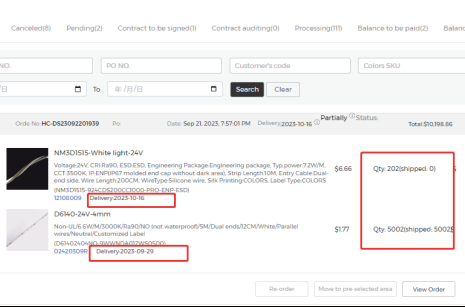

Contents


Linear lights



Profile

LLS-C	19
ALS	45
ALS ECO	91


Track lights NEW



48V Magnetic track

TLSE-M20 & TLS-R	109
------------------	-----

Downlights NEW



Free-dot

HOLA	139
------	-----



HOLA
Free-Dot System

- Recessed on ceiling, delicate in look
- Easy to install and replace
- 23 optics, flexible application

Product Series

Profile


LLS-C

LLS-C, of 35/ 55mm luminous surface, is available in any diameters and any radians. It can be spliced with 20m/ roll flexible diffuser and twisted 90°/ 180° to form creative 3D styling.




ALS ECO

ALS ECO, is based on ALS Series to get upgrade on process to be more cost-effective. It can be recessed in micro scenes and corners to be profile-less full light look.

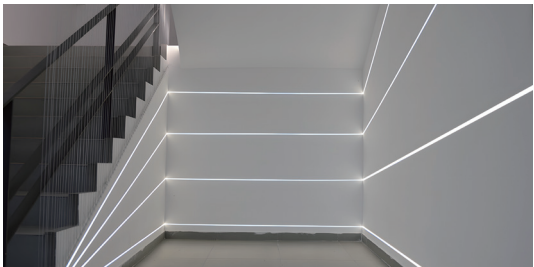

ALS

ALS Series, min. to 5mm in width, is designed for linear lights to perfectly fit into architectural settings such as plastered line, skirting board, corner, wall edge and floor etc. to achieve integrated lighting, full light look but in small profile.

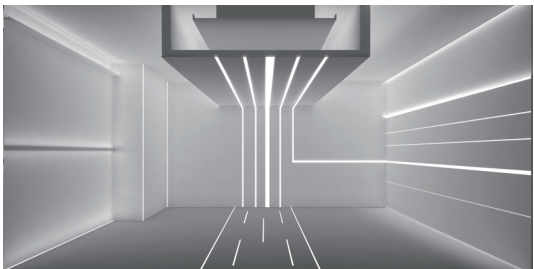





LLS-C

LLS-C, of 35/55mm(1.38"/2.17") luminous surface, is available in any diameters and any radians. It can be spliced with 20m(65.6ft)/roll flexible diffuser and twisted 90°/180° to form creative 3D styling.


Product Overview

AS3535 Series

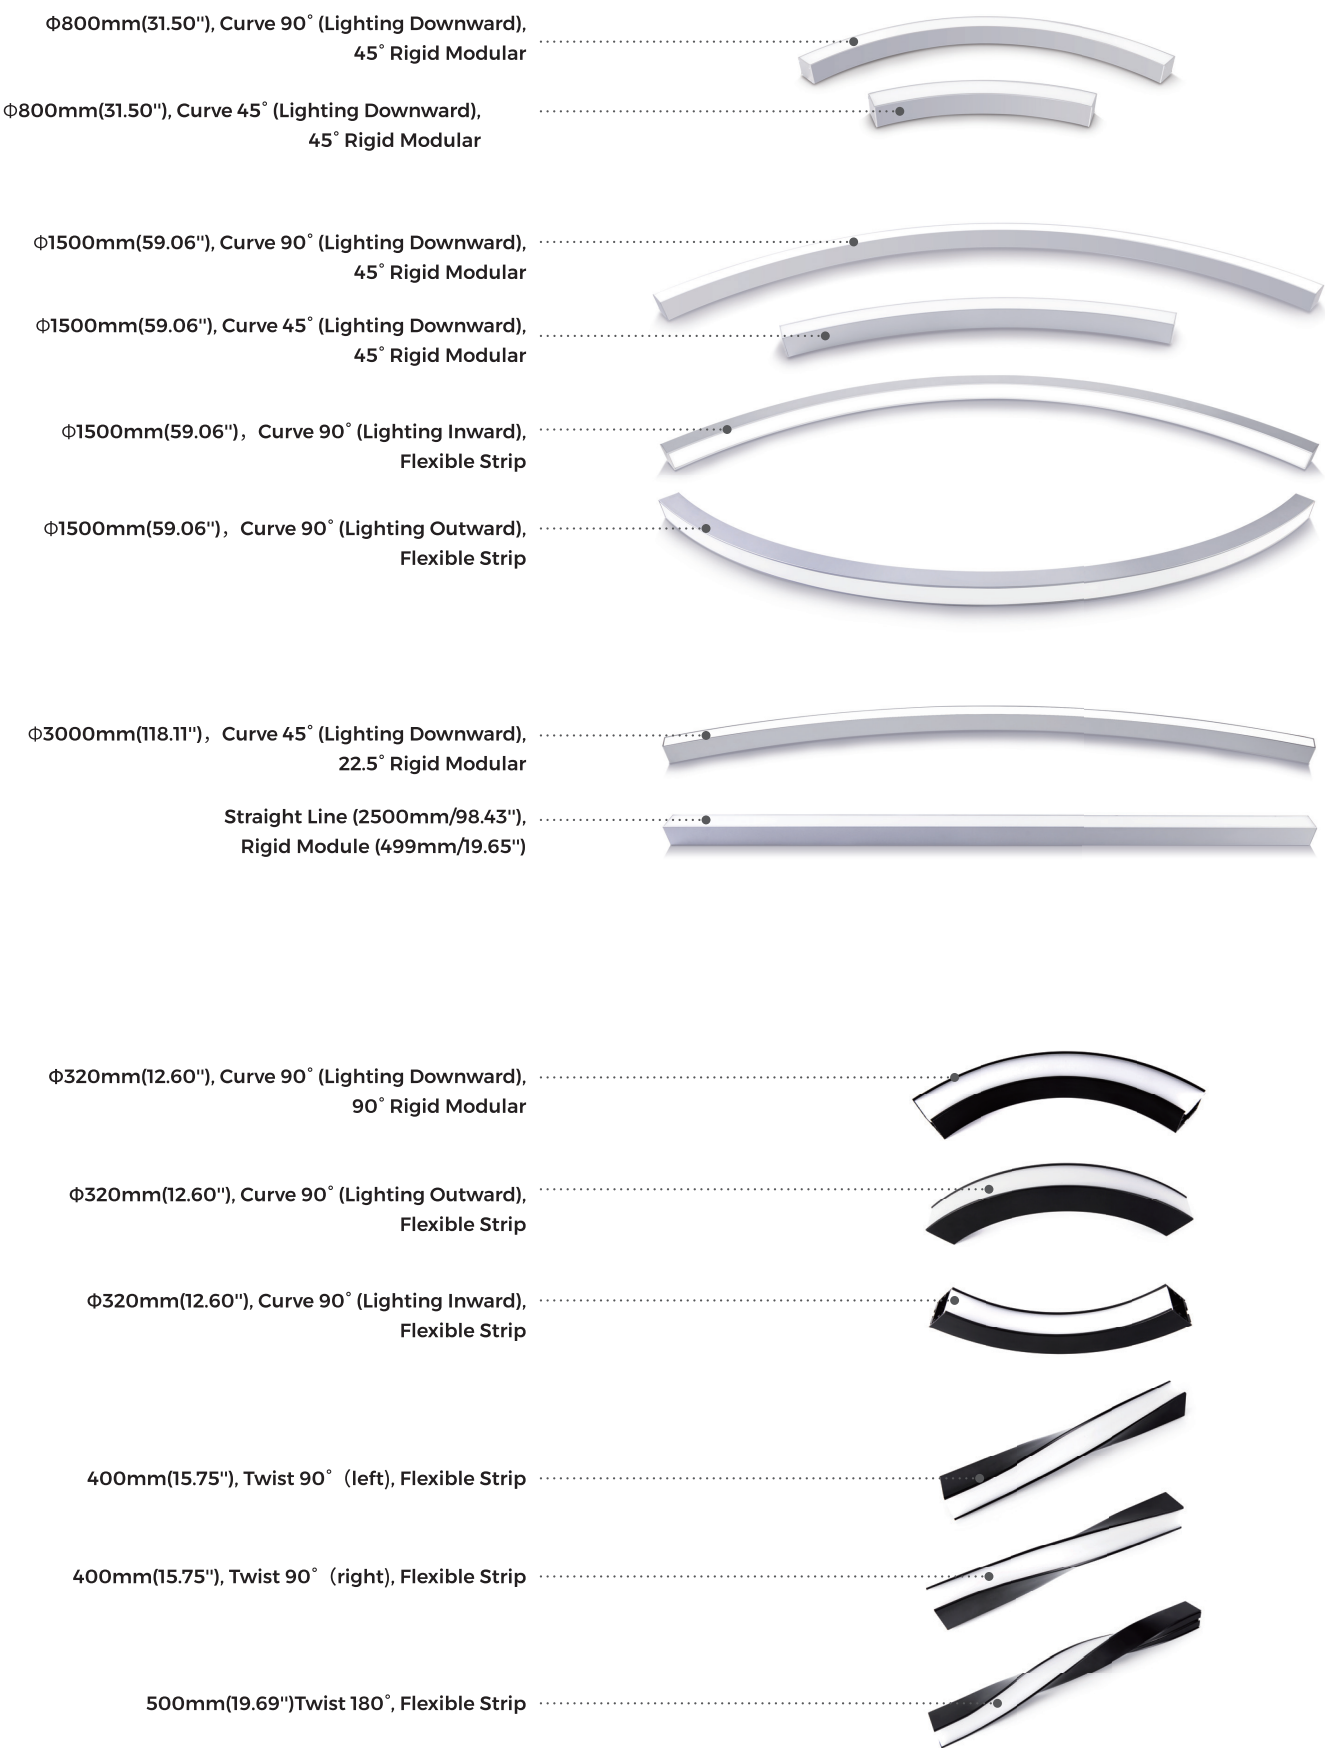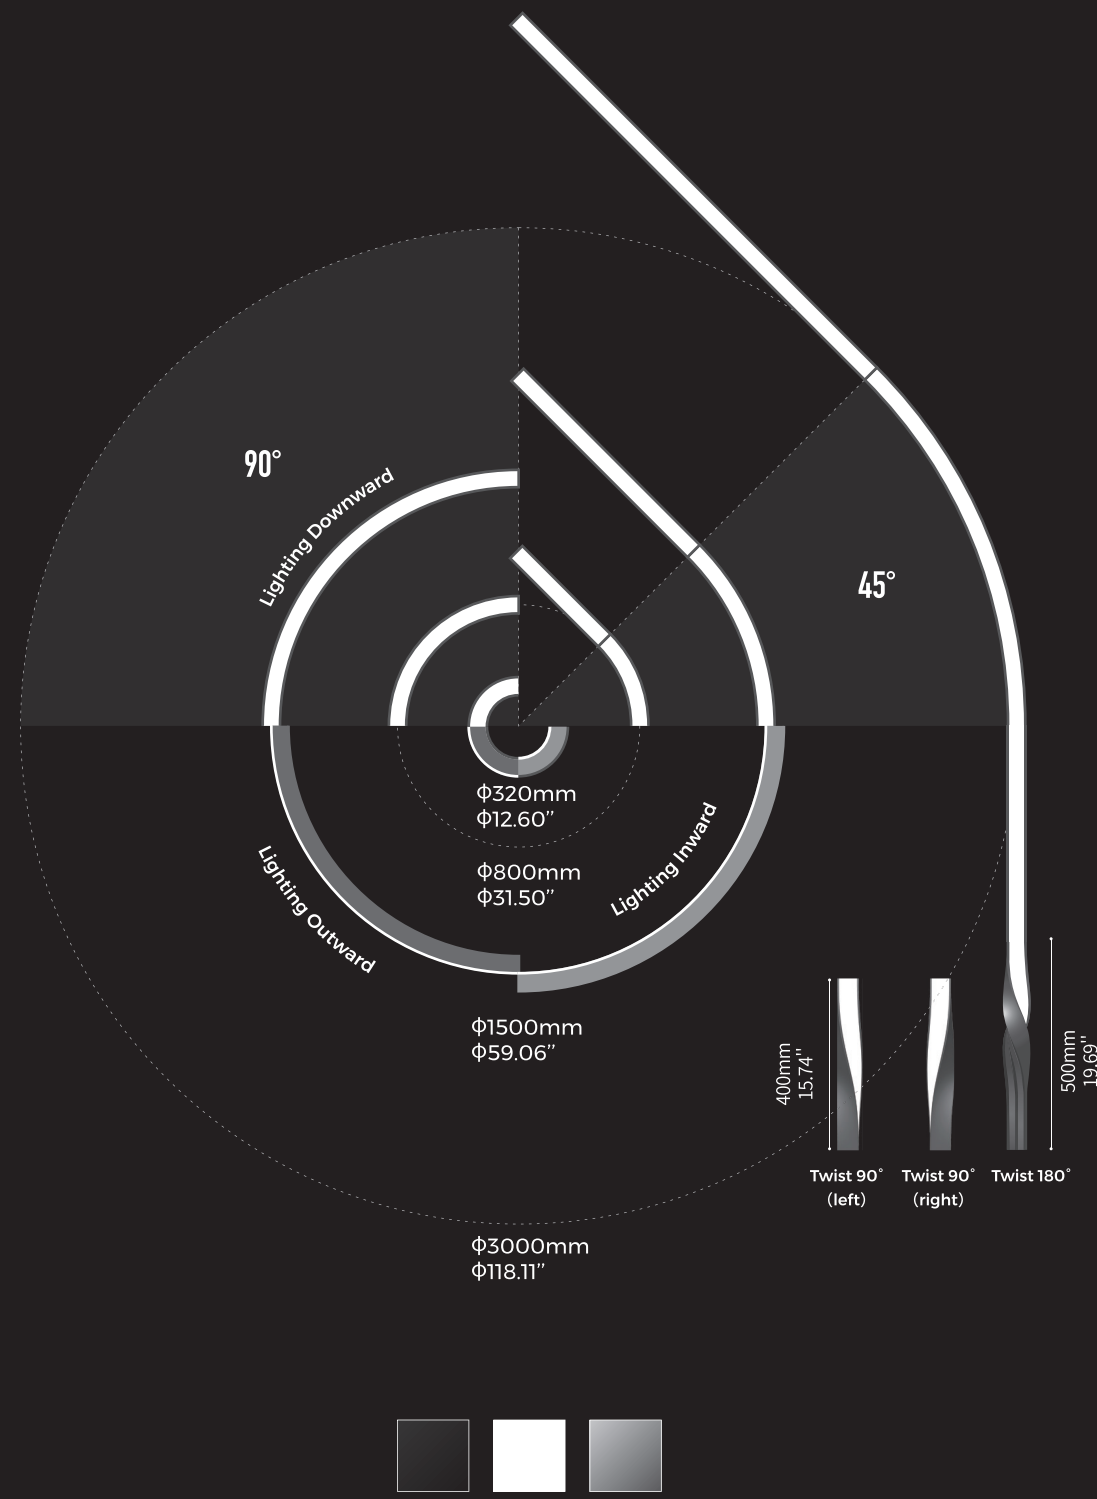

Product Overview

AH5060 Series

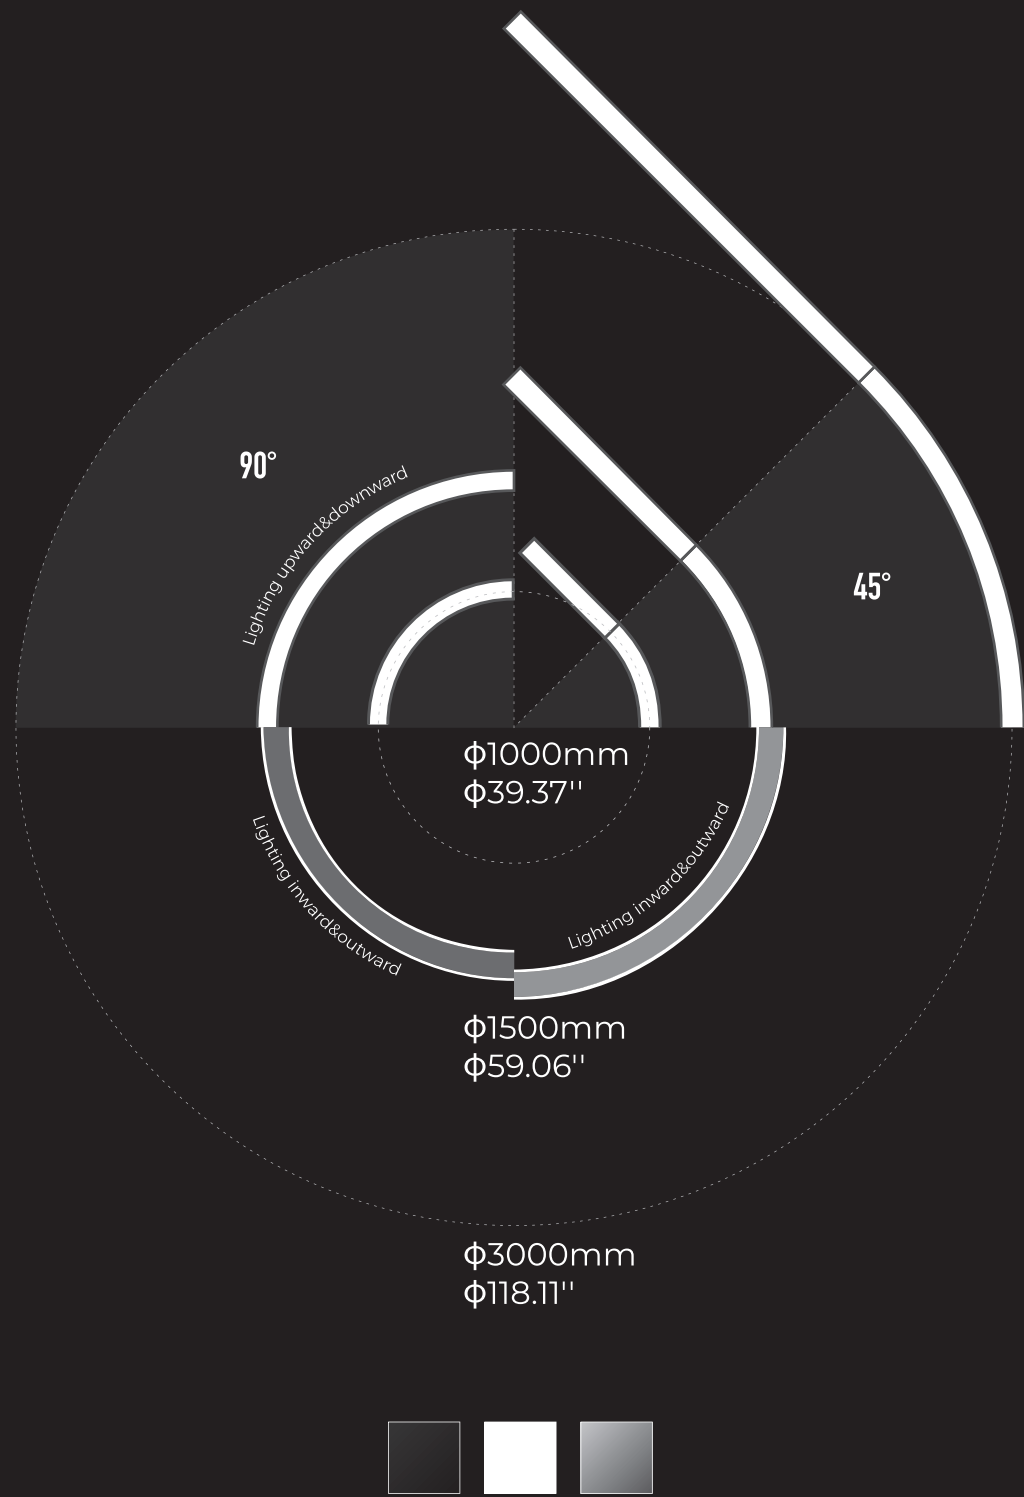

$\phi 1000\text{mm}$ (39.37"), Curve 90° (Lighting upward&downward), 45° Rigid Module

$\phi 1000\text{mm}$ (39.37"), Curve 45° (Lighting upward&downward), 45° Rigid Module

$\phi 1500\text{mm}$ (59.06"), Curve 90° (Lighting upward&downward), 45° Rigid Module


$\phi 1500\text{mm}$ (59.06"), Curve 45° (Lighting upward&downward), 45° Rigid Module

$\phi 1500\text{mm}$ (59.06"), Curve 90° (Lighting inward&outward), Flexible Strip


$\phi 1500\text{mm}$ (59.06"), Curve 90° (Lighting inward&outward), Flexible Strip

$\phi 3000\text{mm}$ (118.11"), Curve 45° (Lighting upward&downward), 22.5° Rigid Module


Straight Line (2500mm/98.43"), Rigid Module (499mm/19.65")

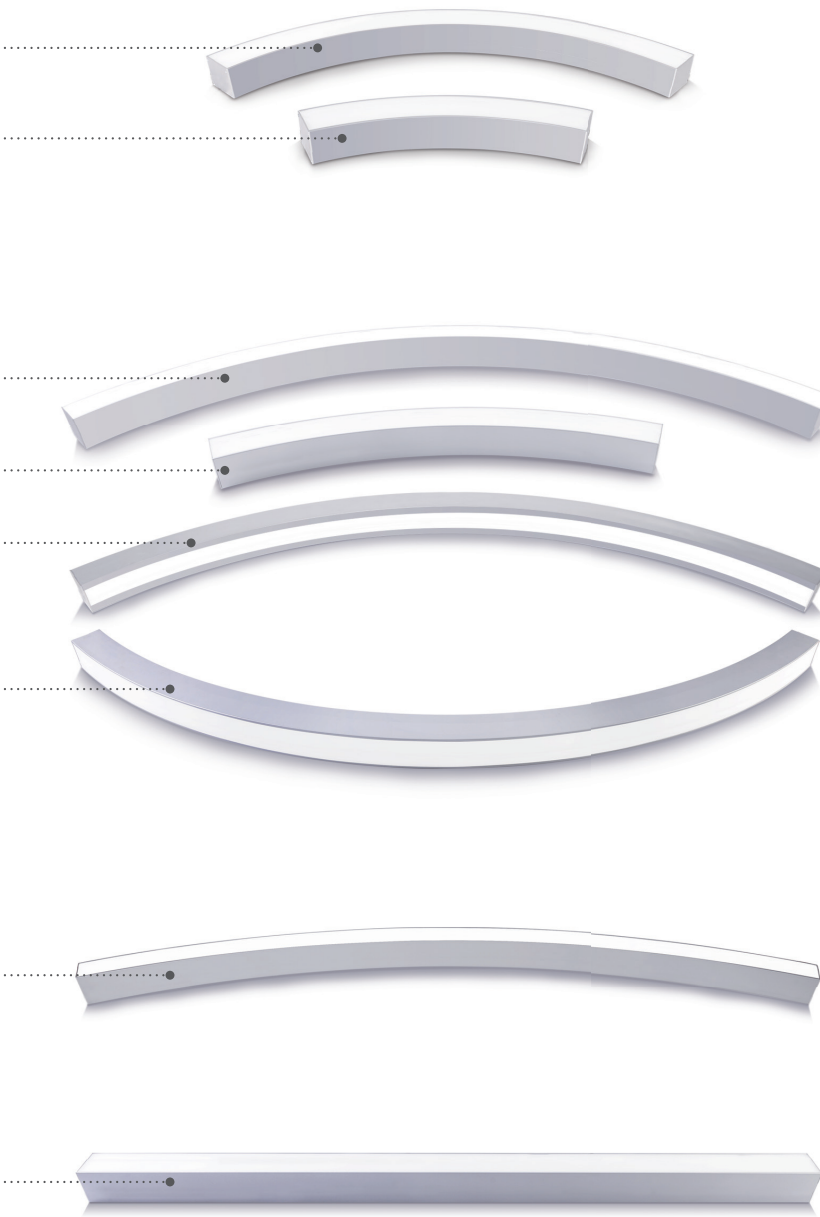


Features

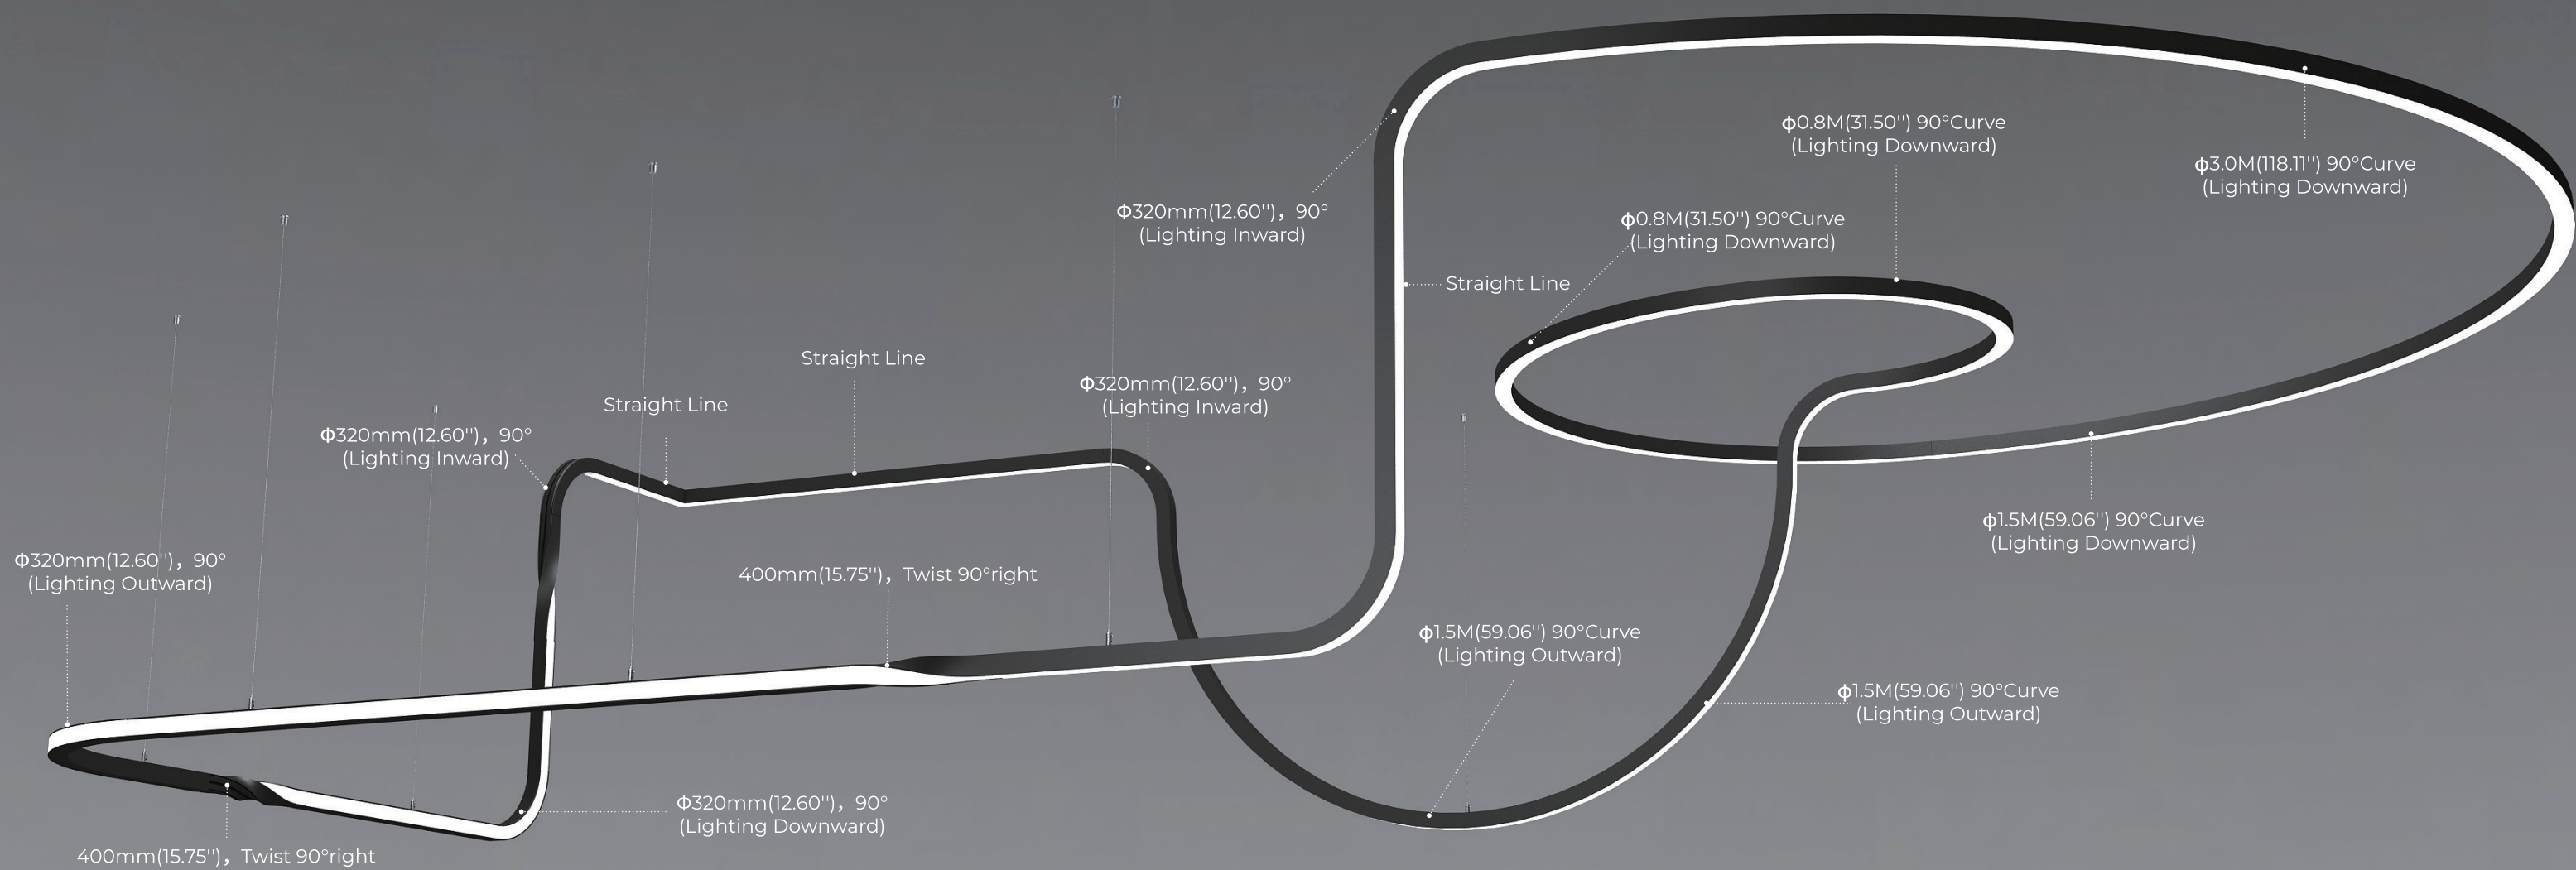


Modular design:
8 modules can be combined and interconnected freely according to the spatial design.

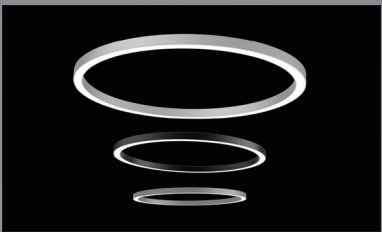

Circular Application:
Can be interconnected into circular shape with different diameters.

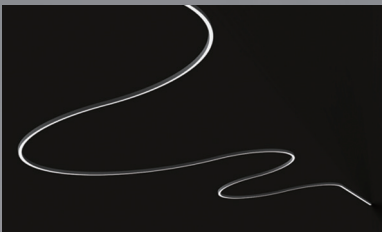


Curve Application:
Can be interconnected into curves with different radians.

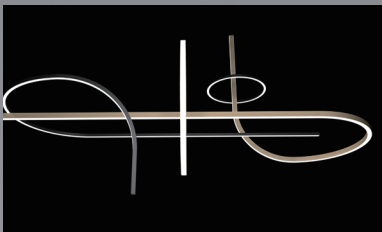

Lighting upward&Downward:
AH5060 series acan can achieve lighting upward&Downward.




Flexible diffuser:
20m(65.6ft)/ roll flexible diffuser, can achieve ultra-long leak-proof application in 3D space without needs of splicing. Different radians share the same diffuser.

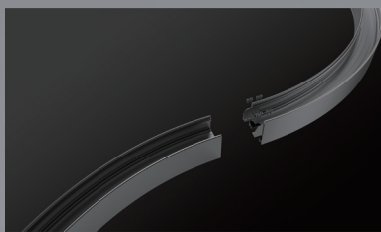

Leak-proof splicing:
Brand-new splicing bars, convenient to use and can achieve leak-proof lighting effect.



AS3535-2500

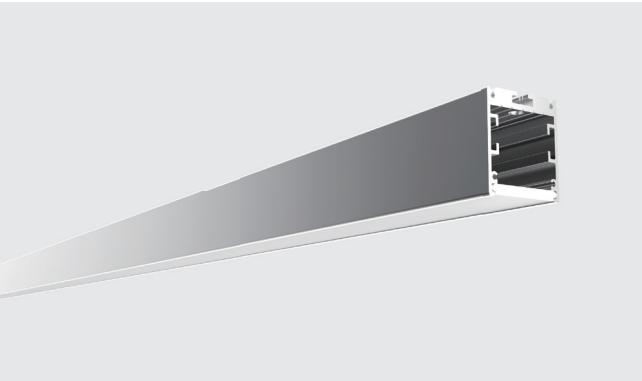

Profile components		
Profile	AS3535-2500 35X35X2500mm 1.38"x1.38"x98.43"	
Diffuser	CV-AS3535FD L20000XW32XH3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AS3535 35X35X1.5mm 1.38"x1.38"x0.06"	

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm M0.14"x1.57"	
Trimless recessed accessory	RE-13 78X34X15mm 3.07"x1.34"x0.59"	


Interconnection Accessory		
Splicing bar	EX-26 25X23.5X4.6mm 0.98"x0.93"x0.18"	

Light Source							
Flexible strip		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K

Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DMA120-24V-15MM	/	720LM/M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	120LEDs	6LEDs/ 50mm 6LEDs/ 1.97"
DA168-24V-15MM	/	815LM/M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"x0.59"x 0.06"	168LEDs	6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90	2880LM/M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"x0.59"x 0.06"	320LEDs	8LEDs/ 50mm 8LEDs/ 1.97"

Rigid module							
Rigid module		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm	>80 >90	1440LM/ pcs	24V	9.6W/ pcs	499x20x5.8mm 19.65"x0.79"x 0.23"	80LEDs	16LEDs/ 100mm 16LEDs/ 3.94"

Basic Parameters	
Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

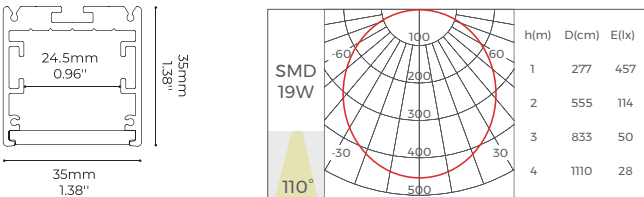

Control		
Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

AS3535-03A90





Profile components		
Profile	AS3535-03A90 35X35mm, D320mm, 90° 1.38"x1.38", D12.60", 90°	
Diffuser	CV-AS3535FD L20000XW32XH3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AS3535 35X35X1.5mm 1.38"x1.38"x0.06"	

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm M0.14"x1.57"	
Trimless recessed accessory	RE-13 78X34X15mm 3.07"x1.34"x0.59"	

Light Source		
Rigid Module		2700 K 3000 K 3500 K 4000 K 5000 K 6500 K

Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-03A90	>80 >90	810LM/M 247LM/ft	24V	5.4W/ m 1.6W/ft	D320x90°x20 x5.8mm D12.60"x90°x 0.79"	48LEDs	16LEDs

Basic Parameters	
Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

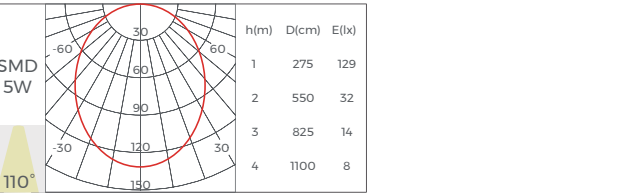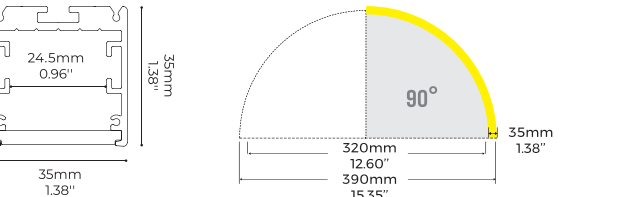

h(m)	D(cm)	E(lx)
1	275	129
2	550	32
3	825	14
4	1100	8



AS3535-03N90



Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Inward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-03N90 35×35mm, D320mm, 90° 1.38"×1.38", D12.60", 90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

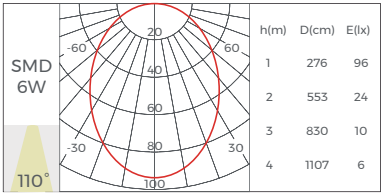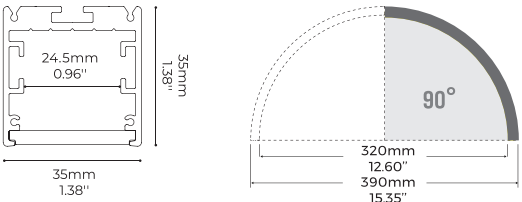

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm M0.14"×1.57"	

Light Source							
Flexible strip							
Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"×0.59"× 0.06"	160LEDs/ 50mm 8LEDs/ 1.97"	
DMA120-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"×0.59"× 0.06"	120LEDs/ 50mm 6LEDs/ 1.97"	
DA168-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"×0.59"× 0.06"	168LEDs/ 35.7mm 6LEDs/ 10.88"	
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"×0.59"× 0.06"	320LEDs/ 50mm 8LEDs/ 1.97"	

Control

Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	



AS3535-03W90



Basic Parameters

Installation	Pendant, Ceiling
Lighting direction	Outward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile components		
Profile	AS3535-03W90 35×35mm, D320mm, 90° 1.38"×1.38", D12.60", 90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

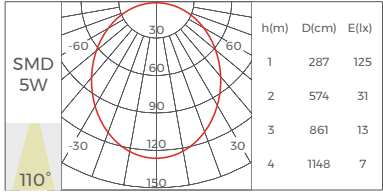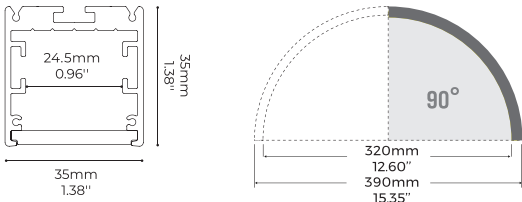

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm M0.14"×1.57"	

Light Source							
Flexible strip							
Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"×0.59"× 0.06"	160LEDs/ 50mm 8LEDs/ 1.97"	
DMA120-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"×0.59"× 0.06"	120LEDs/ 50mm 6LEDs/ 1.97"	
DA168-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"×0.59"× 0.06"	168LEDs/ 35.7mm 6LEDs/ 10.88"	
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"×0.59"× 0.06"	320LEDs/ 50mm 8LEDs/ 1.97"	



AS3535-08A45/90

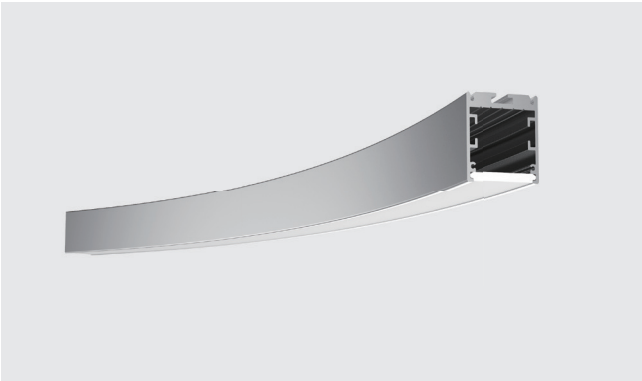

Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-08A45/90 35×35mm,D800mm,45°/90° 1.38"×1.38",D31.50",45°/90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

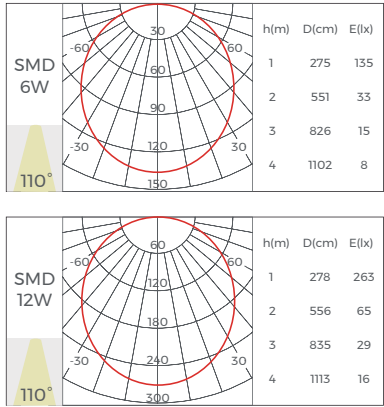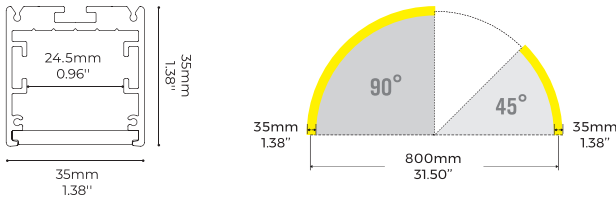


Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ250x20x0.6mm φ9.84"×0.79"×0.02"	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm M0.14"×1.57"	
Trimless recessed accessory	RE-13 78×34×15mm 3.07"×1.34"×0.59"	

Interconnection Accessory		
Splicing bar	EX-26 25×23.5×4.6mm 0.98"×0.93"×0.18"	

Light Source							
Rigid Module		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-08A45	>80 >90	870LM/ pcs	24V	5.8W/ pcs	D800x45"×20x 5.8mm D31.50"×45"× 0.79"×0.23"	48LEDs	16LEDs



AS3535-15A45/90

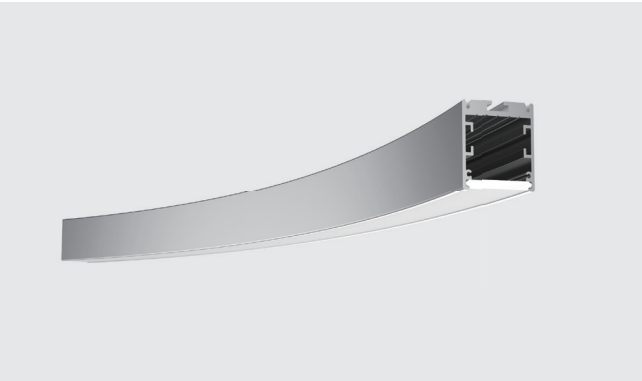

Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-15A45/90 35×35mm,D1500mm,45°/90° 1.38"×1.38",D59.06",45°/90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

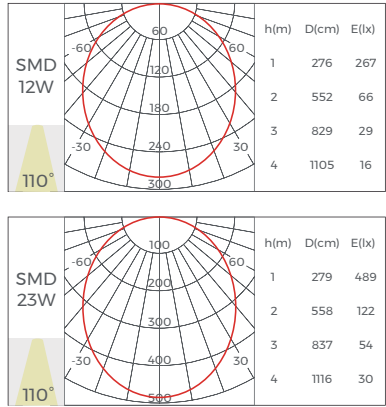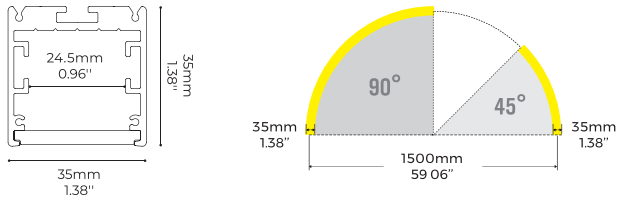


Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C φ350x20x0.6mm φ13.78"×0.79"×0.02"	
Mounting clip	CL-05	
Screw set	CL-01 M3.5x40mm M0.14"×1.57"	
Trimless recessed accessory	RE-13 78×34×15mm 3.07"×1.34"×0.59"	

Interconnection Accessory		
Splicing bar	EX-26 25×23.5×4.6mm 0.98"×0.93"×0.18"	



Light Source							
Rigid Module		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-15A45	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D1500x45"×20 x5.8mm D59.06"×45"× 0.79"×0.23"	96LEDs	16LEDs

AS3535-15N90

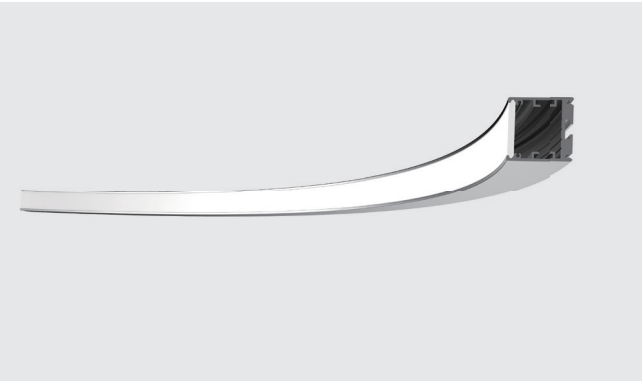

Basic Parameters	
Installation	Pendant, Ceiling
Lighting direction	Inward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-15N90 35x35mm, D1500mm, 90° 1.38"x1.38",D59.06",90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"x1.38"x0.06"	

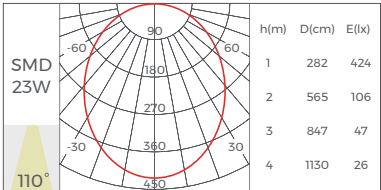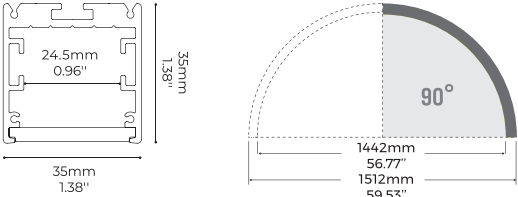

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C Φ350x20x0.6mm Φ13.78"x0.79"x0.02"	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm M0.14"x1.57"	

Interconnection Accessory		
Splicing bar	EX-26 25×23.5×4.6mm 0.98"x0.93"x0.18"	



Light Source							
Flexible strip		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DMA120-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	120LEDs	6LEDs/ 50mm 6LEDs/ 1.97"
DA168-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"x0.59"x 0.06"	168LEDs	6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"x0.59"x 0.06"	320LEDs	8LEDs/ 50mm 8LEDs/ 1.97"

Control		
Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

AS3535-15W90



Profile components		
Profile	AS3535-15W90 35x35mm, D1500mm, 90° 1.38"x1.38",D59.06",90°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"x1.38"x0.06"	

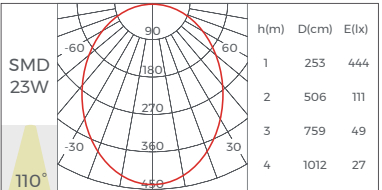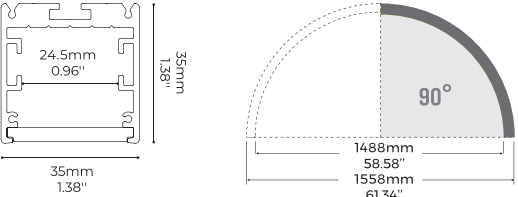


Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Pendant accessory	PY-C Φ350x20x0.6mm Φ13.78"x0.79"x0.02"	
Mounting clip	CL-04	
Screw set	CL-01 M3.5x40mm M0.14"x1.57"	

Interconnection Accessory		
Splicing bar	EX-26 25×23.5×4.6mm 0.98"x0.93"x0.18"	

Light Source							
Flexible strip		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DMA120-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	120LEDs	6LEDs/ 50mm 6LEDs/ 1.97"
DA168-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"x0.59"x 0.06"	168LEDs	6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"x0.59"x 0.06"	320LEDs	8LEDs/ 50mm 8LEDs/ 1.97"

Control		
Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

AS3535-30A45

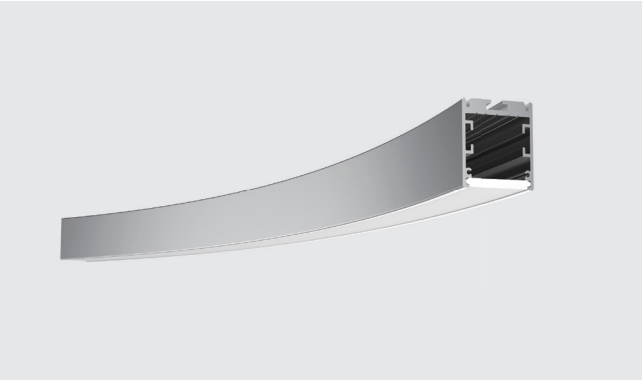

Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-30A45 35×35mm,D3000mm,45° 1.38"×1.38",D118.11",45°	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	
Mounting clip	CL-05	
Screw set	CL-01 M3.5×40mm M0.14"×1.57"	
Trimless recessed accessory	RE-I3 78×34×15mm 3.07"×1.34"×0.59"	

Interconnection Accessory		
Splicing bar	EX-26 25×23.5×4.6mm 0.98"×0.93"×0.18"	

Light Source

Rigid Module

2700
K

3000
K

3500
K



4000
K

5000
K

6500
K



Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V- 20mm-30A23	>80 >90	1740LM/ pcs	24V	11.6W/ pcs	D3000x22.5"x 20x5.8mm D118.11x22.5"x 0.79"x0.23"	96LEDs	16LEDs

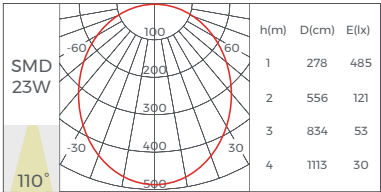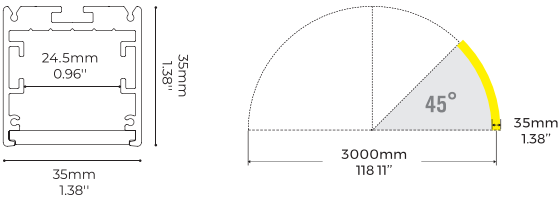

AS3535-04T90L



Basic Parameters

Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components		
Profile	AS3535-04T90L 35×35×400mm,twist 90° left 1.38"×1.38"×15.75",twist 90° left	
Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40"×1.26"×0.14"	
End cap	EC-AS3535 35×35×1.5mm 1.38"×1.38"×0.06"	

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-K	

Light Source

Flexible strip

2700K

3000K



3500K

4000K

5000K

6500K

Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DMAI20-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"x0.59"x 0.06"	120LEDs	6LEDs/ 50mm 6LEDs/ 1.97"
DAI68-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"x0.59"x 0.06"	168LEDs	6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"x0.59"x 0.06"	320LEDs	8LEDs/ 50mm 8LEDs/ 1.97"

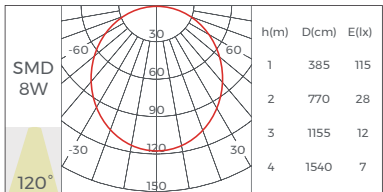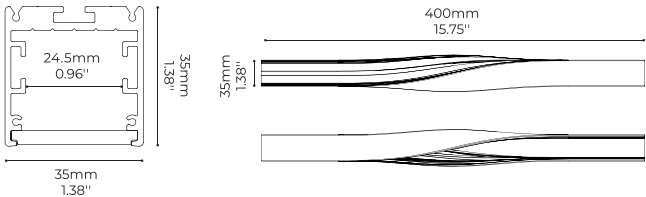

Control		
Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

AS3535-04T90R





Basic Parameters	
Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components	
Profile	AS3535-04T90R 35X35X400mm,twist 90° right 1.38"x1.38"x15.75",twist 90° right
Diffuser	CV-AS3535FD L20000XW32XH3.5mm 787.40"x1.26"x0.14"
End cap	EC-AS3535 35X35X1.5mm 1.38"x1.38"x0.06"

Installation Accessory	
Pendant cable	PN-W
Pendant cable (wire and pendant cable in one)	PE-K

Light Source	
Flexible strip	
2700 K 3000 K 3500 K 4000 K 5000 K 6500 K	
Model	CRI Lumens (4000K)z Voltage Typ.power Size LEDs/ m Cutting unit
DS8160-24V-15mm	>80 2880LM/M 878LM/ft 24V 19.2W/ m 5.9W/ft 5000x15x1.5mm 196.85"x0.59"x 0.06" 160LEDs 8LEDs/ 50mm 8LEDs/ 1.97"
DMA120-24V-15MM	/ 720LM/ M 219LM/ft 24V 25W/ m 7.6W/ft 5000x15x1.5mm 196.85"x0.59"x 0.06" 120LEDs 6LEDs/ 50mm 6LEDs/ 1.97"
DA168-24V-15MM	/ 815LM/ M 248LM/ft 24V 20W/ m 6.1W/ft 4000x15x1.5mm 157.48"x0.59"x 0.06" 168LEDs 6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90 2880LM/ M 878LM/ft 24V 38.4W/ m 11.7W/ft 4000x20x1.5mm 157.48"x0.59"x 0.06" 320LEDs 8LEDs/ 50mm 8LEDs/ 1.97"

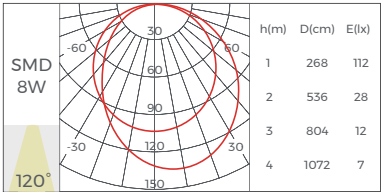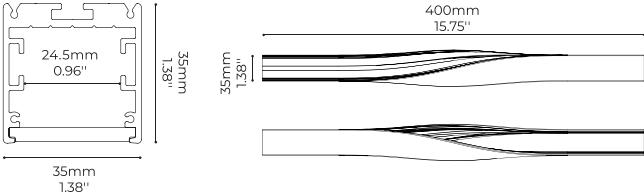

Control	
Programmable digital controller	K-1000C
Programmable digital controller	K-8000C
RGB control receiver	CR3-GBA
RGBW Remote	CK4-GBA
CCT control receiver	CR2-GBA
CCT Remote	CK2-GBA

AS3535-05T180





Basic Parameters	
Installation	Pendant, Ceiling, Trimless recessed
Lighting direction	Downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile components	
Profile	AS3535-05T180 35X35X500mm,twist 180° 1.38"x1.38"x19.69",twist 180°
Diffuser	CV-AS3535FD L20000XW32XH3.5mm 787.40"x1.26"x0.14"
End cap	EC-AS3535 35X35X1.5mm 1.38"x1.38"x0.06"


Installation Accessory	
Pendant cable	PN-W
Pendant cable (wire and pendant cable in one)	PE-K

Light Source	
Flexible strip	
2700 K 3000 K 3500 K 4000 K 5000 K 6500 K	
Model	CRI Lumens (4000K)z Voltage Typ.power Size LEDs/ m Cutting unit
DS8160-24V-15mm	>80 2880LM/M 878LM/ft 24V 19.2W/ m 5.9W/ft 5000x15x1.5mm 196.85"x0.59"x 0.06" 160LEDs 8LEDs/ 50mm 8LEDs/ 1.97"
DMA120-24V-15MM	/ 720LM/ M 219LM/ft 24V 25W/ m 7.6W/ft 5000x15x1.5mm 196.85"x0.59"x 0.06" 120LEDs 6LEDs/ 50mm 6LEDs/ 1.97"
DA168-24V-15MM	/ 815LM/ M 248LM/ft 24V 20W/ m 6.1W/ft 4000x15x1.5mm 157.48"x0.59"x 0.06" 168LEDs 6LEDs/ 35.7mm 6LEDs/ 10.88"
DS8320-24V-15MM	>80 >90 2880LM/ M 878LM/ft 24V 38.4W/ m 11.7W/ft 4000x20x1.5mm 157.48"x0.59"x 0.06" 320LEDs 8LEDs/ 50mm 8LEDs/ 1.97"

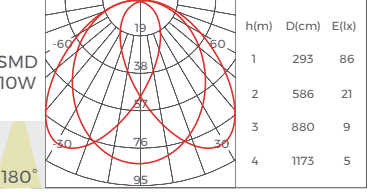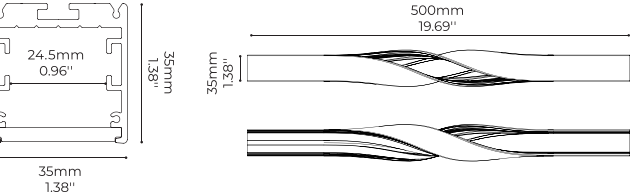

Control	
Programmable digital controller	K-1000C
Programmable digital controller	K-8000C
RGB control receiver	CR3-GBA
RGBW Remote	CK4-GBA
CCT control receiver	CR2-GBA
CCT Remote	CK2-GBA

AH5060-2500

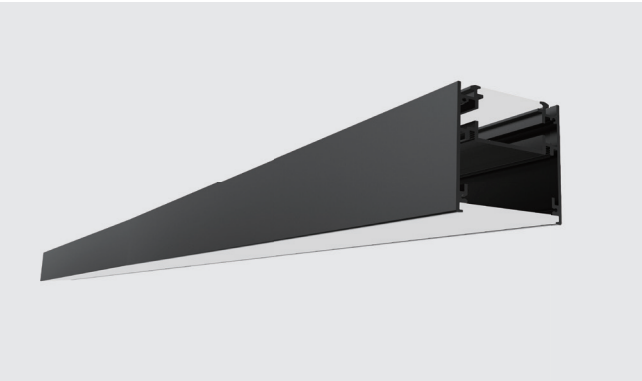

Profile components		
Profile	AH5060-2500 L2500X W50X H60mm 98.43"x1.97"x2.36"	
50 Diffuser	CV-AH5060FD L20000X W47X H4mm 787.40"x1.85"x0.16"	
35 Diffuser	CV-AS3535FD L20000X W32X H3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AH5060 L60X W50X H2mm 2.36"x1.97"x0.08"	


Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5X20X12mm 1.56"x0.79"x0.47"	
Mounted Screw	CL-15 M3.5x50mm M0.14"x1.97"	

Interconnection Accessory		
Splicing bar	EX-25 25X32X8.5mm 0.98"x1.26"x0.33"	

Light Source								
Flexible strip			2700 K 3000 K 3500 K 4000 K 5000 K 6500 K					
Model	CRI	Lumens (4000K)z	Voltage	Typ.power	Size	LEDs/ m	Cutting unit	
DS8160-24V-15mm	>80	2880LM/M 878LM/ft	24V	19.2W/ m 5.9W/ft	5000x15x1.5mm 196.85"x0.59"x0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"	
DMA120-24V-15MM	/	720LM/ M 219LM/ft	24V	25W/ m 7.6W/ft	5000x15x1.5mm 196.85"x0.59"x0.06"	120LEDs	6LEDs/ 50mm 6LEDs/ 1.97"	
DAI68-24V-15MM	/	815LM/ M 248LM/ft	24V	20W/ m 6.1W/ft	4000x15x1.5mm 157.48"x0.59"x0.06"	168LEDs	6LEDs/ 35.7mm 6LEDs/ 10.88"	
DS8320-24V-15MM	>80 >90	2880LM/ M 878LM/ft	24V	38.4W/ m 11.7W/ft	4000x20x1.5mm 157.48"x0.59"x0.06"	320LEDs	8LEDs/ 50mm 8LEDs/ 1.97"	

Rigid module								
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit	
DY8160-24V-20mm	>80 >90	1440LM/ pcs	24V	9.6W/ pcs	499x20x5.8mm 19.65"x0.79"x0.23"	80LEDs	16LEDs/ 100mm 16LEDs/ 3.94"	

Basic Parameters	
Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	RoHS, Reach

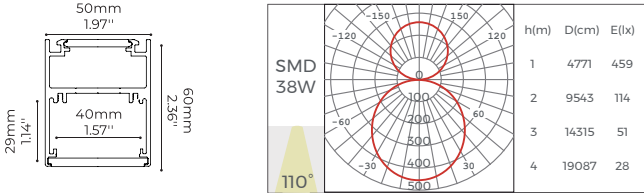

Control		
Programmable digital controller	K-1000C	
Programmable digital controller	K-8000C	
RGB control receiver	CR3-GBA	
RGBW Remote	CK4-GBA	
CCT control receiver	CR2-GBA	
CCT Remote	CK2-GBA	

AH5060-10A45/90






Profile components		
Profile	AH5060-10A45/90 50X60,D1000mm,45°/ 90° 1.97"x2.36",D39.37",45°/ 90°	
50 Diffuser	CV-AH5060FD L20000X W47X H4mm 787.40"x1.85"x0.16"	
35 Diffuser	CV-AS3535FD L20000X W32X H3.5mm 787.40"x1.26"x0.14"	
End cap	EC-AH5060 L60X W50X H2mm 2.36"x1.97"x0.08"	

Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5X20X12mm 1.56"x0.79"x0.47"	
Mounted Screw	CL-15 M3.5x50mm M0.14"x1.97"	

Interconnection Accessory		
Splicing bar	EX-25 25X32X8.5mm 0.98"x1.26"x0.33"	

Light Source								
Rigid Module			2700 K 3000 K 3500 K 4000 K 5000 K 6500 K					
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit	
DY8160-24V-20mm-10A45	>80 >90	1125LM/ pcs	24V	7.5W/ pcs	D1000x45"x20x5.8mm 39.37"x45"x0.79"x0.23"	64LEDs	16LEDs	

Basic Parameters	
Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	RoHS, Reach

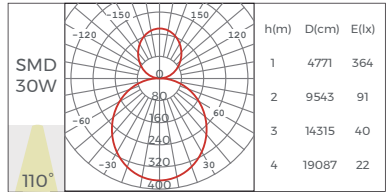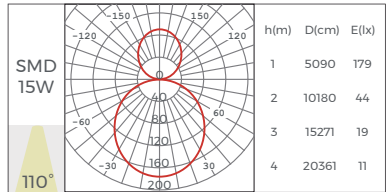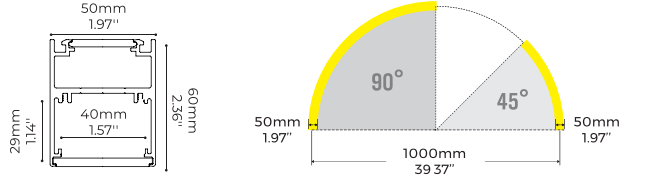

AH5060-15A45/90






Profile components		
Profile	AH5060-15A45/90 50×60,D1500mm,45°/ 90° 1.97'x2.36',D59.06',45°/ 90°	
50 Diffuser	CV-AH5060FD L20000×W47×H4mm 787.40'x1.85'x0.16"	
35 Diffuser	CV-AS3535FD L20000×W32×H3.5mm 787.40'x1.26'x0.14"	
End cap	EC-AH5060 L60×W50×H2mm 2.36'x1.97'x0.08"	


Installation Accessory		
Pendant cable	PN-W	
Pendant cable (wire and pendant cable in one)	PE-C	
Pendant Clips	CP-29 39.5×20×12mm 1.56'x0.79'x0.47"	
Mounted Screw	CL-15 M3.5x50mm M0.14'x1.97"	

Interconnection Accessory		
Splicing bar	EX-25 25X32X8.5mm 0.98'x1.26'x0.33"	

Light Source							
Rigid Module		2700 K	3000 K	3500 K	4000 K	5000 K	6500 K
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/ pcs	Cutting unit
DY8160-24V-20mm-15A45	>80 >90	T740LM/ pcs	24V	11.6W/ pcs	D1500x45°x20x 5.8mm 59.06'x45°x 0.79'x0.23"	64LEDs	16LEDs

Basic Parameters	
Installation	Pendant, Ceiling
Lighting direction	Upward&downward
Material	AL6063-T5, spraying surface
Coating	Silver, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach













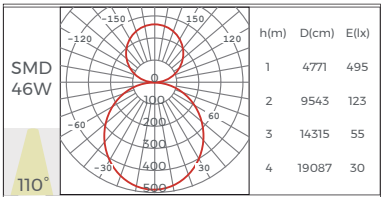
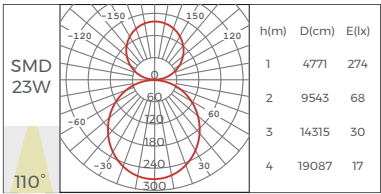
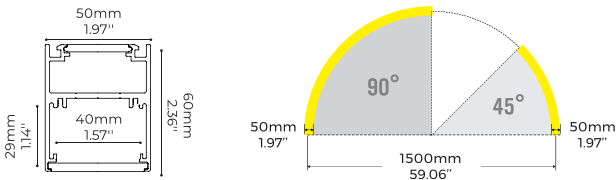


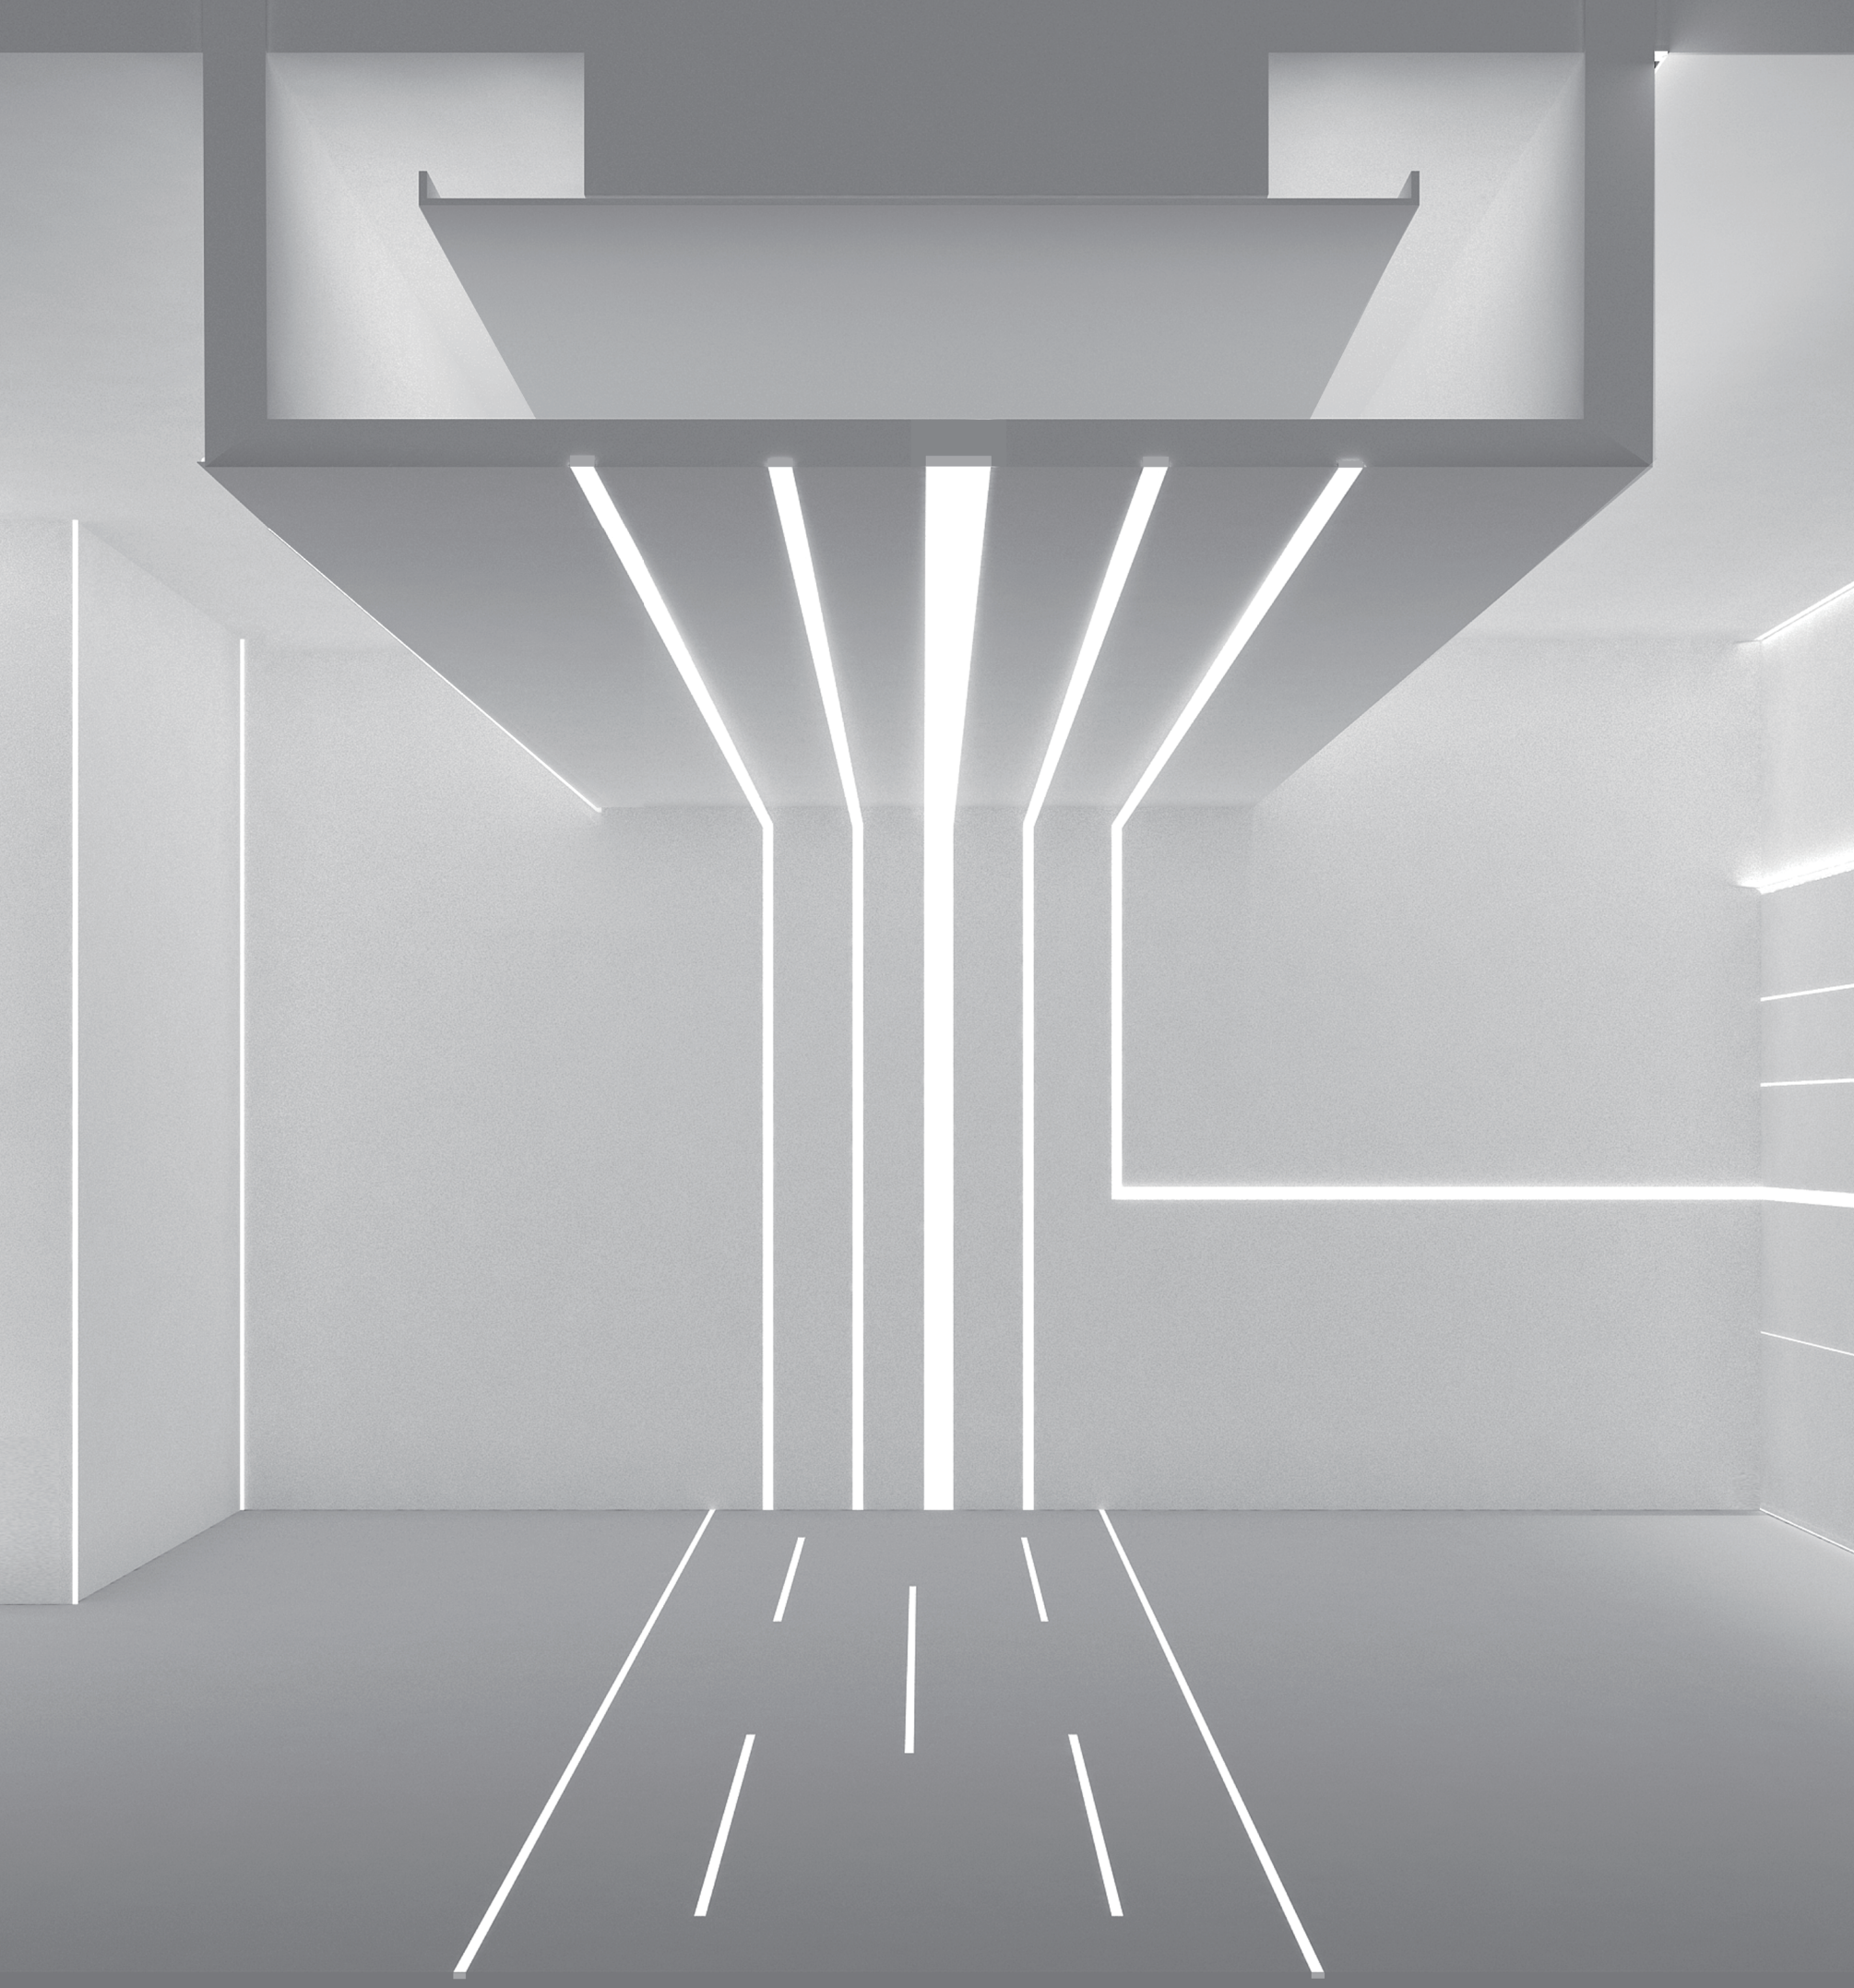

ALS



ALS Series, min. to 5mm(0.20") in width, is designed for linear lights to perfectly fit into architectural settings such as plastered line, skirting board, corner, wall edge and floor etc. to achieve integrated lighting, full light look but in small profile.

Product Overview

Ceiling	Pendant	Recessed			Trimless-Recessed	Corner	Vario		
LS0709  7.6x9MM 0.30"x0.35"	LS0812  7.8x12MM 0.31"x0.47"	LS3535  35x35MM 1.38"x1.38"	LE1212  12x12MM 0.47"x0.47"	LE1410  14x10MM 0.55"x0.39"	LR0812  47.8x12MM 1.88"x0.47"	LR1613  56x13MM 2.20"x0.51"	LG2323  40.3x24.3MM 1.59"x0.96"	LG2727  44.9x22.2MM 1.77"x0.87"	LG7043  70x43MM 2.76"x1.69"
LS1010  10x10MM 0.39"x0.39"	LS1510  15x10MM 0.59"x0.39"	LS5050  50x50MM 1.97"x1.97"	LE1910  19x10MM 0.75"x0.39"	LE2409  24x9MM 0.94"x0.35"	LR2013  60x13MM 2.36"x0.51"	LR2522  65x22MM 2.56"x0.87"	LG1616C(N)  16x16MM 0.63"x0.63"	LG1616K(N)  16x16MM 0.63"x0.63"	SK6013(A)  60x13.2MM 2.36"x0.52"
LS1607  16x7MM 0.63"x0.28"	LS1613  16x13MM 0.63"x0.51"	LH25100  25x100MM 0.98"x3.94"	LE2507  25x7MM 0.98"x0.28"	LE2513  25x13MM 0.98"x0.51"	LR3735  99x35MM 3.90"x1.38"	LR3924  85x24MM 3.35"x0.94"	LG2020C  20x20MM 0.79"x0.79"	LG3030C  30x30MM 1.18"x1.18"	SK6013(B)  60x13.2MM 2.36"x0.52"
LS1612L  16x18MM 0.63"x0.71"	LS1911C  19.7x19.6MM 0.78"x0.77"	LT30  30x30MM 1.18"x1.18"	LE3523  35x23MM 1.38"x0.91"		LR5535(A)  95x35MM 3.74"x1.38"	LR5535(B)  93x35MM 3.66"x1.38"	LG3030K  30x30MM 1.18"x1.18"	LR1616  38.4x36.5MM 1.51"x1.44"	SK8513(B)  85x13.2MM 3.35"x0.52"
LS1911K  19.7x19.7MM 0.78"x0.78"	LS2013  20x13MM 0.79"x0.51"	LT60  60x60MM 2.36"x2.36"					LR3840(A)  64.5x60MM 2.54"x2.36"	LR3840(B)  73.3x40MM 2.89"x1.57"	LS2126  21.4x27MM 0.84"x1.06"
LS2020  20x20MM 0.79"x0.79"	LS2522  25x22.5MM 0.98"x0.89"								LE2711  27.1x11MM 1.07"x0.43"



LS0709

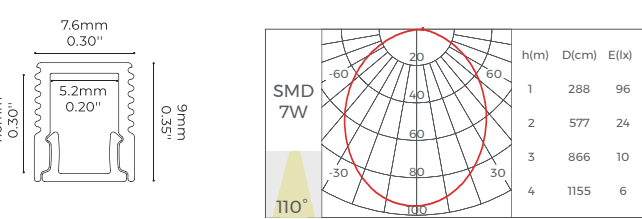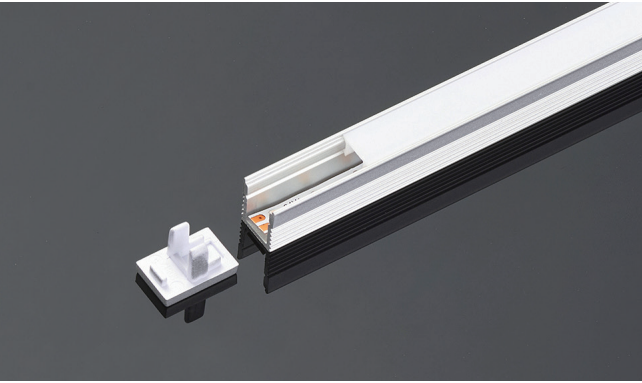

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500×W7.6×H9mm 98.43"×0.30"×0.35"
Diffuser	L2500×W6.4×H3.7mm 98.43"×0.25"×0.15"
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm 98.43"×0.25"×0.15"
Holeless end caps	EC-LS0709 L8×W7.6×H9mm 0.31"×0.30"×0.35"


Installation Accessories	
Ceiling clip	CP-03 L15×W9.2×H4.5mm 0.59"×0.36"×0.18"

Light Source



Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×4×1.2mm 196.85"×0.16"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LS0812

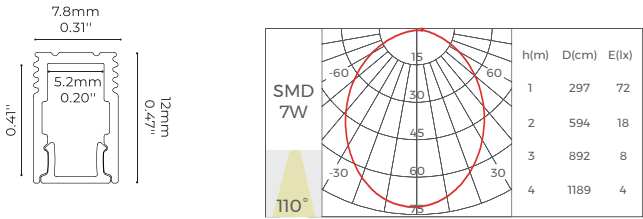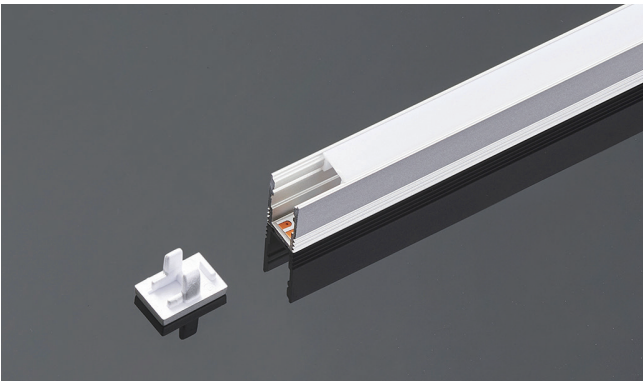

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500×W7.8×H12mm 98.43"×0.31"×0.47"
Diffuser	L2500×W6.4×H3.7mm 98.43"×0.25"×0.15"
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm 98.43"×0.25"×0.15"
Holeless end caps	EC-LS0812 L8×W7.8×H12mm 0.31"×0.31"×0.47"
End cap with hole	EC-LS0812 L8×W7.8×H12mm 0.31"×0.31"×0.47"


Installation Accessories	
Ceiling clip	CP-03 L15×W9.2×H4.5mm 0.59"×0.36"×0.18"

Light Source



Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×4×1.2mm 196.85"×0.16"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LS1010

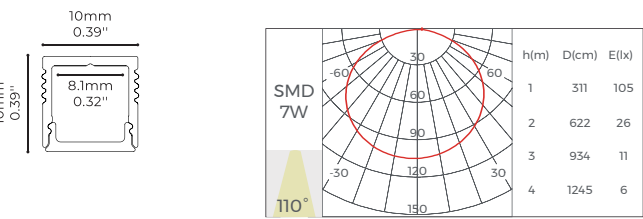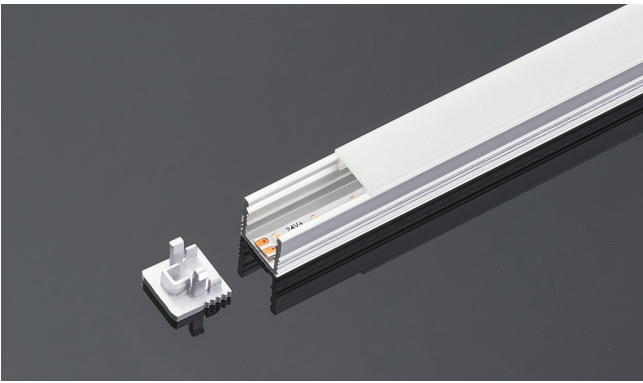

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components	
Profile	L2500×W10×H10mm 98.43"×0.39"×0.39"
Diffuser	L2500×W9.43×H3.06mm 98.43"×0.37"×0.12"
Black Diffuser	CV-LS1010 L2500×W9.43×H3.06mm 98.43"×0.37"×0.12"
Holeless end caps	EC-LS1010 L10×W10×H8mm 0.39"×0.39"×0.31"
End cap with hole	EC-LS1010 L10×W10×H8mm 0.39"×0.39"×0.31"

Installation Accessories	
Ceiling clip	CP-36 L12×W15×H4.5mm 0.47"×0.59"×0.18"



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LS1510

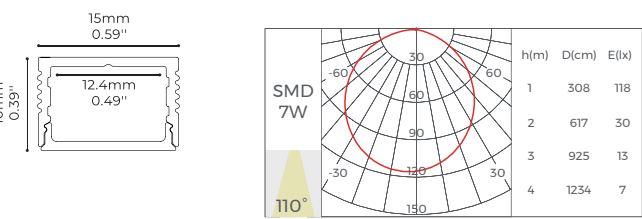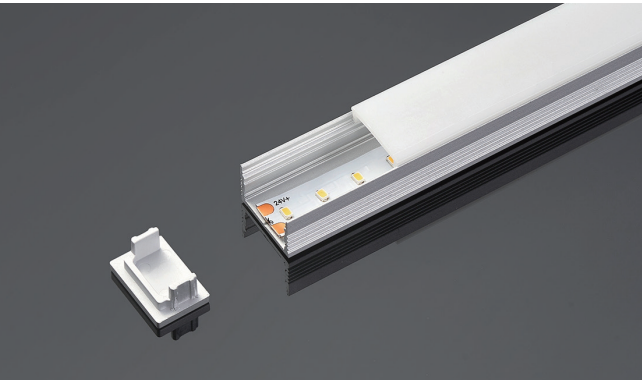

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components	
Profile	L2500×W15×H10mm 98.43"×0.59"×0.39"
Diffuser	L2500×W14.4×H3mm 98.43"×0.57"×0.12"
Black Diffuser	CV-LS1510 L2500×W14.4×H3mm 98.43"×0.57"×0.12"
Holeless end caps	EC-LS1510 L15×W10×H8mm 0.59"×0.39"×0.31"
End cap with hole	EC-LS1510 L15×W10×H8mm 0.59"×0.39"×0.31"

Installation Accessories	
Ceiling clip	CP-37 L17×W15×H4.5mm 0.67"×0.59"×0.18"


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LS1607

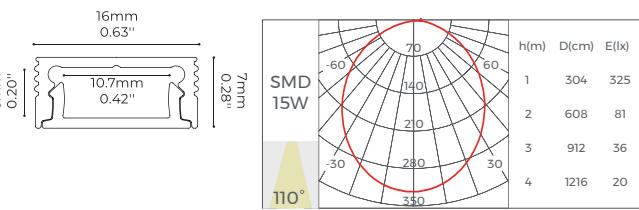


Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White



Profile Components		
Profile	L2500XW16XH7mm 98.43"x0.63"x0.28"	
Diffuser	L2500XW14.7XH4.5mm 98.43"x0.58"x0.18"	
White Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Black Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Holeless end caps	EC-LS1607 L6XW16XH7mm 0.24"x0.63"x0.28"	
End cap with hole	EC-LS1607 L6XW16XH7mm 0.24"x0.63"x0.28"	

Installation Accessories		
Ceiling clip	CP-04 17.8X15X4.5mm 0.70"x0.59"x0.18"	
0-180° adjustable Ceiling clip	CP-06 35X17.7X21.4mm 1.38"x0.70"x0.84"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m 503LM/ft	24V	15W/ m 4.6W/ ft	5000X8X 1.3mm 196.85"x0.31"x 0.05"	280LEDs	7LEDs/ 25mm 7LEDs/ 0.98"



LS1613

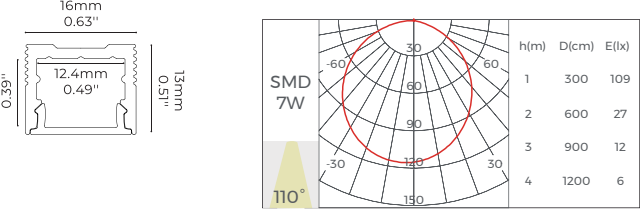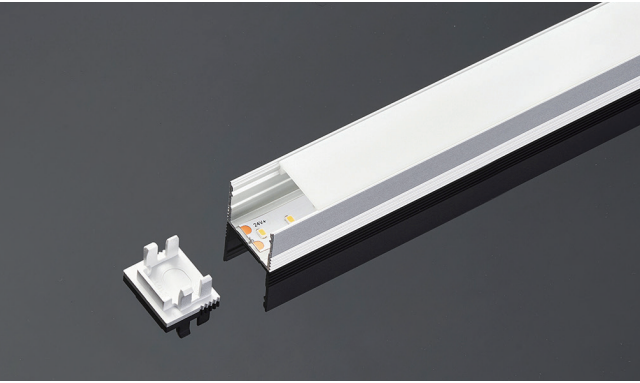


Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500XW16XH13mm 98.43"x0.63"x0.51"	
Diffuser	L2500XW14.7XH4.5mm 98.43"x0.58"x0.18"	
White Prismatic	L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Black Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Holeless end caps	EC-LS1613 L7XW16XH13mm 0.28"x0.63"x0.51"	
End cap with hole	EC-LS1613 L7XW16XH13mm 0.28"x0.63"x0.51"	

Installation Accessories		
Ceiling clip	CP-04 17.8X15X4.5mm 0.70"x0.59"x0.18"	
0-180° adjustable Ceiling clip	CP-06 35X17.7X21.4mm 1.38"x0.70"x0.84"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m 216LM/ ft	24V	6.6W/ m 2.0W/ ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LS1612L

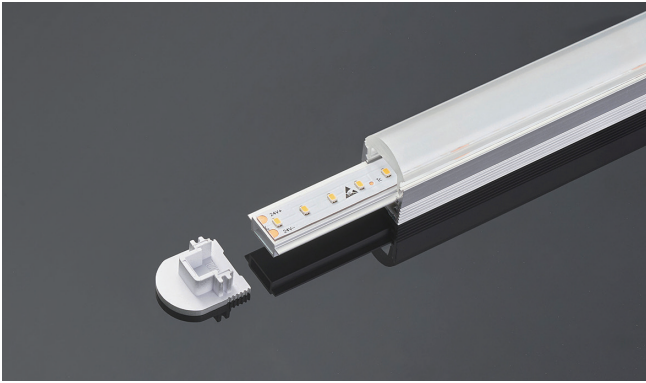





Profile Components		
Profile	L2500XW16XH12mm 98.43"x0.63"x0.47"	
Diffuser	L2500XW14.7XH4.5mm 98.43"x0.58"x0.18"	
Holeless end caps	EC-LS1612L L16XW7XH18mm 0.63"x0.28"x0.71"	
End cap with hole	EC-LS1612L L16XW7XH18mm 0.63"x0.28"x0.71"	

Installation Accessories		
Ceiling clip	CP-04 17.8X15X4.5mm 0.70"x0.59"x0.18"	
0-180° adjustable Ceiling clip	CP-06 35X17.7X21.4mm 1.38"x0.70"x0.84"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m 216LM/ ft	24V	6.6W/ m 2.0W/ ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

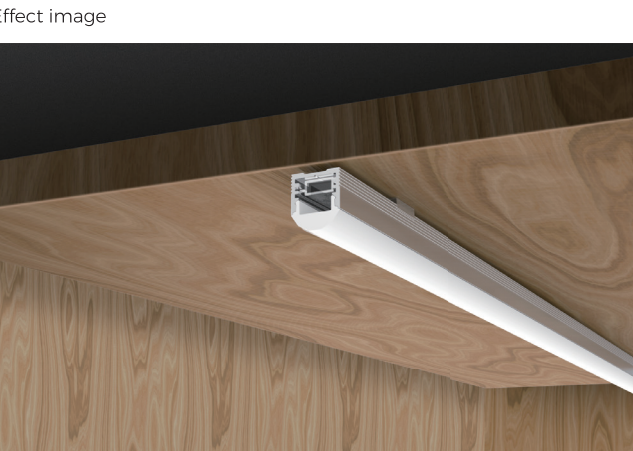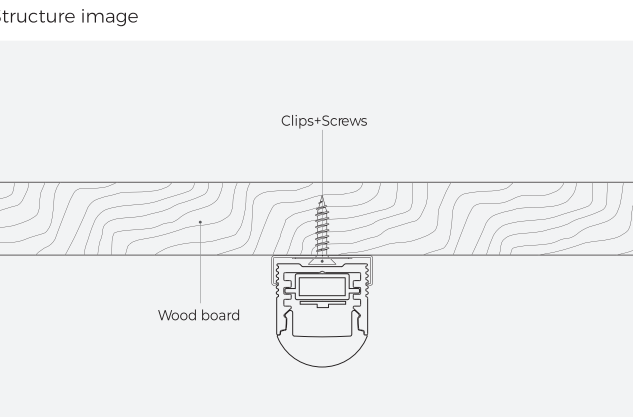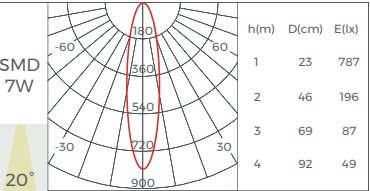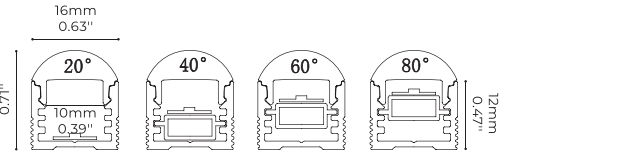

LS1911C



Basic Parameters



Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W19.7×H11.1mm 98.43"×0.78"×0.43"	
Diffuser	L2500×W19.7×H10.6mm 98.43"×0.78"×0.42"	
Holeless end caps	EC-LS1911C L19.7×W19.7×H5mm 0.78"×0.78"×0.20"	
End cap with hole	EC-LS1911K L19.7×W19.7×H5mm 0.78"×0.78"×0.20"	


Installation Accessories		
Ceiling clip	CP-07 38×15×4.5mm 1.50"×0.59"×0.18"	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	

Standard extenders		
180°/ "L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/ m 4.6W/ ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

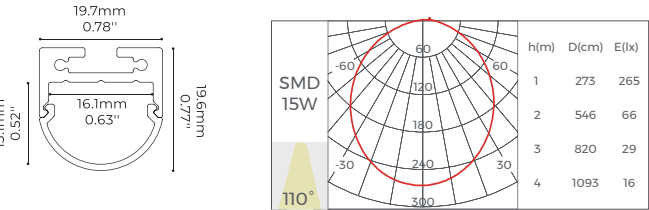


Structure image

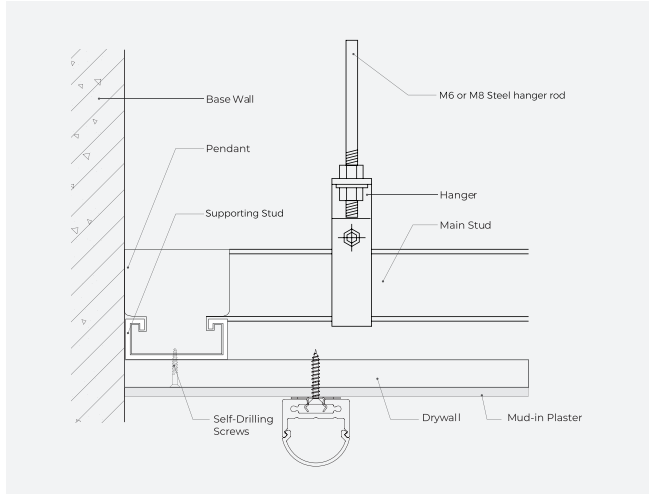

Effect image

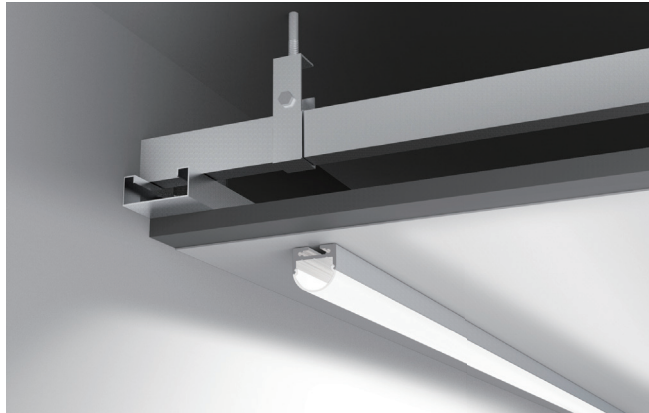

LS1911K

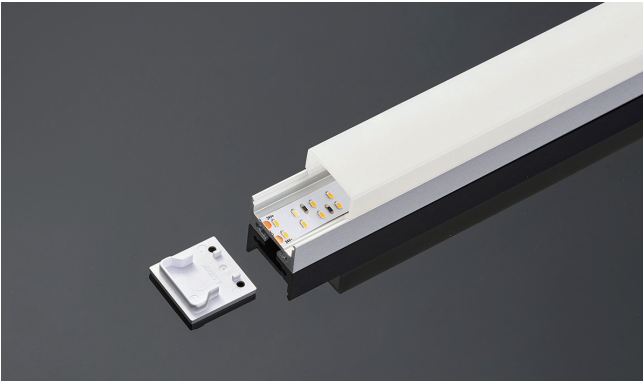

Basic Parameters



Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W19.7×H11.1mm 98.43"×0.78"×0.43"	
Diffuser	L2500×W19.7×H10.6mm 98.43"×0.78"×0.42"	
Holeless end caps	EC-LS1911K L19.7×W19.7×H5mm 0.78"×0.78"×0.20"	
End cap with hole	EC-LS1911K L19.7×W19.7×H5mm 0.78"×0.78"×0.20"	


Installation Accessories		
Ceiling clip	CP-07 38×15×4.5mm 1.50"×0.59"×0.18"	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	

Standard extenders		
180°/ "L"-type / "7"-type "T"-type / "X"-type	EX-E1 / EX-E2 / EX-E3 / EX-E4 / EX-E5	


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/ m 4.6W/ ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

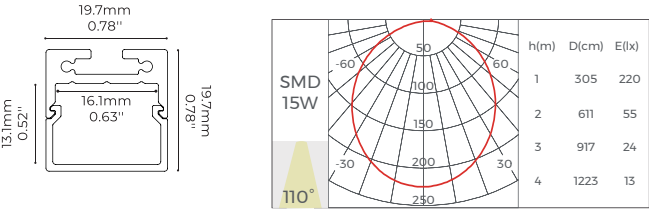


Structure image

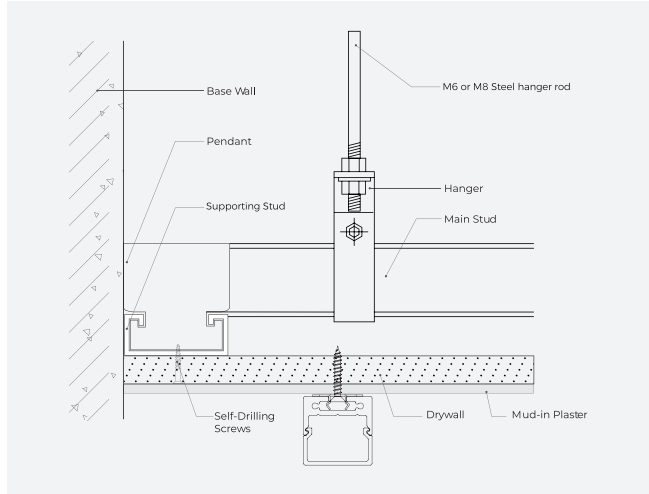

Effect image

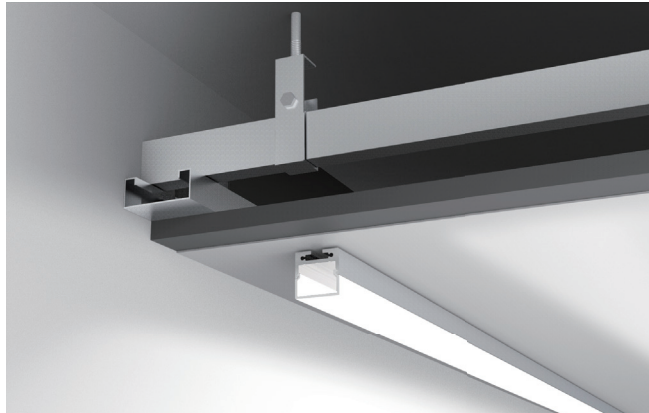

LS2013

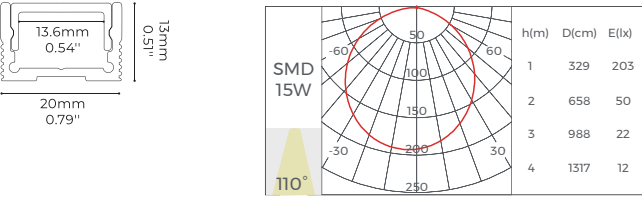

Basic Parameters	
Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500×W20×H13mm 98.43"×0.79"×0.51"
Diffuser	L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
White Prismatic	CV-LR2013 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
Black Prismatic	CV-LR2013 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
Holeless end caps	EC-LS2013 L20×W13×H4.5mm 0.79"×0.51"×0.18"
End cap with hole	EC-LS2013 L20×W13×H4.5mm 0.79"×0.51"×0.18"


Installation Accessories	
Ceiling clip	CP-08 21.8X12X6.4mm 0.86"×0.47"×0.25"

Light Source


Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/ m 4.6W/ ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"



LS2020

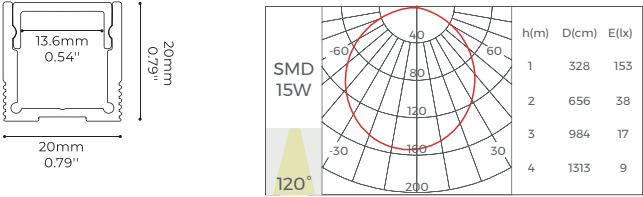

Basic Parameters	
Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500×W20×H20mm 98.43"×0.79"×0.79"
Diffuser	L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
Prismutic Diffuser	CV-LR2013 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
Black Diffuser	CV-LR2013 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"
Holeless end caps	EC-LS2020 L20×W20×H4.5mm 0.79"×0.79"×0.18"
End cap with hole	EC-LS2020 L20×W20×H4.5mm 0.79"×0.79"×0.18"


Installation Accessories	
Ceiling clip	CP-08 21.8X12X6.4mm 0.86"×0.47"×0.25"

Light Source


Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/ m 4.6W/ ft	5000X8X 1.3mm 196.85"X0.31"x 0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"



LS2522

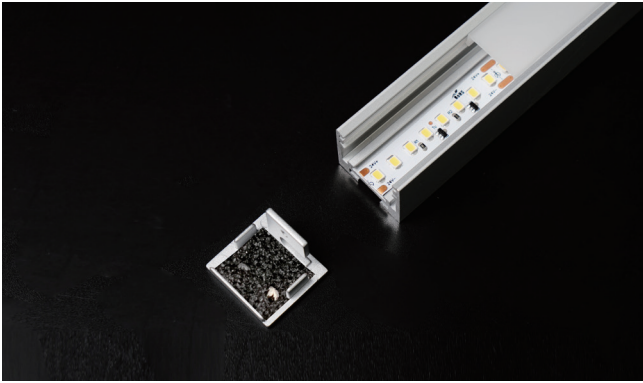

Profile Components	
Profile	L2500"×W25"×H22.5mm 98.43"×0.98"×0.89"
Diffuser	L2500"×W20.4"×H6.7mm 98.43"×0.80"×0.26"
Holeless end caps	EC-LS25 L25.1"×W22.5"×H16.5mm 0.99"×0.89"×0.65"

Installation Accessories	
Whole luminaire splicing bars	EX-29 105"×23"×8.1mm 4.13"×0.91"×0.32"
Splicing bars	EX-31 100"×15.5"×2mm 3.94"×0.61"×0.08"

Pendant Accessory	PE-I
Pendant Accessory	PE-J


Ceiling Accessory	CL-16 64.5"×24.5"×5mm 2.54"×0.96"×0.20"
Power box 100w Non dimming	PB-02 574"×25"×50mm 22.60"×0.98"×1.97"
Power box 100w 1-10v dimming	PB-04 574"×35"×60mm 22.60"×1.38"×2.36"

Light Source


Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/ M 2280LM/ M 884LM/ft 695LM/ft	24V	20W/ M 6.1W/ ft	5000x10x1.6mm 196.85"x0.39"x0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DY830-24V-14mm	>80 >90	2400LM/ M 2060LM/ M 732LM/ft 628LM/ft	24V	20W/ M 6.1W/ ft	538.5x13.5x1.2mm 21.20"x0.53"x0.05"	30LEDs/ PCS	6LEDs/ 1077mm 6LEDs/ 4.24"



Basic Parameters	
Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


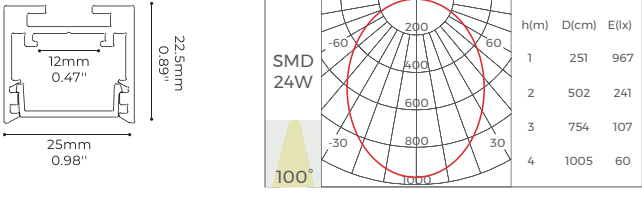


Cover Accessories	
Prismatic Diffuser	CV-LS25FP L2500"×W20.4"×H6.7mm 98.43"×0.80"×0.26"
Grating	CV-LS25G L1077"×W19.5"×H15mm 4.24"×0.77"×0.59"
Asymmetric	CV-LS25LA L2500"×W22"×H7.5mm 98.43"×0.87"×0.30"
Blind	CV-LS25FB L2500"×W20.4"×H6.7mm 98.43"×0.80"×0.26"

Corner Accessories	
L-shaped	L90-LS25 277X277X22mm 10.91"×10.91"×0.87"
T-shaped	T90-LS25 529X277X22mm 20.83"×10.91"×0.87"
X-shaped	X90-LS25 529X529X22mm 20.83"×20.83"×0.87"

* All corners are available in with/without light source.

LS3535

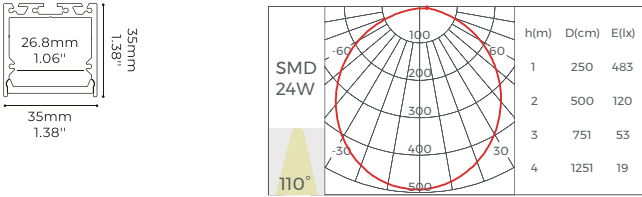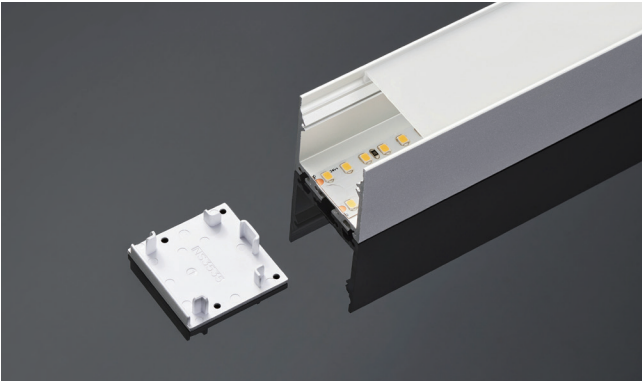

Basic Parameters

Installation	Ceiling, Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500XW35XH35mm 98.43"x1.38"x1.38"	
Diffuser	L2500XW32.8XH5.1mm 98.43"x1.29"x0.20"	
Holeless end caps	EC-LS3535 L35XW35XH9mm 1.38"x1.38"x0.35"	

Installation Accessories


Ceiling clip	CP-15 L24.6XW20XH6.2mm 0.97"x0.79"x0.24"	
Pendant Cable (with junction box)	PY-D	
Pendant Cable	PN-D	
Splicing Bar	EX-09 L1000XW13.32XH2.65mm 39.37"x0.52"x0.10"	

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/ M 2000LM/ M 792LM/ft 610LM/ft	24V	20W/ M 6.1W/ ft	2500x20x 1.5mm 98.43"x0.79"x 0.06"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"



LS5050

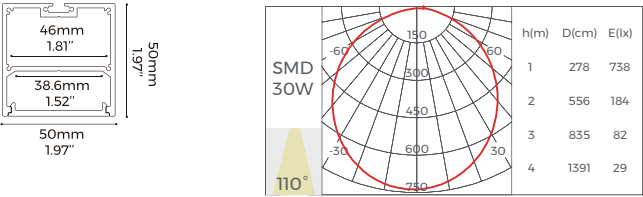

Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW50XH50mm 98.43"x1.97"x1.97"	
Diffuser	L2500XW44.7XH6.1mm 98.43"x1.75"x0.24"	
Holeless end caps	EC-LS5050(N) L50XW50XH12mm 1.97"x1.97"x0.47"	

Installation Accessories


Pendant Cable (with junction box)	PY-D	
Pendant Cable	PN-D	
Pendant Rod	PG-I	
Splicing Bar	EX-11 L400XW45.6XH21.4mm 15.75"x1.80"x0.84"	

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/ m 2500LM/ m 960LM/ft 762LM/ft	24V	25W/ M 7.6W/ ft	2500X34X 1.5mm 98.43"x1.34"x 0.06"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

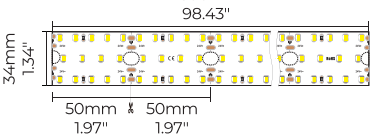

LH25100

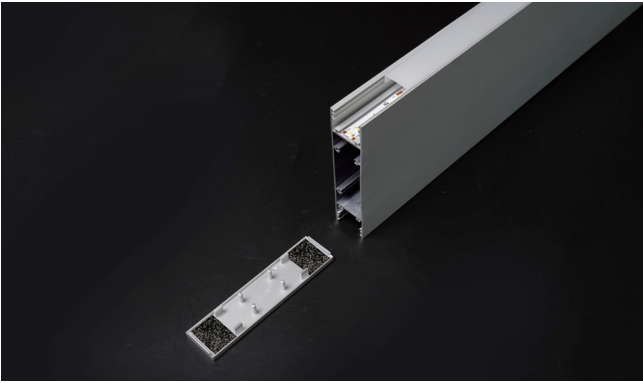


Profile Components		
Profile	L2500*W25*H100mm 98.43"x0.98"x3.94"	
Diffuser	L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"	
Holeless end caps	EC-LH25 L100*W20*H10.5mm 3.97"x0.79"x0.41"	

Installation Accessories

Splicing bars	EX-30 80*22*15mm 3.15"x0.87"x0.59"	
Pendant Accessory	PE-H	
Pendant Accessory	PE-G	
Power box 100w Non dimming	PB-02 574*25*50mm 22.60"x0.98"x1.97"	
Power box 100w 1-10v dimming	PB-04 574*35*60mm 22.60"x1.38"x2.36"	


Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/ M 2280LM/ M 884LM/ft 695LM/ft	24V	20W/ M 6.1W/ ft	5000x10x 1.6mm 196.85"x0.39"x 0.06"	160LEDs	8LEDs/ 50mm 8LEDs/ 1.97"
DY830-24V-14mm	>80 >90	2400LM/ M 2060LM/ M 732LM/ft 628LM/ft	24V	20W/ M 6.1W/ ft	538.5x13.5x 1.2mm 21.20"x0.53"x 0.05"	30LEDs/ PCS	6LEDs/ 107.7mm 8LEDs/ 4.24"



Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

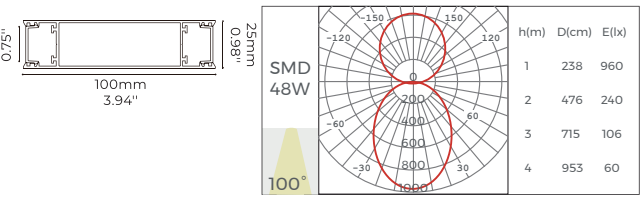

Cover Accessories



Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"	
Grating	CV-LS25G L1077*W19.5*H15mm 4.24"x0.77"x0.59"	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm 98.43"x0.87"x0.30"	
Blind	CV-LS25FB L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"	

Corner Accessories

L-shaped	L90-LH25 277X277X100mm 10.91"x10.91"x3.94"	
T-shaped	T90-LH25 529X277X100mm 20.83"x10.91"x3.94"	
X-shaped	X90-LH25 529X529X100mm 20.83"x20.83"x3.94"	

* All corners are available in with/without light source.

LT30

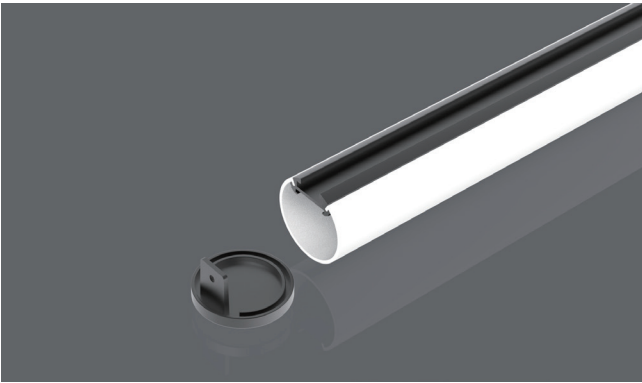

Basic Parameters	
Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White




Profile Components	
Profile	L2500XW19.5XH7.4mm 98.43"x0.77"x0.29"
Diffuser	L2500XΦ30XH26.8mm 98.43"xΦ0.77"x1.06"
Holeless end caps	EC-LT30 Φ32.5XH2.4mm Φ1.28"x0.09"

Installation Accessories	
Pendant cable (Wire and cable in one)	PE-A
Pendant Cable	PN-Y

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M 567LM/ft	24V	16.2W/M 4.9W/ft	5000x10x16mm 196.85"x0.39"x0.06"	168LEDs	7LEDs/ 42mm 7LEDs/ 1.65"



LT60

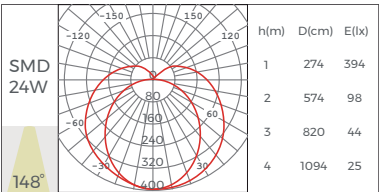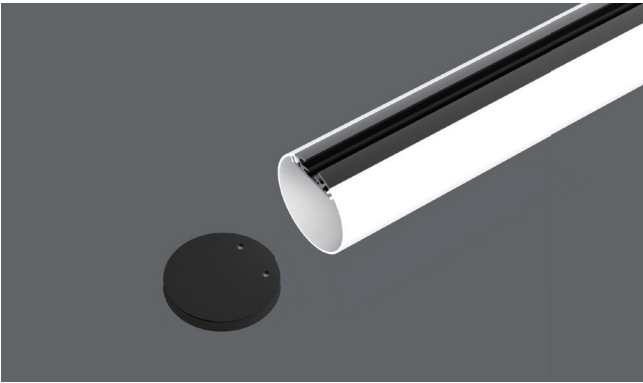

Basic Parameters	
Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500XW35.2XH11mm 98.43"x1.39"x0.43"
Diffuser	L2500XΦ60XH55.6mm 98.43"xΦ2.36"x2.19"
Holeless end caps	EC-LT60 Φ63.4xH8mm Φ2.5"x0.31"




Installation Accessories	
Pendant cable (with junction box)	PY-D
Pendant cable	PN-D

180° extender	EX-09 L1000XW13.3XH2.6mm 39.37"x0.52"x0.10"
---------------	---

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M 792LM/ft 610LM/ft	24V	20W/M 6.1W/ft	2500x20x15mm 98.43"x0.79"x0.06"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"



LE1212

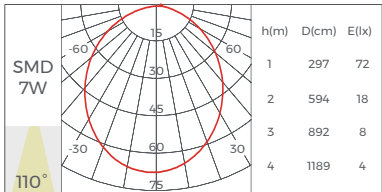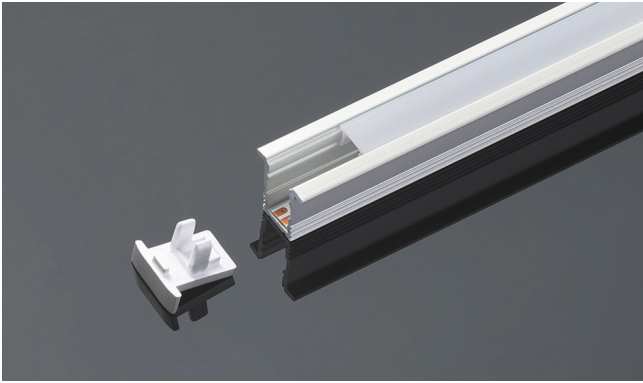


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White




Profile Components	
Profile	L2500XW12XH12mm 98.43"x0.47"x0.47"
Diffuser	L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
Black Diffuser	CV-LR0812 L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
Holeless end caps	EC-LE1212 L12XW12XH10mm 0.47"x0.47"x0.39"
End cap with hole	EC-LE1212 L12XW12XH10mm 0.47"x0.47"x0.39"

Installation Accessories	
Embedded clip	CP-11 25X13X9.5mm 0.98"x0.51"x0.37"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X4X1.2mm 196.85"x0.16"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LE1410

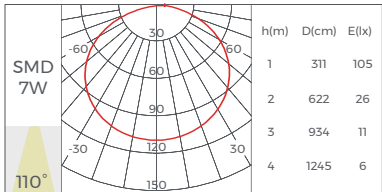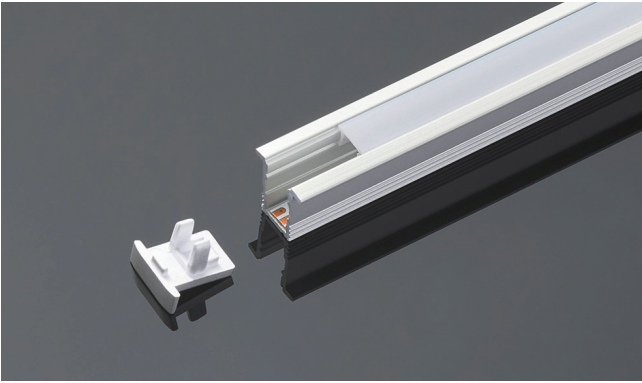


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White



Profile Components	
Profile	L2500XW14XH10mm 98.43"x0.55"x0.39"
Diffuser	L2500XW9.43XH3.06mm 98.43"x0.37"x0.12"
Black Prismatic	CV-LS1010 L2500XW9.43XH3.06mm 98.43"x0.37"x0.12"
Holeless end caps	EC-LE1410 L14XW10XH8mm 0.55"x0.39"x0.31"
End cap with hole	EC-LE1410 L14XW10XH8mm 0.55"x0.39"x0.31"

Installation Accessories	
Embedded Clips	CP-38 L15.3XW24XH8mm 0.60"x0.94"x0.31"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



LE1910

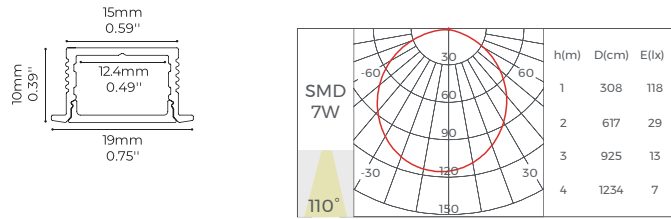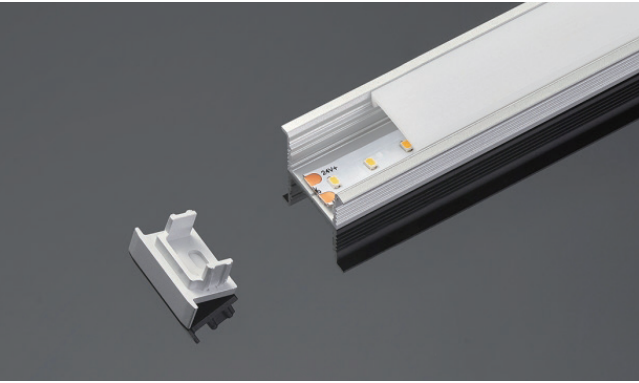

Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500xW19xH10mm 98.43"x0.75"x0.39"
Diffuser	L2500xW14.43xH3mm 98.43"x0.57"x0.12"
Black Diffuser	CV-LS1510 L2500xW14.43xH3mm 98.43"x0.57"x0.12"
Holeless end caps	EC-LE1910 L19xW10xH8mm 0.75"x0.39"x0.31"
End cap with hole	EC-LE1910 L19xW10xH8mm 0.75"x0.39"x0.31"

Installation Accessories	
Embedded clip	CP-39 L24xW20.79xH8.5mm 0.94"x0.82"x0.33"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"


8mm
0.31"

24V+

24V-

<

LE2409

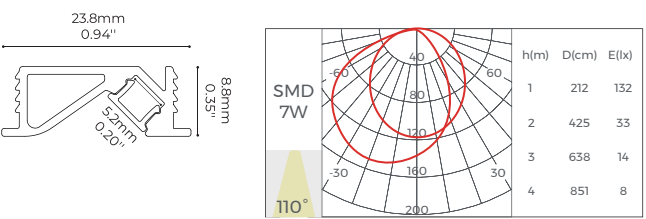



Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500XW23.8XH8.8mm 98.43"x0.94"x0.35"
Diffuser	CV-LR0812 L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
Black Diffuser	CV-LR0812 L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
End cap	EC-LE2409 L23.8XW8.8XH14mm 0.94"x0.35"x0.55"
End cap with hole	EC-LE2409 L23.8XW8.8XH14mm 0.94"x0.35"x0.55"



Light Source

Flexible Strip



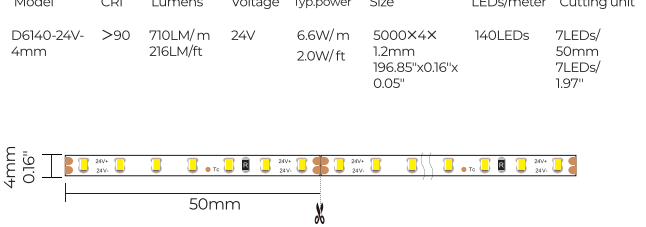

LE2507

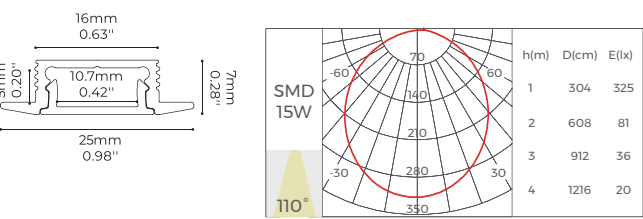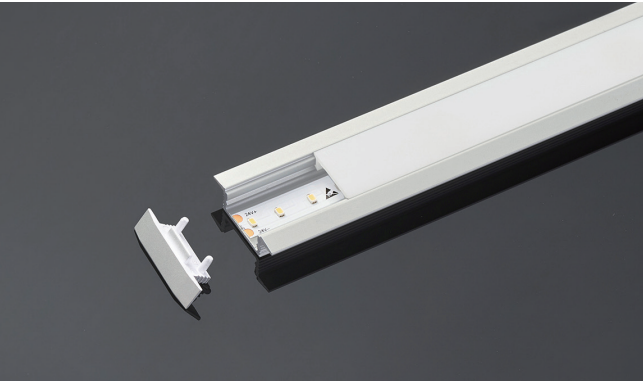

Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components	
Profile	L2500XW25XH7mm 98.43"x0.98"x0.28"
Diffuser	L2500XW14.6XH4.5mm 98.43"x0.57"x0.18"
White Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"
Black Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"
Holeless end caps	EC-LE2507 L25XW7XH10mm 0.98"x0.28"x0.39"
End cap with hole	EC-LE2507 L25XW7XH10mm 0.98"x0.28"x0.39"

Light Source



Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m 503LM/ft	24V	15W/ m 4.6W/ ft	5000X8X 1.3mm 196.85"x0.31"x 0.05"	280LEDs	7LEDs/ 25mm 7LEDs/ 0.98"

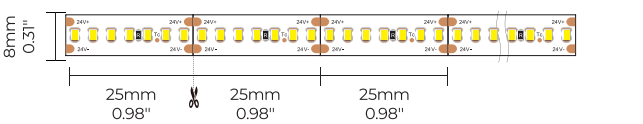

LE2513

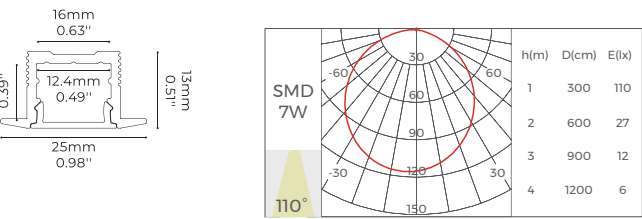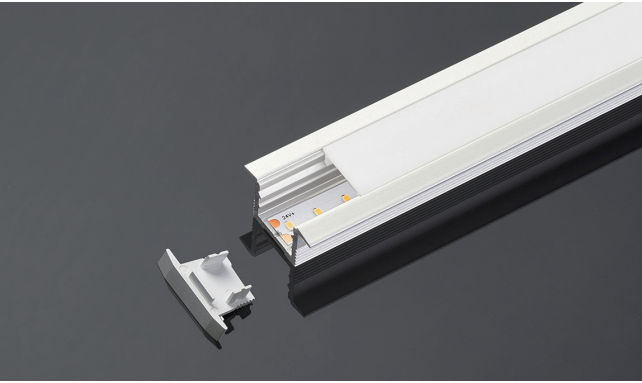


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500XW25XH13mm 98.43"x0.98"x0.51"
Diffuser	L2500XW14.7XH4.5mm 98.43"x0.58"x0.18"
White Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"
Black Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"
Holeless end caps	EC-LE2513 L25XW13XH11mm 0.98"x0.51"x0.43"
End cap with hole	EC-LE2513 L25XW13XH11mm 0.98"x0.51"x0.43"

Installation Accessories	
Embedded clip	CP-12 21.79X20X11mm 0.86"x0.79"x0.43"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m 216LM/ft	24V	6.6W/ m 2.0W/ ft	5000×8× 1.2mm 196.85"×0.31" ×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

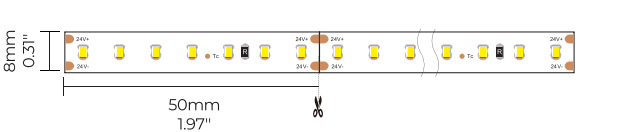

LE3523



Profile Components	
Profile	L2500×W35×H23mm 98.43"x1.38"x0.91"
Diffuser	L2500×W20.4×H6.7mm 98.43"x0.80"x0.26"
Holeless end caps	EC-LE25 L35×W23×H21.5mm 1.38"x0.91"x0.85"


Installation Accessories	
Splicing bars	EX-31 100×15.5×2mm 3.94"x0.61"x0.08"
Recessed Accessory	RE-14 24×16.3×15mm 0.94"x0.64"x0.59"

Light Source


Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DS8160(A)-24V-10mm	>80	2900LM/ M	24V	20W/ M	5000x10x1.6mm	160LEDs	8LEDs/ 50mm
	>90	2280LM/ M		6.1W/ ft	196.85"x0.39"x0.06"		8LEDs/ 1.97"
DY830-24V-14mm	>80	2400LM/ M	24V	20W/ M	538.5x13.5x1.2mm	30LEDs/ PCS	6LEDs/ 107.7mm
	>90	2060LM/ M		6.1W/ ft	21.20"x0.53"x0.05"		8LEDs/ 4.24"



Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

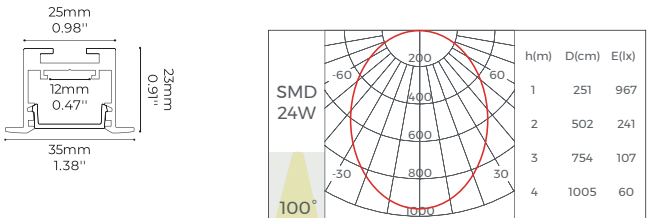


Cover Accessories	
Prismatic Diffuser	CV-LS25FP L2500×W20.4×H6.7mm 98.43"x0.80"x0.26"
Grating	CV-LS25G L107.7×W19.5×H15mm 4.24"x0.77"x0.59"
Asymmetric	CV-LS25LA L2500×W22×H7.5mm 98.43"x0.87"x0.30"
Blind	CV-LS25FB L2500×W20.4×H6.7mm 98.43"x0.80"x0.26"

Corner Accessories	
L-shaped	L90-LE25 277X277X23mm 10.91"x10.91"x0.91"
T-shaped	T90-LE25 529X277X23mm 20.86"x10.91"x0.91"
X-shaped	X90-LE25 529X529X23mm 10.91"x20.86"x0.91"

* All corners are available in with/without light source.

LR0812

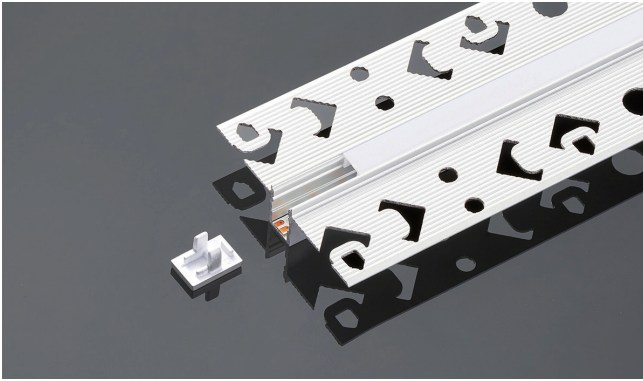


Profile Components	
Profile	L2500×W47.8×H12mm 98.43"x1.88"x0.47"
Diffuser	L2500×W6.4×H3.7mm 98.43"x0.25"x0.15"
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm 98.43"x0.25"x0.15"
Holeless end caps	EC-LR0812 L8×W7.8×H12mm 0.31"x0.31"x0.47"
End cap with hole	EC-LR0812 L8×W7.8×H12mm

Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"x1.57"


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m 216LM/ft	24V	6.6W/ m 2.0W/ ft	5000X4X 1.2mm 196.85"x0.16"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

4mm
0.16"


</



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

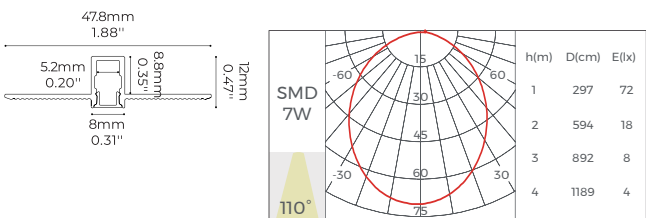


Structure image

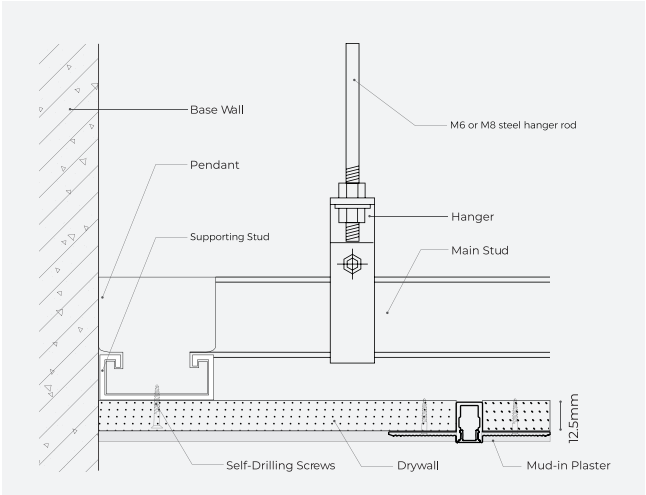

Effect image



LR1613

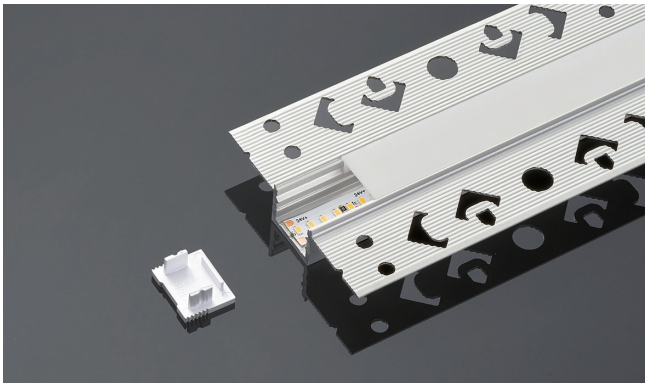



Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500XW56XH13mm 98.43"x2.20"x0.51"	
Diffuser	L2500XW14.7XH4.5mm 98.43"x0.58"x0.18"	
White Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Black Prismatic	CV-LR1613 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Holeless end caps	EC-LR1613 L7XW16XH13mm 0.28"x0.63"x0.51"	
End cap with hole	EC-LR1613 L7XW16XH13mm 0.28"x0.63"x0.51"	

Installation Accessories	
Screw	CL-01 M3.5X40mm M0.14"x1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs 7LEDs/50mm 7LEDs/1.97"	

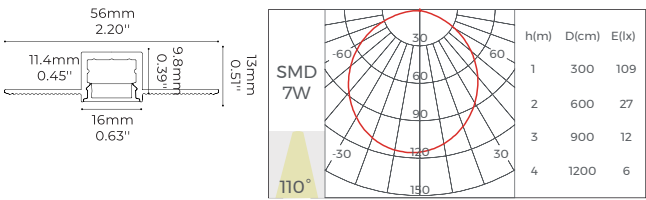

Structure image

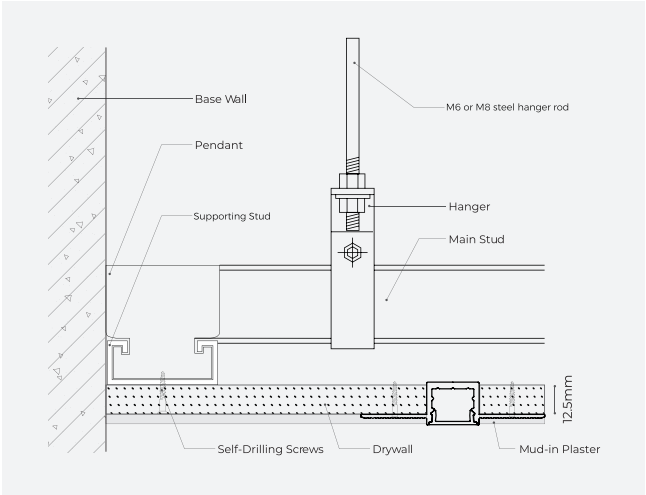

Effect image



LR2013





Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500XW60XH13mm 98.43"x2.36"x0.51"	
Diffuser	L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
White Prismatic	CV-LR2013 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Black Prismatic	CV-LR2013 L2500XW14.7XH4.3mm 98.43"x0.58"x0.17"	
Holeless end caps	EC-LR2013 L20XW13XH4.5mm 0.79"x0.51"x0.18"	
End cap with hole	EC-LR2013 L20XW13XH4.5mm 0.79"x0.51"x0.18"	

Installation Accessories	
Screw	CL-01 M3.5X40mm M0.14"x1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/m 4.6W/ft	5000X8X1.3mm 196.85"x0.31"x0.05"	280LEDs 14LEDs/50mm 14LEDs/1.97"	

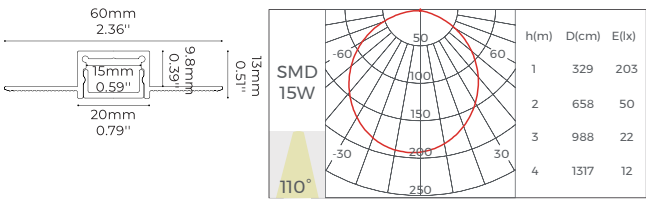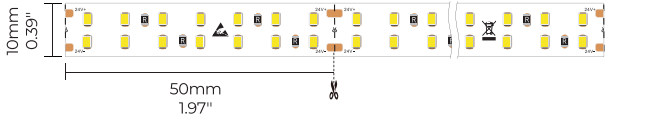


Structure image

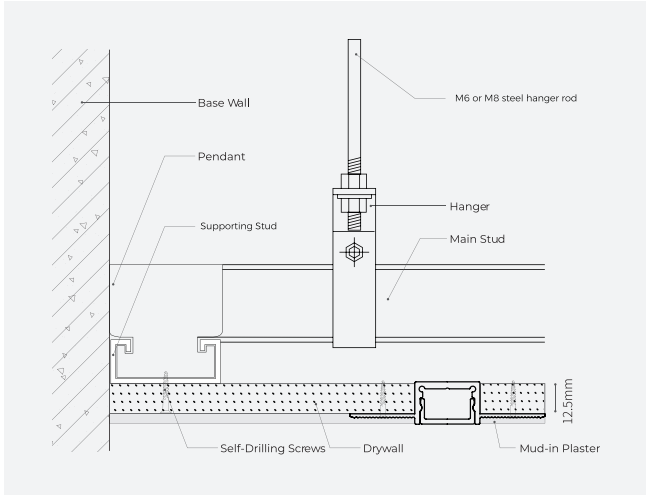

Effect image




LR2522

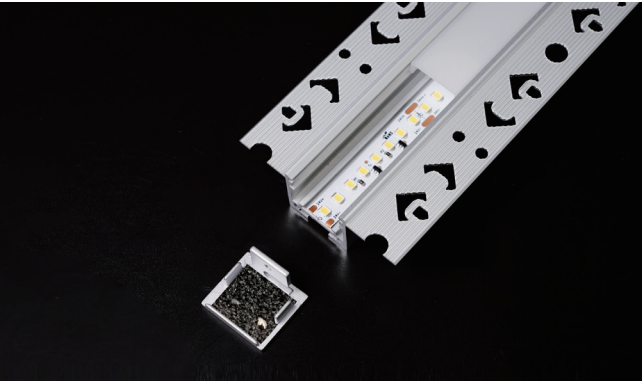


Profile Components	
Profile	L2500*W65*H22.5mm 98.43"x2.56"x0.89"
Diffuser	L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"
Holeless end caps	EC-LS25 L251*W22.5*H16.5mm 0.99"x0.89"x0.65"

Installation Accessories	
Screw	CL-01 M3.5x40mm M0.14"x1.57"
Splicing bars	EX-31 100*15.5*2mm 3.94"x0.61"x0.08"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DS8160(A)-24V-10mm	>80	2900LM/ M	24V	20W/ M	5000x10x1.6mm 196.85"x0.39"x0.06"	160LEDs	8LEDs/ 50mm
	>90	2280LM/ M 884LM/ft 695LM/ft		6.1W/ ft			8LEDs/ 1.97"
DY830-24V-14mm	>80	2400LM/ M	24V	20W/ M	538.5x13.5x1.2mm 21.20"x0.53"x0.05"	30LEDs/ PCS	6LEDs/ 42mm
	>90	2060LM/ M 732LM/ft 628LM/ft		6.1W/ ft			8LEDs/ 4.24"



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

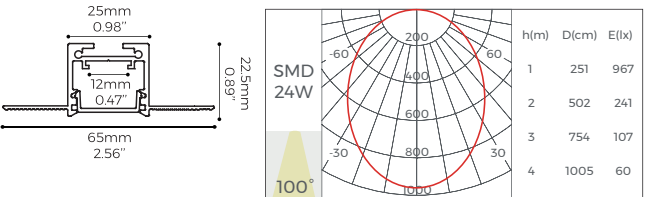


Cover Accessories	
Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"
Grating	CV-LS25G L1077*W19.5*H15mm 4.24"x0.77"x0.59"
Asymmetric	CV-LS25LA L2500*W22*H7.5mm 98.43"x0.87"x0.30"
Blind	CV-LS25FB L2500*W20.4*H6.7mm 98.43"x0.80"x0.26"

Corner Accessories	
L-shaped	L90-LR25 277X277X22.5mm 10.91"x10.91"x0.89"
T-shaped	T90-LR25 529X277X22.5mm 20.83"x10.91"x0.89"
X-shaped	X90-LR25 529X529X22.5mm 20.83"x20.83"x0.89"

* All corners are available in with/without light source.

LR3735

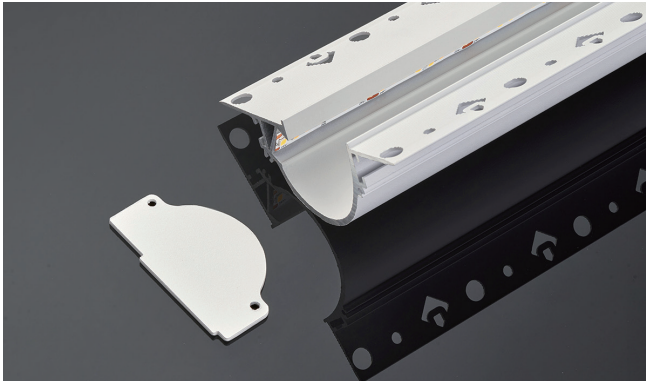

Profile Components	
Profile	L2500XW99XH35mm 98.43"x3.90"x1.38"
Holeless end caps	EC-LR3735 L59.8XW35XH2mm 2.35"x1.38"x0.08"


Installation Accessories	
Screw	CL-01 M3.5x40mm M0.14"x1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit


D8168-24V-10mm	>90	1860LM/ M 567LM/ft	24V	16.2W/ M 4.9W/ ft	5000x10x1.6mm 196.85"x0.39"x0.06"	168LEDs	7LEDs/ 42mm 7LEDs/ 1.65"



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

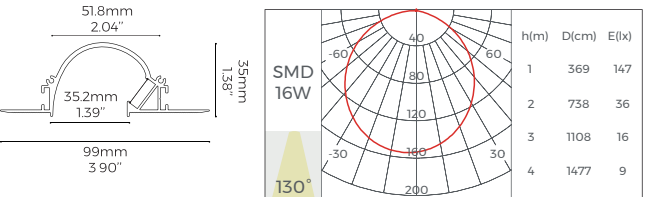


Structure image

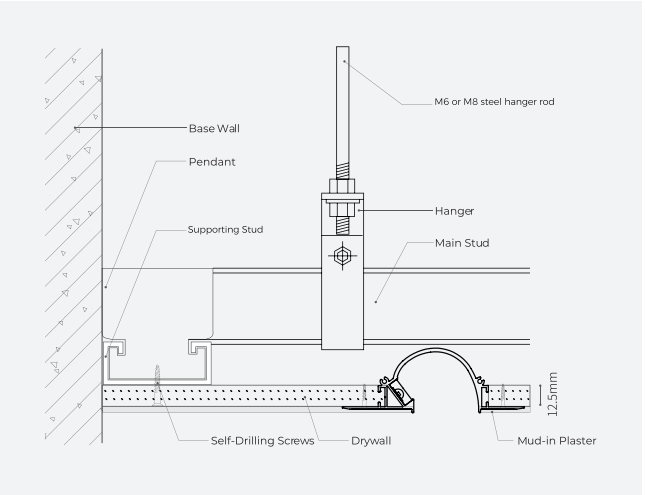

Effect image



LR3924

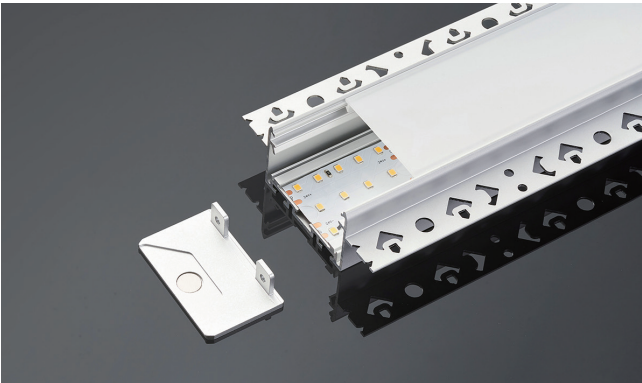

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components



Profile	L2500XW85XH24mm 98.43"x3.35"x0.94"	
Diffuser	L2500XW34.2XH10.2mm 98.43"x1.35"x0.40"	
Holeless end caps	EC-LR3924 L38.6XW24XH2mm 1.52"x0.94"x0.08"	

Installation Accessories


Screw	CL-01 M3.5X40mm M0.14"x1.57"	
-------	------------------------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M 792LM/ft 610LM/ft	24V	20W/M 6.1W/ft	2500x20x1.5mm 98.43"x0.79"x0.06"	280LEDs	14LEDs/50mm 14LEDs/1.97"

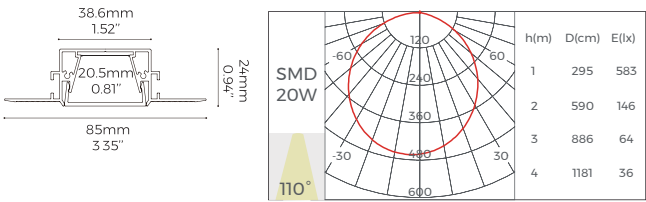


Structure image

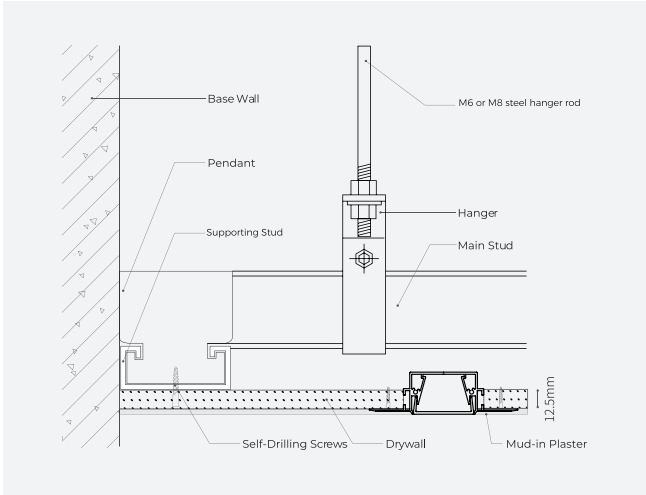

Effect image



LR5535(A)

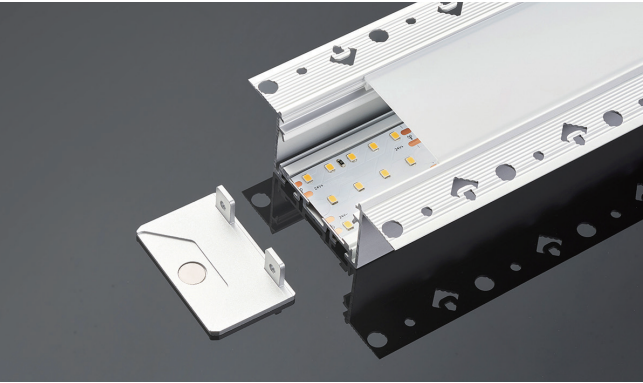

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500XW95XH35mm 98.43"x3.74"x1.38"	
Diffuser	L2500XW48.8XH5.6mm 98.43"x1.92"x0.22"	
Flexible diffuser	CV-LS5470FD(F) L50000XW48.8XH5.6mm 196.86"x1.92"x0.22"	
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000XW48.8XH5.6mm 196.86"x1.92"x0.22"	
Holeless end caps	EC-LR5535(A) L55XW35XH22mm 2.17"x1.38"x0.87"	

Installation Accessories



Screw	CL-01 M3.5X40mm M0.14"x1.57"	
-------	------------------------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m 960LM/ft 762LM/ft	24V	25W/m 7.6W/ft	2500X34X1.5mm 98.43"x1.34"x0.06"	280LEDs	14LEDs/50mm 14LEDs/1.97"
D8560SWW-24V-34mm	>80	2740LM/m 835LM/ft	24V	50W/m 15.2W/ft	2500X34X1.5mm 98.43"x1.34"x0.06"	560LEDs	28LEDs/50mm 28LEDs/1.97"

Rigid module

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m 960LM/ft 762LM/ft	24V	25W/m 7.6W/ft	499X36X5.6mm 19.65"x1.42"x0.22"	280LEDs	14 LEDs/50mm 14LEDs/1.97"
DY8560SWW-24V-36mm	>80	2740LM/m 835LM/ft	24V	50W/m 15.2W/ft	499X36X5.6mm 19.65"x1.42"x0.22"	560LEDs	28LEDs/50mm 28LEDs/1.97"

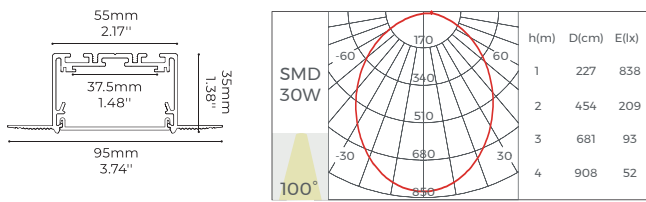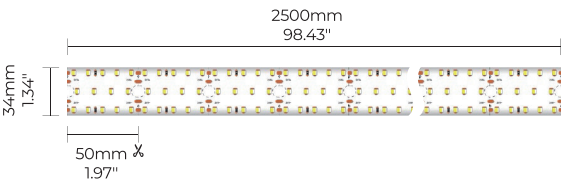

Splicing Accessories


180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	

Splicing bar	EX-I7 50X9X22.5mm 1.96"x0.35"x0.89"	
--------------	---	--

Corners

"L"-type	L90-LR5535(A) 107X107X35mm 4.21"x4.21"x1.38"	
"L"-type(inward)	L90N-LR5535(A) 100X100X95mm 3.94"x3.94"x3.74"	
"L"-type (outward)	L90W-LR5535(A) 100X100X95mm 3.94"x3.94"x3.74"	
"T"-type	T90-LR5535(A) 150X107X35mm 5.91"x4.21"x1.38"	
"X"-type	X90-LR5535(A) 150X150X35mm 5.91"x5.91"x1.38"	

LR5535(B)

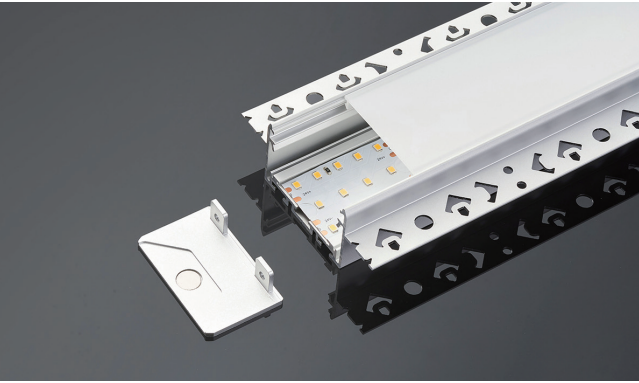


Profile Components	
Profile	L2500XW95XH35mm 98.43"x3.66"x1.38"
Diffuser	L2500XW48.8XH5.6mm 98.43"x1.92"x0.22"
Flexible diffuser	CV-LS5470FD(F) L50000XW48.8XH5.6mm 196.86"x1.92"x0.22"
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000XW48.8XH5.6mm 196.86"x1.92"x0.22"
Holeless end caps	EC-LR5535(A) L55XW35XH22mm 2.17"x1.38"x0.87"


Installation Accessories	
Screw	CL-01 M3.5X40mm M0.14"x1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m 960LM/ft 762LM/ft	24V	25W/m 7.6W/ft	2500X34X 1.5mm 98.43"x1.34"x 0.06"	280LEDs 50mm 14LEDs/ 1.97"	14LEDs/ 50mm 14LEDs/ 1.97"
D8560SWW-24V-34mm	>80	2740LM/m 835LM/ft	24V	50W/m 15.2W/ft	2500X34X 1.5mm 98.43"x1.34"x 0.06"	560LEDs 50mm 28LEDs/ 1.97"	28LEDs/ 50mm 28LEDs/ 1.97"

Rigid module							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m 960LM/ft 762LM/ft	24V	25W/m 7.6W/ft	499X36X 5.6mm 19.65"x1.42"x 0.22"	280LEDs 50mm 14LEDs/ 1.97"	14LEDs/ 50mm 14LEDs/ 1.97"
DY8560SWW-24V-36mm	>80	2740LM/m 835LM/ft	24V	50W/m 15.2W/ft	499X36X 5.6mm 19.65"x1.42"x 0.22"	560LEDs 50mm 28LEDs/ 1.97"	28LEDs/ 50mm 28LEDs/ 1.97"

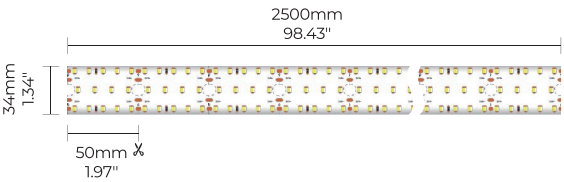


Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

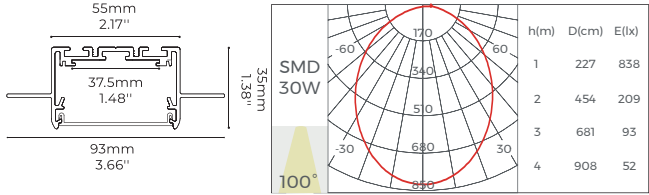

Splicing Accessories				
180°extender	EX-E1		"Y"-type (120°)	EX-E9
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6
Splicing bar	EX-17 50X9X22.5mm 1.96"x0.35"x0.89"			

Corners		
"L"-type	L90-LR5535(B) 107X107X35mm 4.21"x4.21"x1.38"	
"L"-type(inward)	L90N-LR5535(B) 100X100X93mm 3.94"x3.94"x3.66"	
"L"-type (outward)	L90W-LR5535(B) 100X100X93mm 3.94"x3.94"x3.66"	
"T"-type	T90-LR5535(B) 150X107X35mm 5.91"x4.21"x1.38"	
"X"-type	X90-LR5535(B) 150X150X35mm 5.91"x5.91"x1.38"	

LG2323

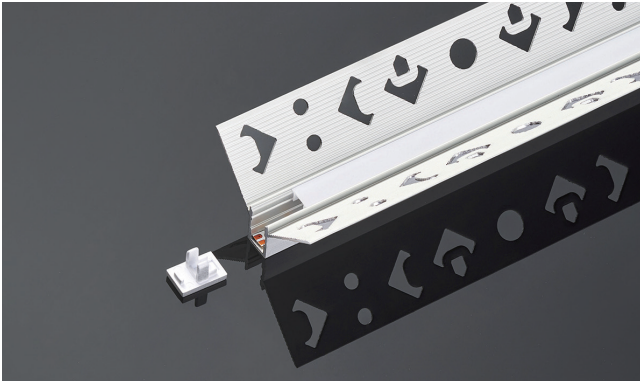


Profile Components	
Profile	L2500XW40.3XH24.3mm 98.43"x1.59"x0.96"
Diffuser	L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
Black Diffuser	CV-LR0812 L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"
Holeless end caps	EC-LG2323 L8XW7.8XH12mm 0.31"x0.31"x0.47"
End cap with hole	EC-LG2323 L8XW7.8XH12mm 0.31"x0.31"x0.47"


Installation Accessories	
Screw	CL-01 M3.5X40mm M0.14"x1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X4X 1.2mm 196.85"x0.16"x 0.05"	140LEDs 50mm 7LEDs/ 1.97"	7LEDs/ 50mm 7LEDs/ 1.97"

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

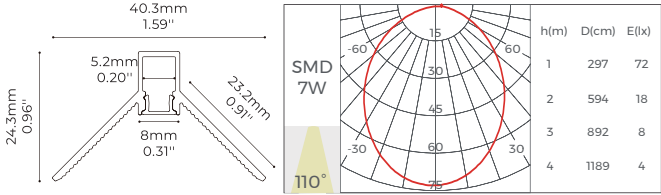


Structure image

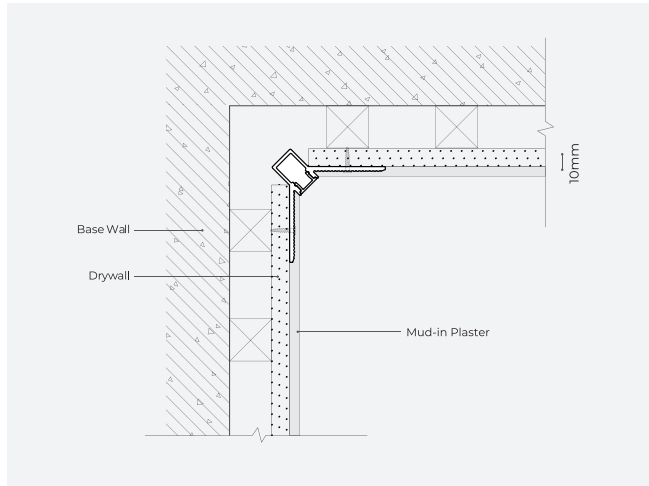

Effect image



LG2727

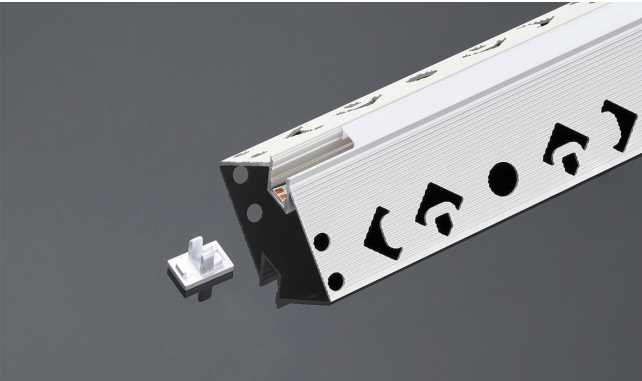



Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500XW44.9XH22.2mm 98.43"x1.77"x0.87"	
Diffuser	L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"	
Black Diffuser	CV-LR0812 L2500XW6.4XH3.7mm 98.43"x0.25"x0.15"	
Holeless end caps	EC-LG2727 L8XW7.8XH12mm 0.31"x0.31"x0.47"	
End cap with hole	EC-LG2727 L8XW7.8XH12mm 0.31"x0.31"x0.47"	

Installation Accessories	
Screw	CL-01 M3.5X40mm M0.14"x1.57"


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000X4X1.2mm 196.85"x0.16"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

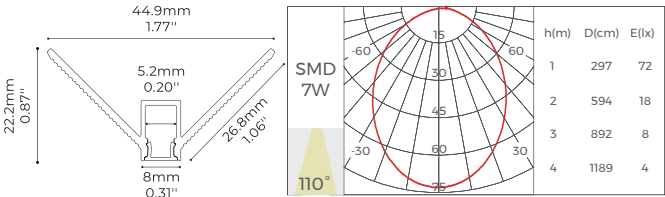

Structure image

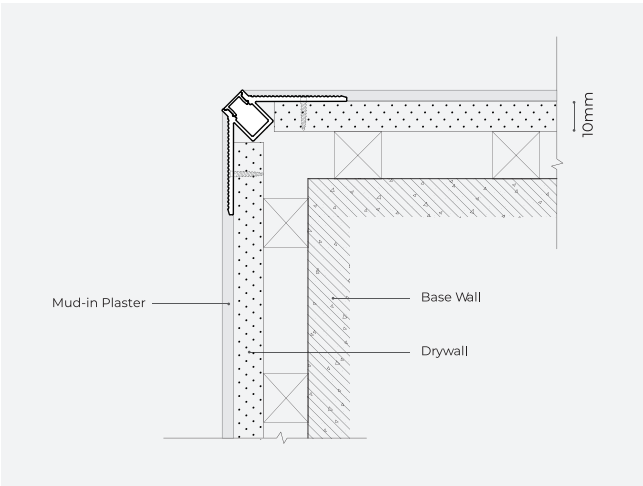

Effect image

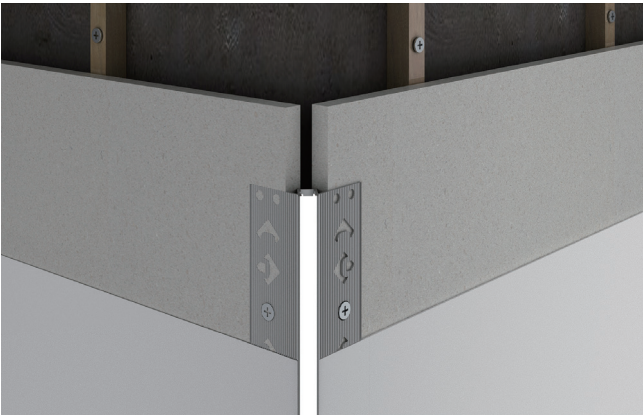

LG1616C(N)





Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500XW16XH16mm 98.43"x0.63"x0.63"	
Diffuser	L2500XW19.4XH6mm 98.43"x0.76"x0.24"	
Holeless end caps	EC-LG1616C(N) L16XW16XH6.5mm 0.63"x0.63"x0.26"	
End cap with hole	EC-LG1616C(N) L16XW16XH6.5mm 0.63"x0.63"x0.26"	

Installation Accessories	
Ceiling clip	CP-13 15X17X17mm 0.59"x0.67"x0.67"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

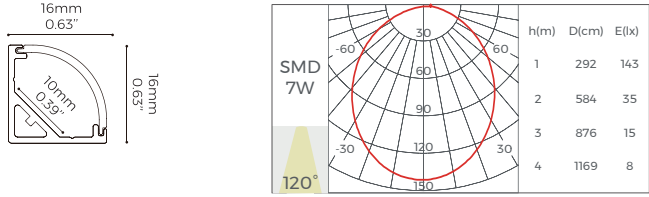

Structure image

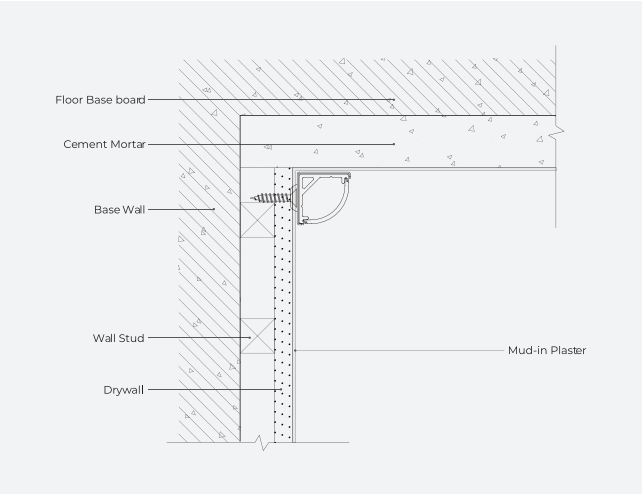

Effect image



LG1616K(N)





Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components	
Profile	L2500XW16XH16mm 98.43"x0.63"x0.63"
Diffuser	L2500XW14.6XH14.6mm 98.43"x0.57"x0.57"
Holeless end caps	EC-LG1616K(N) L16XW16XH6.5mm 0.63"x0.63"x0.26"
End cap with hole	EC-LG1616K(N) L16XW16XH6.5mm 0.63"x0.63"x0.26"

Installation Accessories	
Ceiling clip	CP-13 15X17X17mm 0.59"x0.67"x0.67"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

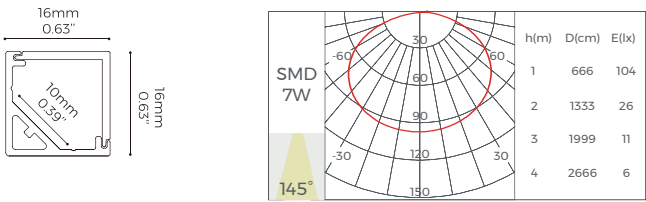

Structure image

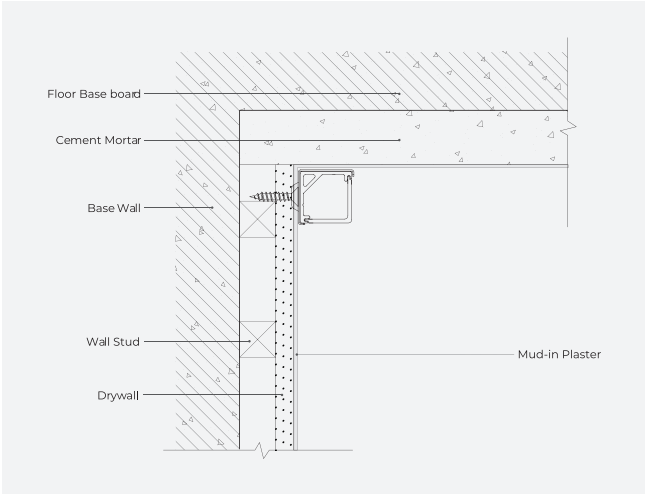

Effect image



LG2020C





Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components	
Profile	L2500XW20XH20mm 98.43"x0.79"x0.79"
Diffuser	L2500XW25.4XH17.7mm 98.43"x1.00"x0.30"
Holeless end caps	EC-LG2020C L20XW20XH6.5mm 0.79"x0.79"x0.26"
End cap with hole	EC-LG2020C L20XW20XH6.5mm 0.79"x0.79"x0.26"

Installation Accessories	
Ceiling clip	CP-50 L211XW211XH15mm 0.83"x0.83"x0.59"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/m 4.6W/ft	5000X8X1.3mm 196.85"x0.31"x0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

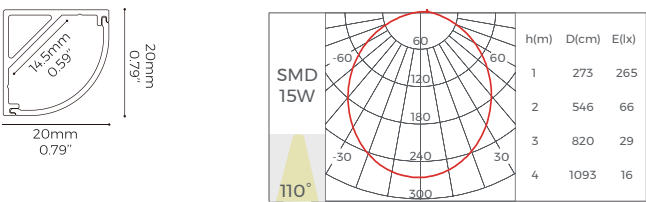


Structure image

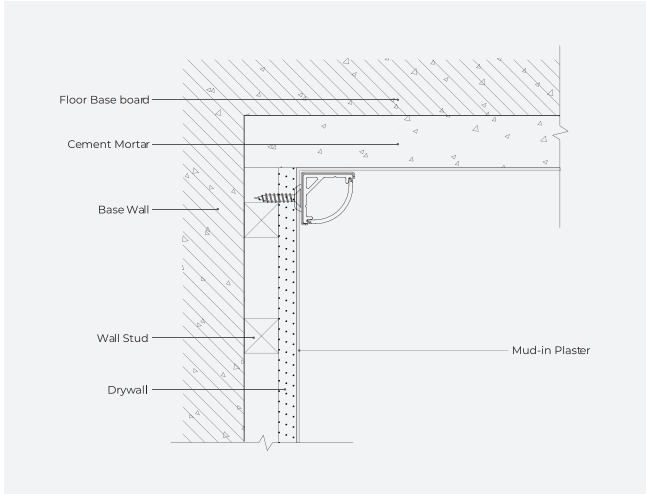

Effect image



LG3030C

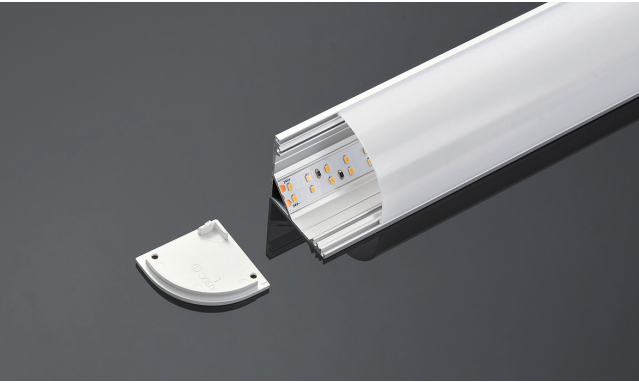



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500×W30×H30mm 98.43"×1.18"×1.18"	
Diffuser	L2500×W28.9×H28.9mm 98.43"×1.14"×1.14"	
Holeless end caps	EC-LG3030C L30×W30×H5mm 1.18"×1.18"×0.20"	
End cap with hole	EC-LG3030C L30×W30×H5mm 1.18"×1.18"×0.20"	

Installation Accessories	
Ceiling clip	CP-14 31×31×14mm 1.22"×1.22"×0.55"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/m 4.6W/ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

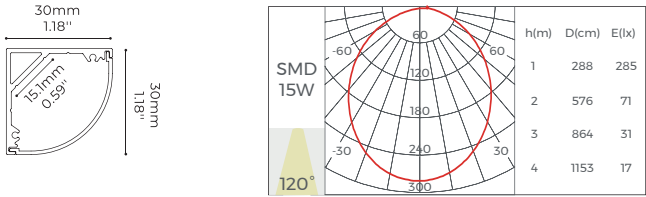

Structure image

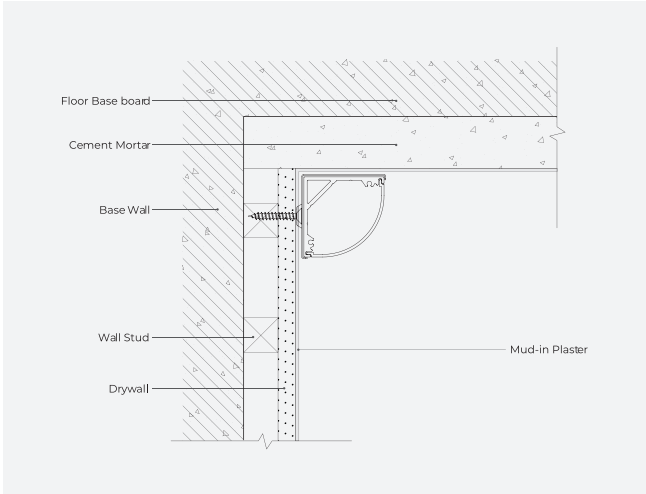

Effect image



LG3030K





Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500×W30×H30mm 98.43"×1.18"×1.18"	
Diffuser	L2500×W29.2×H29.2mm 98.43"×1.15"×1.15"	
Holeless end caps	EC-LG3030K L30×W30×H5mm 1.18"×1.18"×0.20"	
End cap with hole	EC-LG3030K L30×W30×H5mm 1.18"×1.18"×0.20"	

Installation Accessories	
Ceiling clip	CP-14 31×31×14mm 1.22"×1.22"×0.55"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m 460LM/ft	24V	15W/m 4.6W/ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	14LEDs/ 50mm 14LEDs/ 1.97"

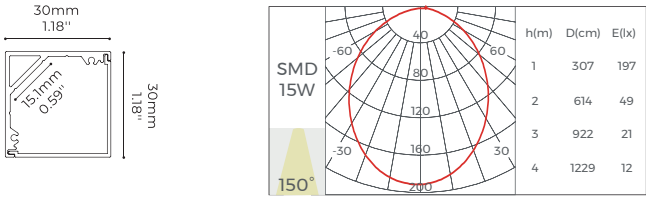


Structure image

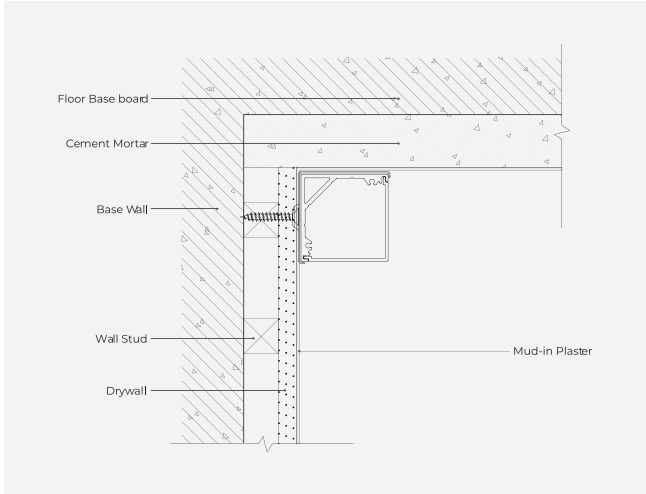

Effect image



LR1616

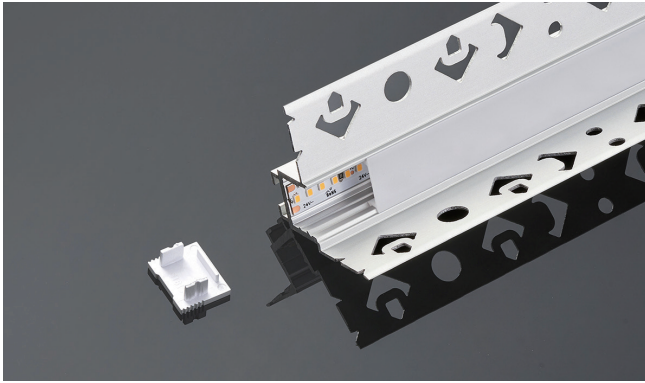

Basic Parameters


Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W38.4×H36.5mm 98.43"×1.51"×1.44"	
Diffuser	L2500×W14.7×H4.5mm 98.43"×0.58"×0.18"	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm 98.43"×0.58"×0.17"	
Holeless end caps	EC-LR1616 L7×W16×H13mm 0.28"×0.63"×0.51"	
End cap with hole	EC-LR1616 L7×W16×H13mm 0.28"×0.63"×0.51"	


Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

8mm 0.31"
50mm 1.97"

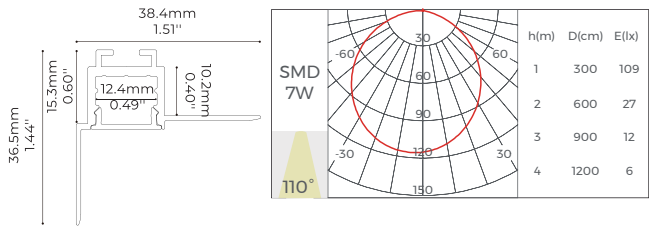


Structure image

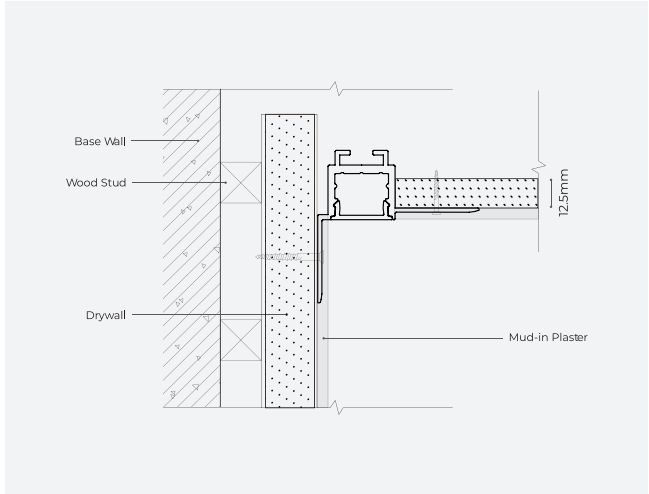

Effect image



LR3840(A)

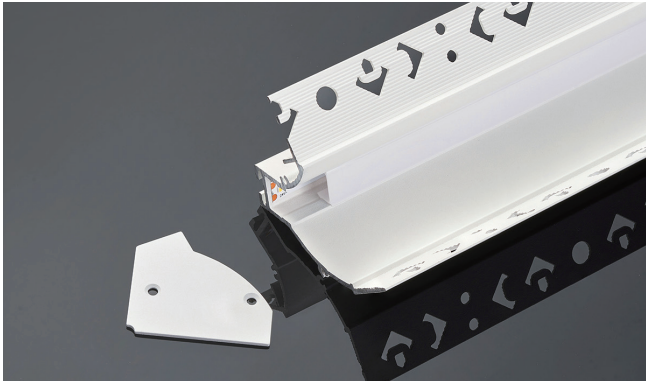

Basic Parameters


Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W64.5×H60mm 98.43"×2.54"×2.36"	
Diffuser	L2500×W13.5×H8.5mm 98.43"×0.53"×0.33"	
Holeless end caps	EC-LR3840(A) L43.3×W40×H1.5mm 1.71"×1.57"×0.06"	


Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/ m 503LM/ft	24V	15W/ m 4.6W/ft	5000×8×1.3mm 196.85"×0.31"×0.05"	280LEDs	7LEDs/ 25mm 7LEDs/ 0.98"

8mm 0.31"
25mm 0.98" 25mm 0.98" 25mm 0.98"

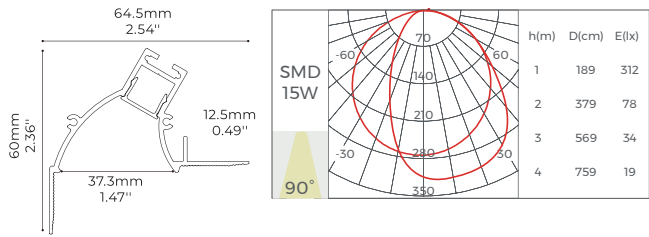


Structure image

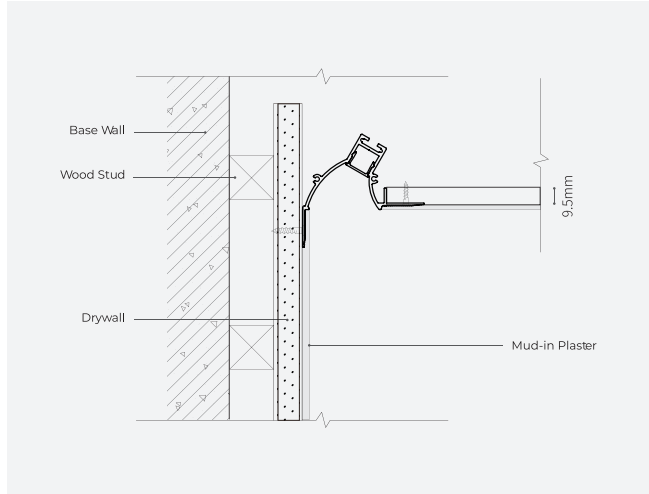

Effect image



LR3840(B)

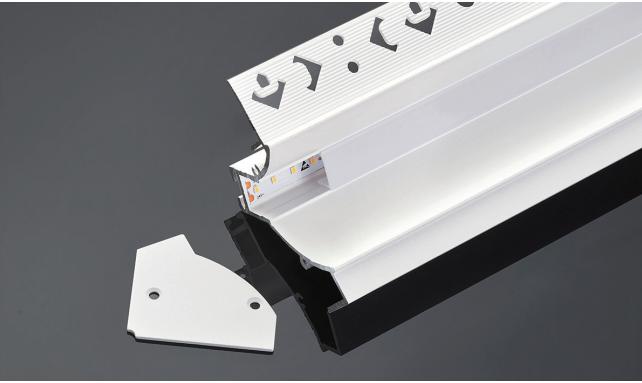

Profile Components		
Profile	L2500XW73.3XH40mm 98.43"x2.89"x1.57"	
Diffuser	L2500XW13.5XH8.5mm 98.43"x0.53"x0.33"	
Holeless end caps	EC-LR3840(B) L43.3XW40XH1.5mm 1.70"x1.57"x0.06"	
Installation Accessories		
Screw	CL-01 M3.5X40mm M0.14"x1.57"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m 503LM/ft	24V	15W/m 4.6W/ft	5000X8X1.3mm 196.85"x0.31"x0.05"	280LEDs 7LEDs/25mm 7LEDs/0.98"	






Diagram showing the flexible strip with dimensions: 8mm (0.31") height, 25mm (0.98") segments, and 25mm (0.98") segments.

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

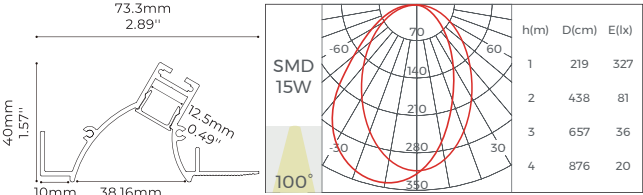


Structure image

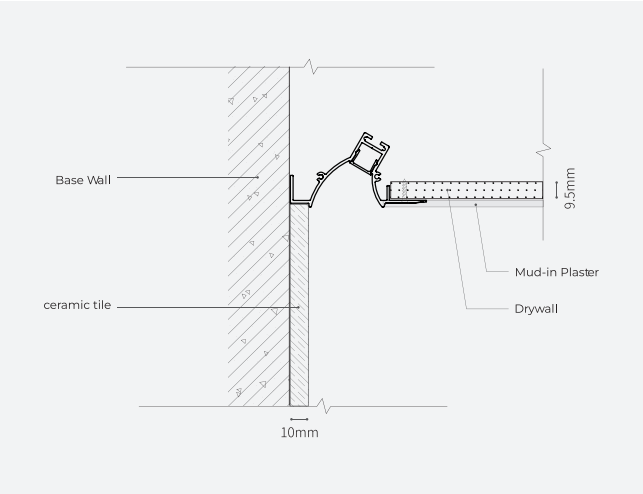

Effect image



LG7043

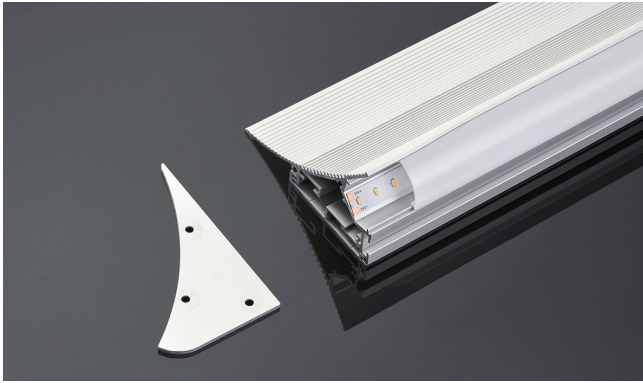

Profile Components		
Profile	L2500XW43XH70mm 98.43"x1.69"x2.76"	
Diffuser	L2500XW18.9XH6.5mm 98.43"x0.74"x0.26"	
Holeless end caps	EC-LG7043 L70XW43XH2mm 2.76"x1.69"x0.08"	
Installation Accessories		
Screw	CL-01 M3.5X40mm M0.14"x1.57"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs 7LEDs/50mm 7LEDs/1.97"	






Diagram showing the flexible strip with dimensions: 8mm (0.31") height, 50mm (1.97") segments, and 25mm (0.98") segments.

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

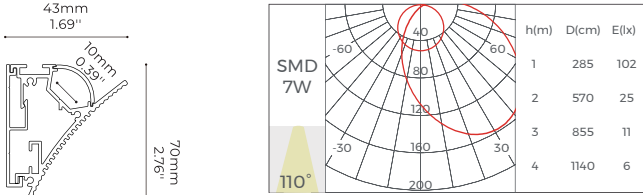


Structure image

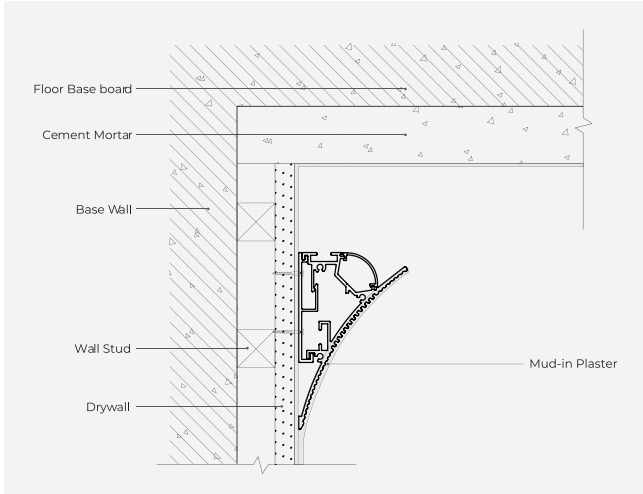

Effect image



SK6013(A)

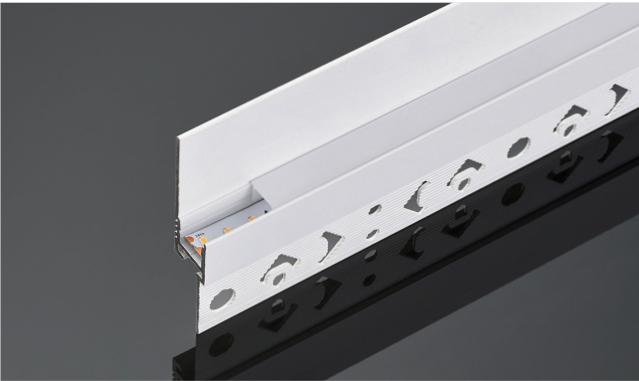

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components	
Profile	L2500×W13.2×H60mm 98.43"×0.52"×2.36"
Diffuser	L2500×W10.3×H6.8mm 98.43"×0.41"×2.7"

Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

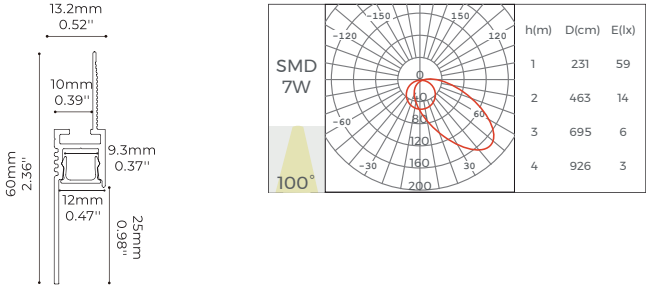

Structure image

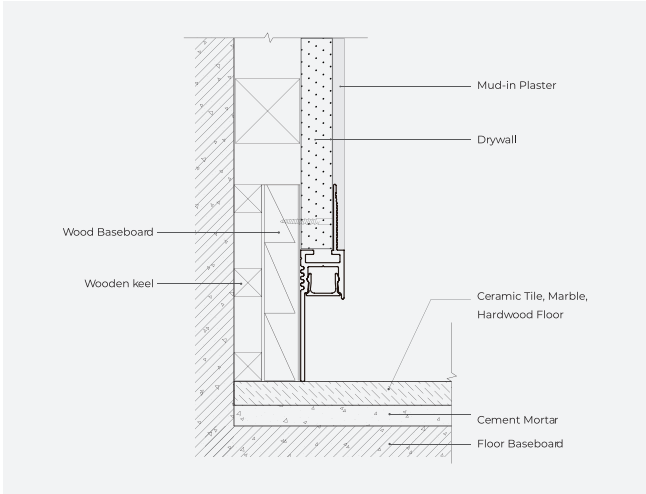

Effect image



SK6013(B)



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components	
Profile	L2500×W13.2×H60mm 98.43"×0.52"×2.36"
Diffuser	L2500×W10.3×H6.8mm 98.43"×0.41"×2.7"

Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

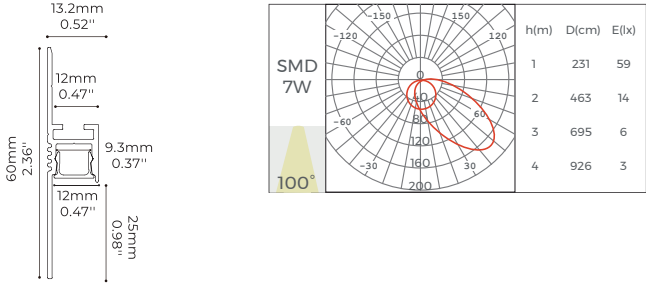


Structure image

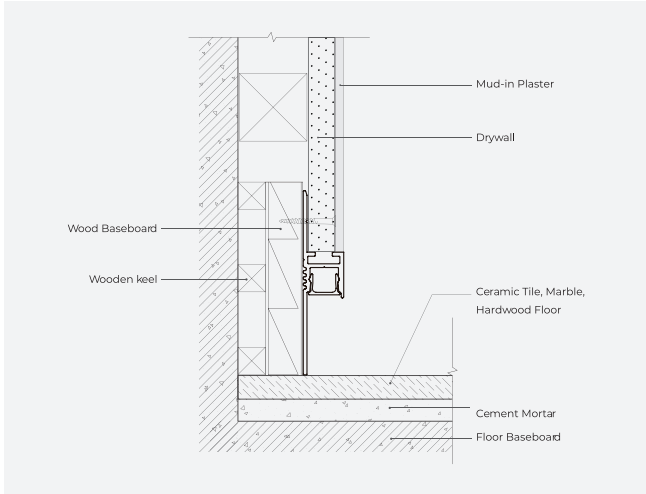

Effect image



SK8513(B)

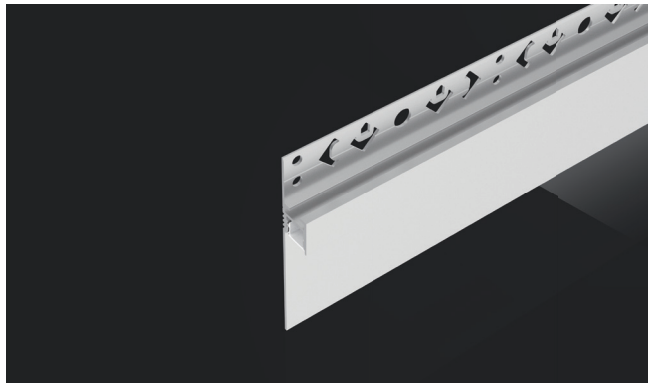

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components



Profile	L2500XW13.2XH85mm 98.43"x0.52"x3.35"	
Diffuser	L2500XW10.3XH6.8mm 98.43"x0.41"x0.27"	

Installation Accessories


Screw	CL-01 M3.5X40mm M0.14"x1.57"	
-------	------------------------------------	--

Light Source

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

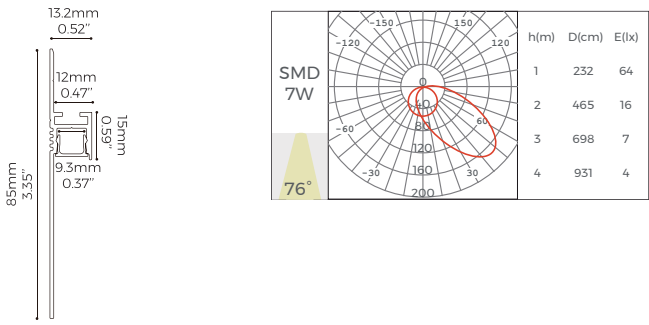


Structure image

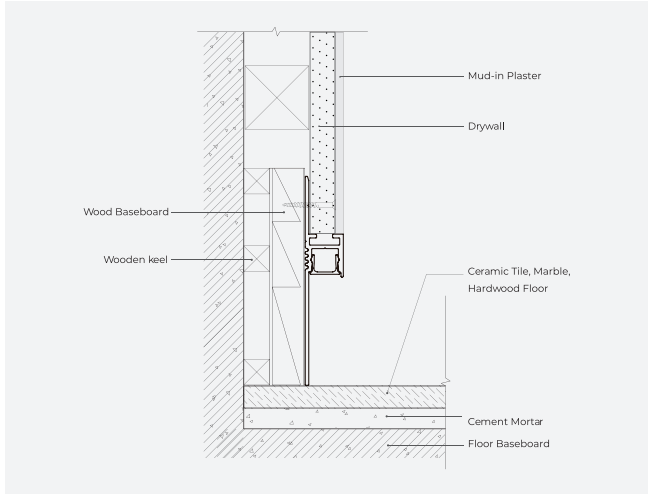

Effect image



LS2126

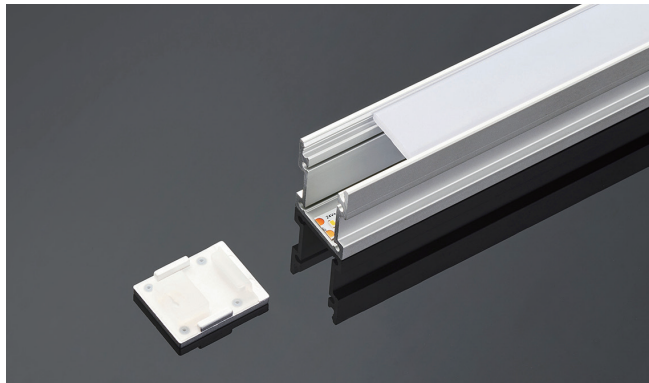

Basic Parameters



Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10

Profile Components


Profile	L2500XW21.4XH27mm 98.43"x0.84"x1.06"	
Diffuser	L2500XW18XH3.4mm 98.43"x0.71"x0.13"	
Holeless end caps	EC-LS2126 L27XW21.4XH5mm 1.06"x0.84"x0.20"	
End cap with hole	EC-LS2126 L27XW21.4XH5mm 1.06"x0.84"x0.20"	

Light Source


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000X8X1.2mm 196.85"x0.31"x0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"

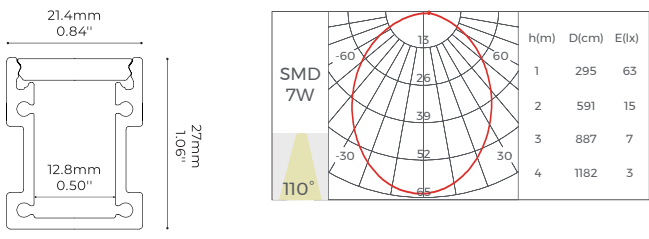

Structure image

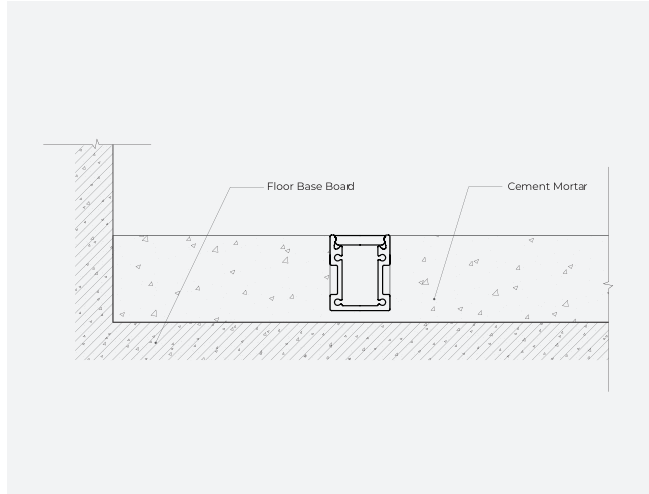

Effect image

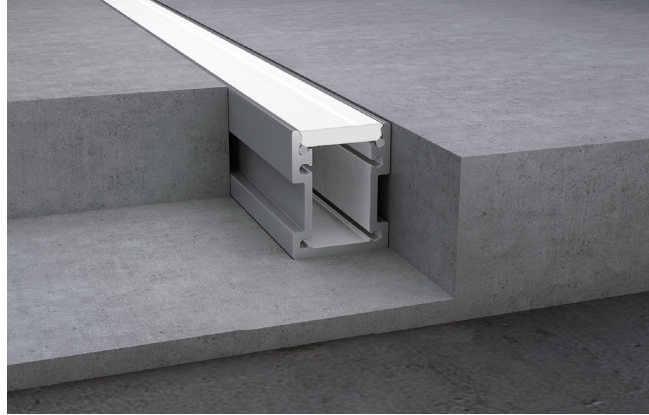


LE2711




Profile Components		
Profile	L2500×W27×H11mm 98.43"×1.06"×0.43"	
Diffuser	L2500×W18×H3.4mm 98.43"×0.71"×0.13"	
Holeless end caps	EC-LE2711 L27.2×W11×H7.8mm 1.07"×0.43"×0.31"	
End cap with hole	EC-LE2711 L27.2×W11×H7.8mm 1.07"×0.43"×0.31"	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit


D8168-24V-10mm	>90	1860LM/M 567LM/ft	24V	16.2W/M 4.9W/ft	5000x10x1.6mm 196.85"x0.39"x0.06"	168LEDs	7LEDs/ 42mm 7LEDs/ 1.65"
----------------	-----	----------------------	-----	--------------------	--------------------------------------	---------	-----------------------------------



Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10

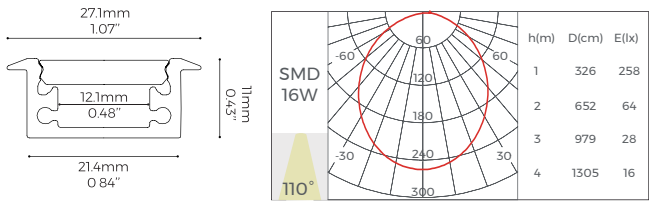

Structure image

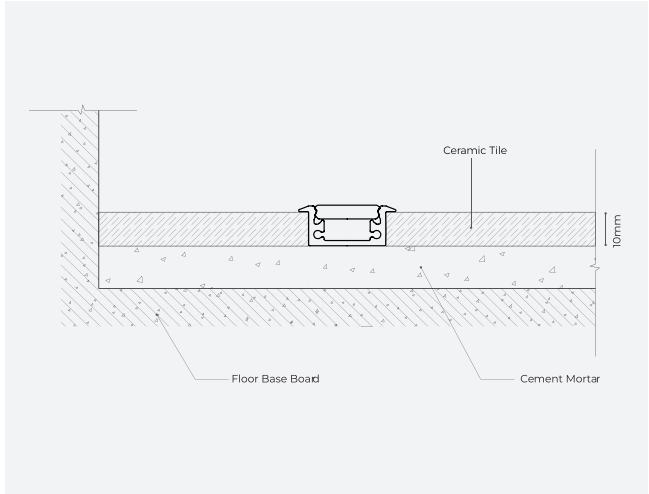

Effect image

















ALS ECO



ALS ECO, is based on ALS Series to get upgrade on process to be more cost-effective. It can be recessed in micro scenes and corners to be profile-less full light look.

Product Overview

Ceiling	Trimless recessed	Recessed	Corner	Bend
BS1010  234 10x10MM 0.39"x0.39"	BR1613(A)  236 48.2x13MM 1.90"x0.51"	BE1010  237 14x10MM 0.55"x0.39"	BG1010C  239 10x10MM 0.39"x0.39"	BS1505  242 15x5.53MM 0.59"x0.22"
BS1515  234 15x15MM 0.59"x0.59"	BR1613(B)  236 32.1x13MM 1.26"x0.51"	BE1515  237 19x15MM 0.75"x0.59"	BG1616C  240 16x16MM 0.63"x0.63"	BS1805  242 18x5.5MM 0.71"x0.22"
BS1607  235 16x7MM 0.63"x0.28"		BE2007  238 20x7MM 0.79"x0.28"	BG1818  240 18x18MM 0.71"x0.71"	BS1303  243 13.4x2.8MM 0.53"x0.11"
BS1613  235 16x13MM 0.63"x0.51"		BE2507  238 25x7MM 0.98"x0.28"	BG4223  241 42x22.4MM 1.65"x0.88"	
		BE2513  239 25x13MM 0.98"x0.51"	BG4920  241 48.6x19.5MM 1.91"x0.77"	



BS1010

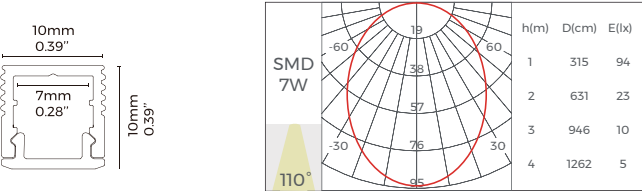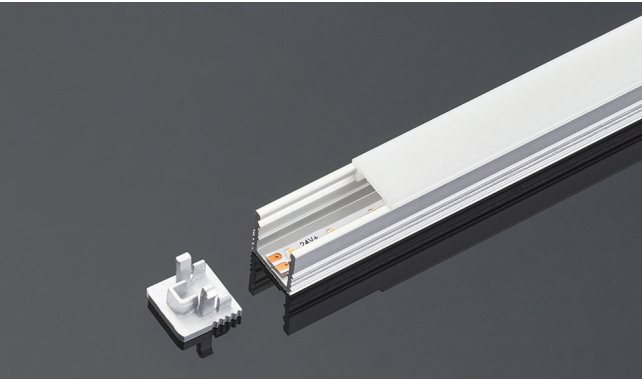

Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW10XH8.9mm 98.43"x0.39"x0.35"	
Diffuser	L2500XW10XH3.5mm 98.43"x0.39"x0.14"	
Holeless end caps	EC-BS1010 L10XW10XH7.5mm 0.39"x0.39"x0.30"	
End cap with hole	EC-BS1010 L10XW10XH7.5mm 0.39"x0.39"x0.30"	

Installation Accessories



Mounting clip	CP-36 L12XW15XH4.5mm 0.47"x0.59"x0.18"	
---------------	--	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000X4X 1.2mm 196.85"x0.16"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BS1515

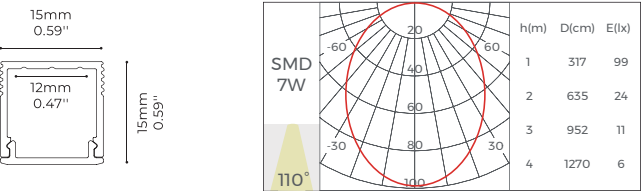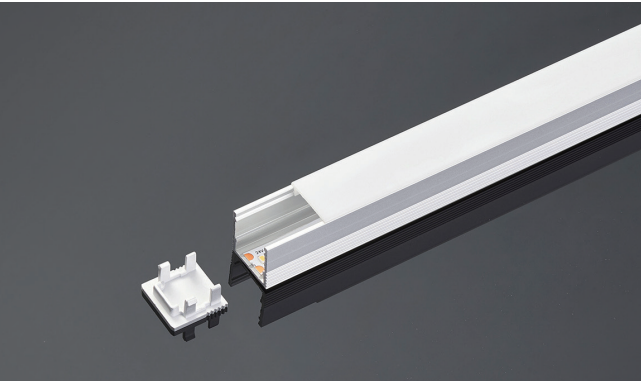

Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW15XH13.9mm 98.43"x0.59"x0.55"	
Diffuser	L2500XW15XH3.5mm 98.43"x0.59"x0.14"	
Holeless end caps	EC-BS1515 L15XW15XH7.5mm 0.59"x0.59"x0.30"	
End cap with hole	EC-BS1515 L15XW15XH7.5mm 0.59"x0.59"x0.30"	

Installation Accessories


Mounting clip	CP-37 L17XW15XH4.5mm 0.67"x0.59"x0.18"	
---------------	--	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BS1607

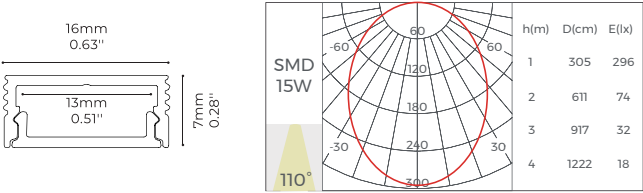

Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW16XH7mm 98.43"x0.63"x0.28"	
Diffuser	L2500XW14.49XH3.5mm 98.43"x0.58"x0.14"	
Holeless end caps	EC-BS1607 L16XW7XH7.5mm 0.63"x0.28"x0.30"	
End cap with hole	EC-BS1607 L16XW7XH7.5mm 0.63"x0.28"x0.30"	

Installation Accessories



Mounting clip	CP-04 17.8X15X4.5mm 0.70"x0.59"x0.18"	
0-180° adjustable mounting clip	CP-06 35X17.7X21.4mm 1.38"x0.70"x0.84"	

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m 503LM/ft	24V	15W/ m 4.6W/ft	5000X8X 1.3mm 196.85"x0.31"x 0.05"	280LEDs	7LEDs/ 25mm 7LEDs/ 0.98"



BS1613

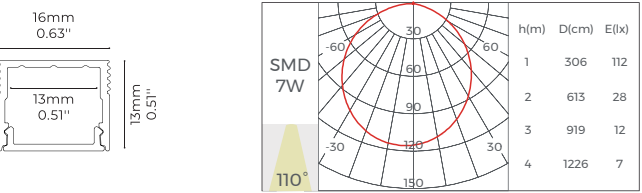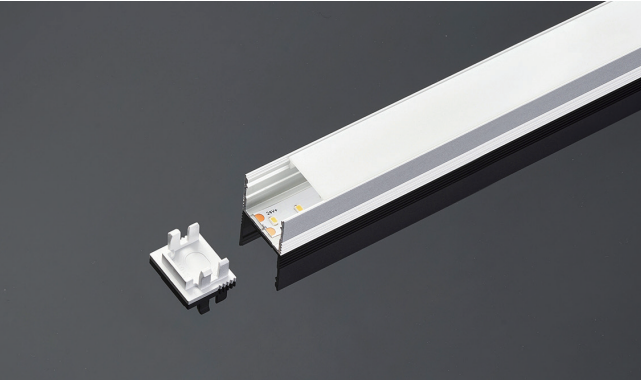

Basic Parameters

Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500XW16XH13mm 98.43"x0.63"x0.51"	
Diffuser	L2500XW14.49XH3.5mm 98.43"x0.57"x0.14"	
Holeless end caps	EC-BS1613 L16XW13XH7.5mm 0.63"x0.51"x0.30"	
End cap with hole	EC-BS1613 L16XW13XH7.5mm 0.63"x0.51"x0.30"	

Installation Accessories



Mounting clip	CP-04 17.8X15X4.5mm 0.70"x0.59"x0.18"	
0-180° adjustable mounting clip	CP-06 35X17.7X21.4mm 1.38"x0.70"x0.84"	

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BR1613(A)

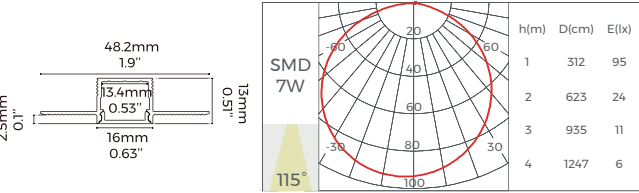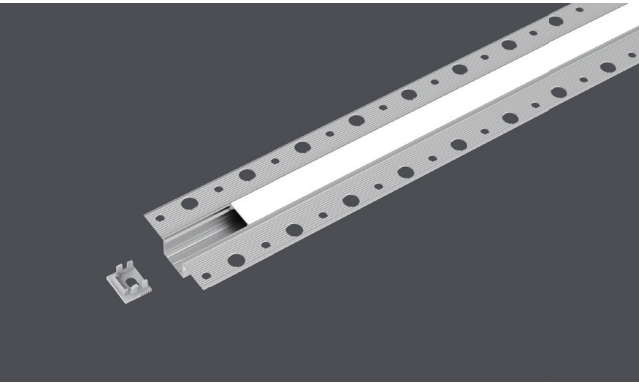

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized

Profile Components


Profile	L2500×W48.2×H13mm 98.43"×1.90"×0.51"	
Diffuser	L2500×W14.49×H3.5mm 98.43"×0.57"×0.14"	
Holeless end caps	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"	
End cap with hole	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"	

Installation Accessories



Screw	CL-01 M3.5×40mm M0.14"×1.57"	
-------	------------------------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8X 1.2mm 196.85"×0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BR1613(B)

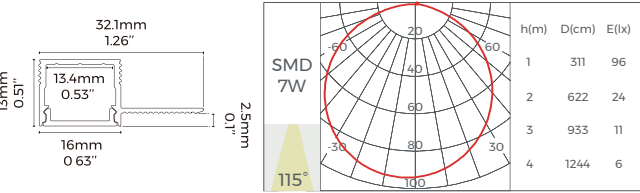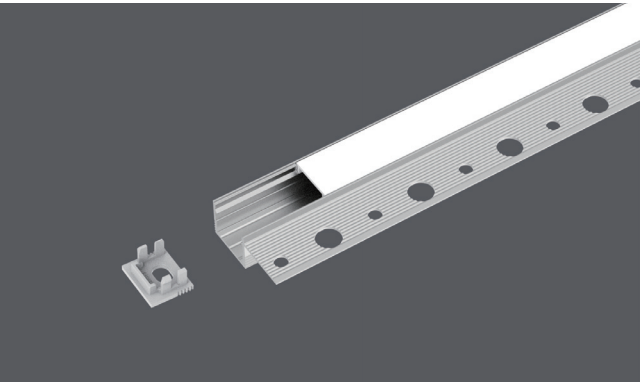

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized

Profile Components


Profile	L2500×W32.1×H13mm 98.43"×1.26"×0.51"	
Diffuser	L2500×W14.49×H3.5mm 98.43"×0.57"×0.14"	
Holeless end caps	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"	
End cap with hole	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"	

Installation Accessories


Screw	CL-01 M3.5×40mm M0.14"×1.57"	
-------	------------------------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8X 1.2mm 196.85"×0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BE1010

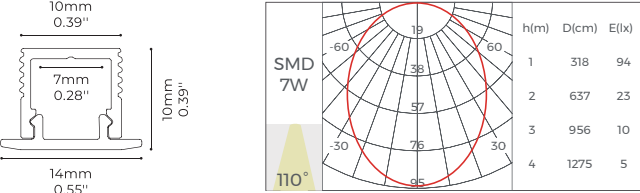

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500×W10×H8.9mm 98.43"×0.39"×0.35"	
Diffuser	L2500×W14×H3.5mm 98.43"×0.55"×0.14"	
Holeless end caps	EC-BE1010 L14×W10×H7.5mm 0.55"×0.39"×0.30"	
End cap with hole	EC-BE1010 L14×W10×H7.5mm 0.55"×0.39"×0.30"	

Installation Accessories



Embedded clip	CP-38 L15.8×W24×H8mm L0.62"×0.94"×0.31"	
---------------	---	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-4mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×4X 1.2mm 196.85"×0.16"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BE1515

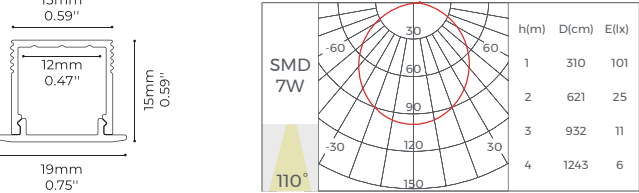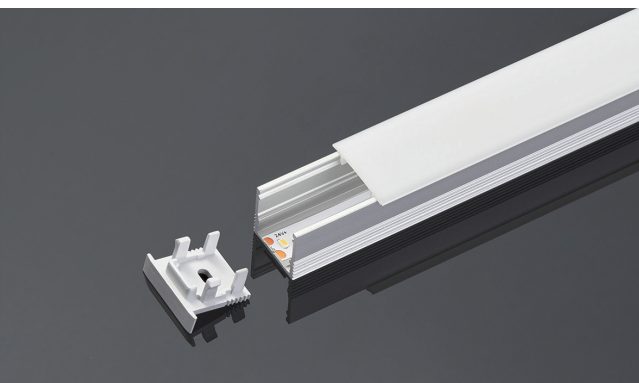

Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500×W15×H13.9mm 98.43"×0.59"×0.55"	
Diffuser	L2500×W19×H3.5mm 98.43"×0.75"×0.14"	
Holeless end caps	EC-BE1515 L19×W15×H7.5mm 0.75"×0.59"×0.30"	
End cap with hole	EC-BE1515 L19×W15×H7.5mm 0.75"×0.59"×0.30"	

Installation Accessories



Embedded clip	CP-39 L24×W20.79×H8.5mm L0.94"×0.82"×0.33"	
---------------	--	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8X 1.2mm 196.85"×0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"




BE2007

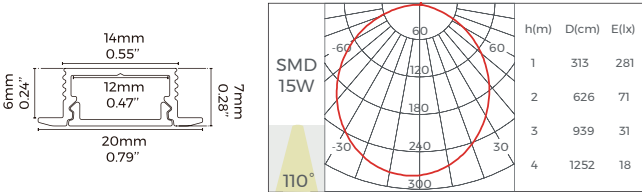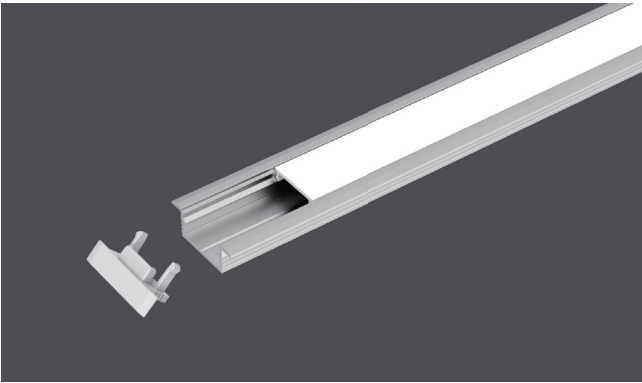


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500XW20XH7mm 98.43"x0.79"x0.28"	
Diffuser	L2500XW12.6XH3mm 98.43"x0.50"x0.12"	
Holeless end caps	EC-BE2007 L20XW7XH4.5mm 0.79"x0.28"x0.18"	
End cap with hole	EC-BE2007 L20XW7XH4.5mm 0.79"x0.28"x0.18"	

Installation Accessories	
Embedded clip	CP-47 L24XW15.4XH6.3mm 0.94"x0.61"x0.25"

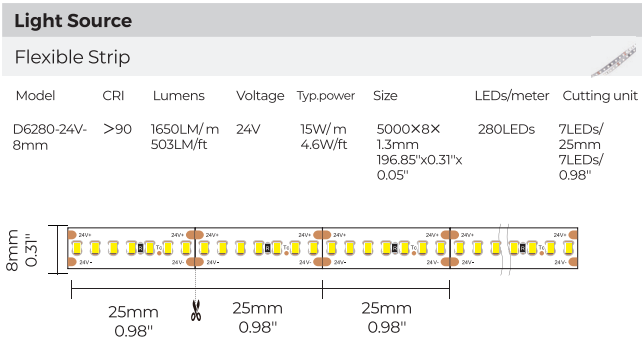


BE2507

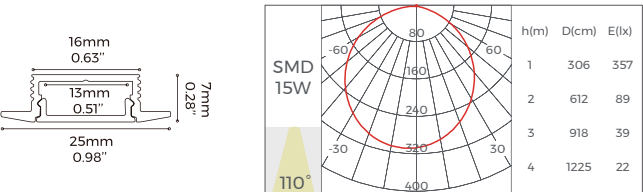


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500XW25XH7mm 98.43"x0.98"x0.28"	
Diffuser	L2500XW14.49XH3.5mm 98.43"x0.57"x0.14"	
Holeless end caps	EC-BE2507 L25XW7XH11.5mm 0.98"x0.28"x0.45"	
End cap with hole	EC-BE2507 L25XW7XH11.5mm 0.98"x0.28"x0.45"	

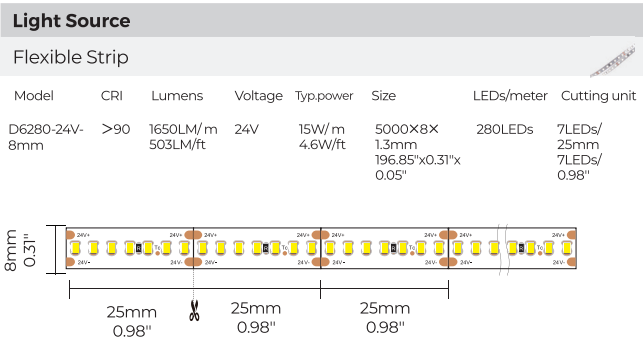


BE2513

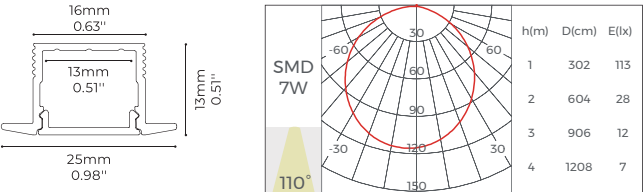


Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500XW25XH13mm 98.43"x0.98"x0.51"	
Diffuser	L2500XW14.49XH3.5mm 98.43"x0.57"x0.14"	
Holeless end caps	EC-BE2513 L25XW13XH11.5mm 0.98"x0.51"x0.45"	
End cap with hole	EC-BE2513 L25XW13XH11.5mm 0.98"x0.51"x0.45"	

Installation Accessories	
Embedded clip	CP-12 L21.79XW20XH11mm 0.86"x0.79"x0.43"

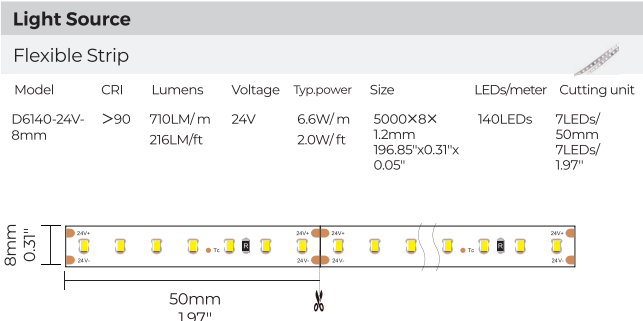


BC1010C

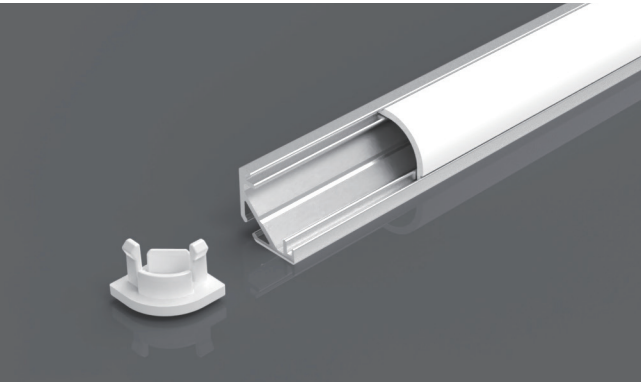


Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500XW10XH10mm 98.43"x0.39"x0.39"	
Diffuser	2500x W11x H4.4mm 98.43"x0.43"x0.17"	
Holeless end caps	EC-BC1010C L10.0x W10.0x H7.5mm 0.39"x0.39"x0.30"	
End cap with hole	EC-BC1010C L10.0x W10.0x H7.5mm 0.39"x0.39"x0.30"	

Installation Accessories	
Mounting clip	CP-48 L11.0x W10.8x H10.8mm 0.43"x0.43"x0.43"

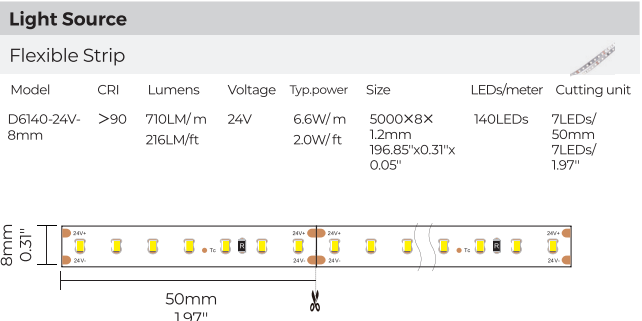

BG1616C

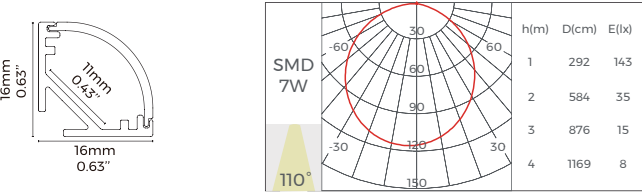

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components	
Profile	L2500×W16×H16mm 98.43"×0.63"×0.63"
Diffuser	L2500×W19.4×H6mm 98.43"×0.76"×0.24"
Holeless end caps	EC-BG1616C L16×W16×H7.5mm 0.63"×0.63"×0.30"
End cap with hole	EC-BG1616C L16×W16×H7.5mm 0.63"×0.63"×0.30"

Installation Accessories	
Mounting clip	CP-13 L15×W17×H17mm L0.59"×0.67"×0.67"



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BG1818

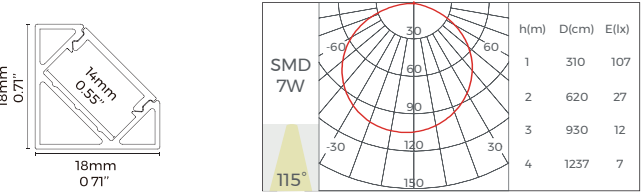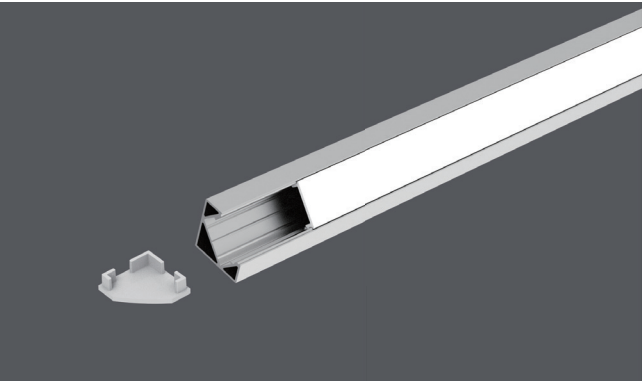

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components	
Profile	L2500×W18×H18mm 98.43"×0.71"×0.71"
Diffuser	L2500×W14.5×H3.5mm 98.43"×0.57"×0.14"
Holeless end caps	EC-BG1818 L18.0x W18.0x H7.5mm 0.71"×0.71"×0.30"
End cap with hole	EC-BG1818 L18.0x W18.0x H7.5mm 0.71"×0.71"×0.30"


Installation Accessories	
Mounting clip	CP-49 L19.5x W19.5x H13.8mm L0.77"×0.77"×0.54"

Light Source



Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/m 2.0W/ft	5000×8×1.2mm 196.85"×0.31"×0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BG4223

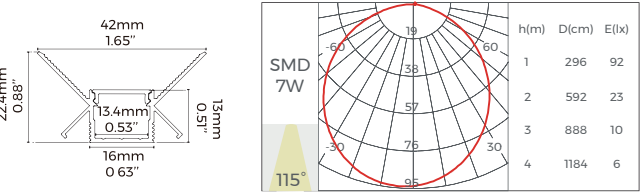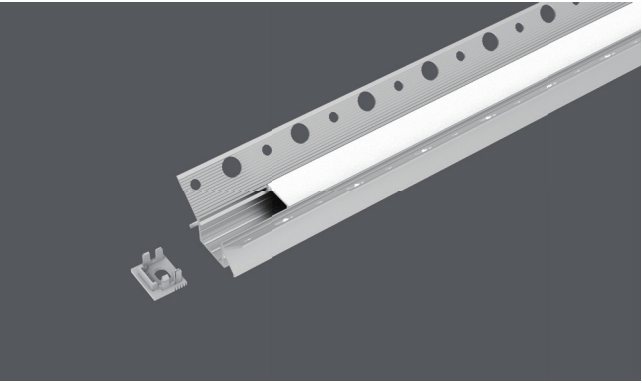

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized

Profile Components	
Profile	L2500×W42×H22.4mm 98.43"×1.65"×0.88"
Diffuser	L2500×W14.49×H3.5mm 98.43"×0.57"×0.14"
Holeless end caps	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"
End cap with hole	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"


Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"

Light Source



Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ ft	5000X8X 1.2mm 196.85"x0.31"x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BG4920

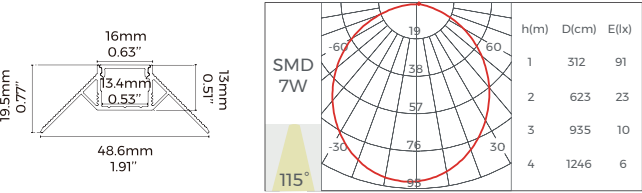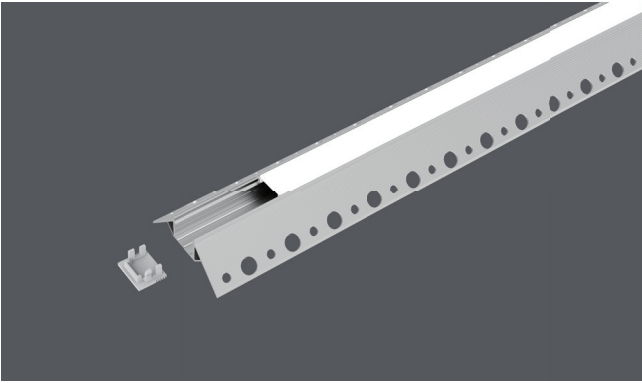

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized


Profile Components	
Profile	L2500×W48.6×H19.5mm 98.43"×1.91"×0.77"
Diffuser	L2500×W14.49×H3.5mm 98.43"×0.57"×0.14"
Holeless end caps	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"
End cap with hole	EC-BS1613 L16×W13×H7.5mm 0.63"×0.51"×0.30"

Installation Accessories	
Screw	CL-01 M3.5×40mm M0.14"×1.57"



Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m 216LM/ft	24V	6.6W/ m 2.0W/ ft	5000×8× 1.2mm 196.85"×0.31" x 0.05"	140LEDs	7LEDs/ 50mm 7LEDs/ 1.97"



BS1505

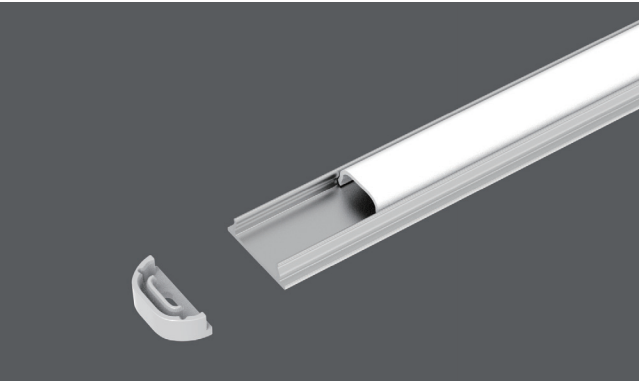

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500x W15.0x H4mm 98.43"x0.59"x0.16"	
Diffuser	L2500x W10.7x H4.5mm 98.43"x0.42"x0.18"	
Holeless end caps	EC-BS1505 L15.0x W5.5x H5mm L0.59"x0.22"x0.20"	
End cap with hole	EC-BS1505 L15.0x W5.5x H5mm L0.59"x0.22"x0.20"	

Installation Accessories



Mounting clip	CP-45 L19.0x W16xH4.3mm L0.75"x0.63"x0.17"	
---------------	--	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DF6N-24V-8mm	>90	600LM/ m 183LM/ft	24V	10.0W/m 3.0W/ft	5000X8X 1.5mm 196.85"x0.31"x 0.06"	/	3.68mm 0.14"



BS1805

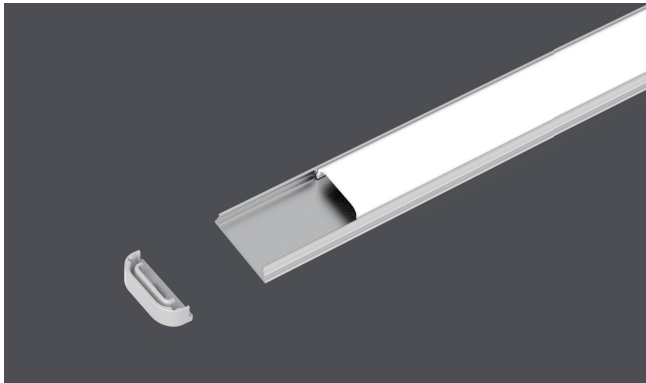

Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components


Profile	L2500x W18.0x H4.0mm 98.43"x0.71"x0.16"	
Diffuser	L2500x W15.1x H4.5mm 98.43"x0.59"x0.18"	
Holeless end caps	EC-BS1805 L18.0x W5.5xH5mm L0.71"x0.22"x0.20"	
End cap with hole	EC-BS1805 L18.0x W5.5xH5mm L0.71"x0.22"x0.20"	

Installation Accessories



Mounting clip	CP-46 L19.0x W19.6xH4.1mm L0.75"x0.77"x0.16"	
---------------	--	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DF6N-24V-8mm	>90	600LM/ m 183LM/ft	24V	10.0W/m 3.0W/ft	5000X8X 1.5mm 196.85"x0.31"x 0.06"	/	3.68mm 0.14"



BS1303

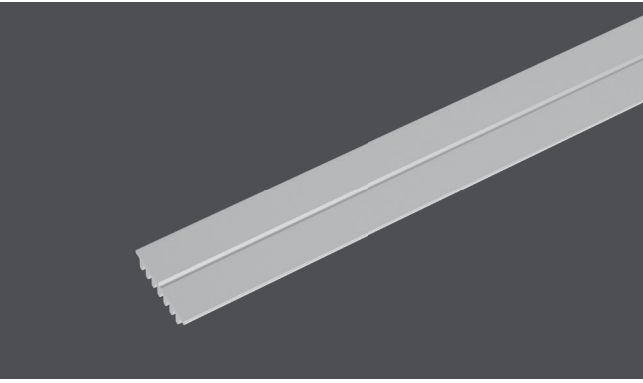

Basic Parameters

Installation	Ceiling
Material	AL6063-T5
Coating	Silver anodized

Profile Components


Profile	L2500X W13.4X H2.8mm 98.43"x0.53"x0.11"	
---------	--	--

Installation Accessories

Screw	C1-24 M3.5X15mm M0.14"x1.57"	
-------	------------------------------------	--

Light Source

Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DF6N-24V-8mm	>90	600LM/ m 183LM/ft	24V	10.0W/m 3.0W/ft	5000X8X 1.5mm 196.85"x0.31"x 0.06"	/	3.68mm 0.14"



Product Series

48V Magnetic track

TLSE-M20 & TLS-R

TLSE-M20 & TLS-R is a DC48V magnetic track system of 20mm width. Its magnetic design offers great DIY convenience to flexibly combine linear modules, spotlights, pendant lights and decorative neon flex in one system, achieving all your lighting demands like basic flood lighting, accent lighting or decorative lighting, suitable for residential villas, hotel clubs, entertainment venues or commercial exhibitions, etc.



Free-dot

HOLA

HOLA refers to a 48V flexible recessed system that can realize re-use of product. It allows different optical modules to be flexibly integrated into ceiling and moved or replaced arbitrarily at ease thanks to their standardized mounting interface, satisfying your diversified design requirements and meanwhile achieving easy replacement of lights at low costs. The bases of modules are designed to fit perfectly into ceiling, calm and concise in look.





TLSE-M20 & TLS-R ^{NEW}

TLSE-M20 & TLS-R is a DC48V magnetic track system of 20mm (0.79") width. Its magnetic design offers great DIY convenience to flexibly combine linear modules, spotlights, pendant lights and decorative neon flex in one system, achieving all your lighting demands like basic flood lighting, accent lighting or decorative lighting, suitable for residential villas, hotel clubs, entertainment venues or commercial exhibitions, etc.

Product Overview

TLS-R/TLSE-M20 common modules

Spotlights Module

 320	 320	 321	 321	 322
M20S-30 φ30*55mm 1.18**2.17" 3W	M20S-42 φ42*68mm 1.65**2.68" 6W	M20S-52 φ52*95mm 2.05**3.74" 10W	M20S-62 φ62*145mm 2.44**5.71" 15W	M20SZ-45 φ45*100mm 1.77**3.94" 5W
 322	 323			
M20SZ-55 φ55*115mm 2.17**4.53" 8W	M20SZ-65 φ65*135mm 2.56**5.31" 12W			

Linear Module

 323	 324	 324	 325	 325
M20FD 23*41*300mm 7W 0.91**1.61**11.81" 23*41*600mm 14W 0.91**1.61**23.62" 23*41*900mm 20W 0.91**1.61**35.43"	M20FP 23*41*300mm 7W 0.91**1.61**11.81" 23*41*600mm 14W 0.91**1.61**23.62" 23*41*900mm 20W 0.91**1.61**35.43"	M20LA 23*41*300mm 7W 0.91**1.61**11.81" 23*41*600mm 14W 0.91**1.61**23.62" 23*41*900mm 20W 0.91**1.61**35.43"	M20LS 23*41*300mm 7W 0.91**1.61**11.81" 23*41*600mm 14W 0.91**1.61**23.62" 23*41*900mm 20W 0.91**1.61**35.43"	M20G 23*41*110mm 6W 0.91**1.61**4.33" 23*41*220mm 12W 0.91**1.61**8.66" 23*41*440mm 24W 0.91**1.61**17.32"
 326	 326	 327	 327	
M20G(A) 22.3*104*110mm 6W 0.88**4.09**4.33" 22.3*104*220mm 12W 0.88**4.09**8.66"	M20GW 23*70*600mm 10W 0.91**2.76**23.62" 23*70*1000mm 15W 0.91**2.76**39.37" 23*70*1200mm 20W 0.91**2.76**47.24"	M20CD φ30*600mm 12W φ1.18**23.62" φ30*900mm 18W φ1.18**35.43" φ30*1200mm 24W φ1.18**47.24"	M20CD(A) φ30*600mm 12W φ1.18**23.62" φ30*900mm 18W φ1.18**35.43" φ30*1200mm 24W φ1.18**47.24"	



TLS-R/TLSE-M20 common modules

Decorative Module

 328	 328	 329	 329	 330
M20NK-25 φ25*1000mm 12W φ0.98**39.37" φ25*2500mm 28W φ0.98**98.43" φ25*5000mm 60W φ0.98**196.85"	M20I-30 φ30*300mm φ1.18**11.81" 5W	M20I-50 φ50*300mm φ1.97**11.81" 5W	M20IJ-30 φ30*530mm φ1.18**20.87" 7W	M20IB-100 φ100*145mm φ3.94**5.71" 5W
 330	 331			
M20IW-40 φ40*100mm φ1.57**3.94" 3W	M20SS-55 φ55*208mm φ2.17**8.19" 3W			

TLS-R exclusive

Decorative Module

 331	 332
RNR30NK φ30*1000mm 14W φ1.18**39.37" φ30*2500mm 35W φ1.18**98.43" φ30*5000mm 70W φ1.18**196.85"	RNR30NJ φ30*1000mm 14W φ1.18**39.37" φ30*2500mm 35W φ1.18**98.43"

TLSE-M20 exclusive

Decorative Module


 332
M20NK-27 φ24.2*26.6*1000mm 9.6W φ0.95**1.05**39.37" φ24.2*26.6*1500mm 14.4W φ0.95**1.05**59.06" φ24.2*26.6*5000mm 48W φ0.95**1.05**196.85"



TLS-R Series

Neon track

Neon track is available as suspended and surface-mounted versions, the track can rotate horizontally, and the system also offers the option of different linear modules include diffuser,prismatic, in addition, spotlight, downlight and neon strip. These modules can be combined freely for different applications, at the same time, the track and the neon strip module can be creatively matched to achieve various rich stylings; The track system is operated with 48VDC, 30 (1.18") diameter, small and exquisite.

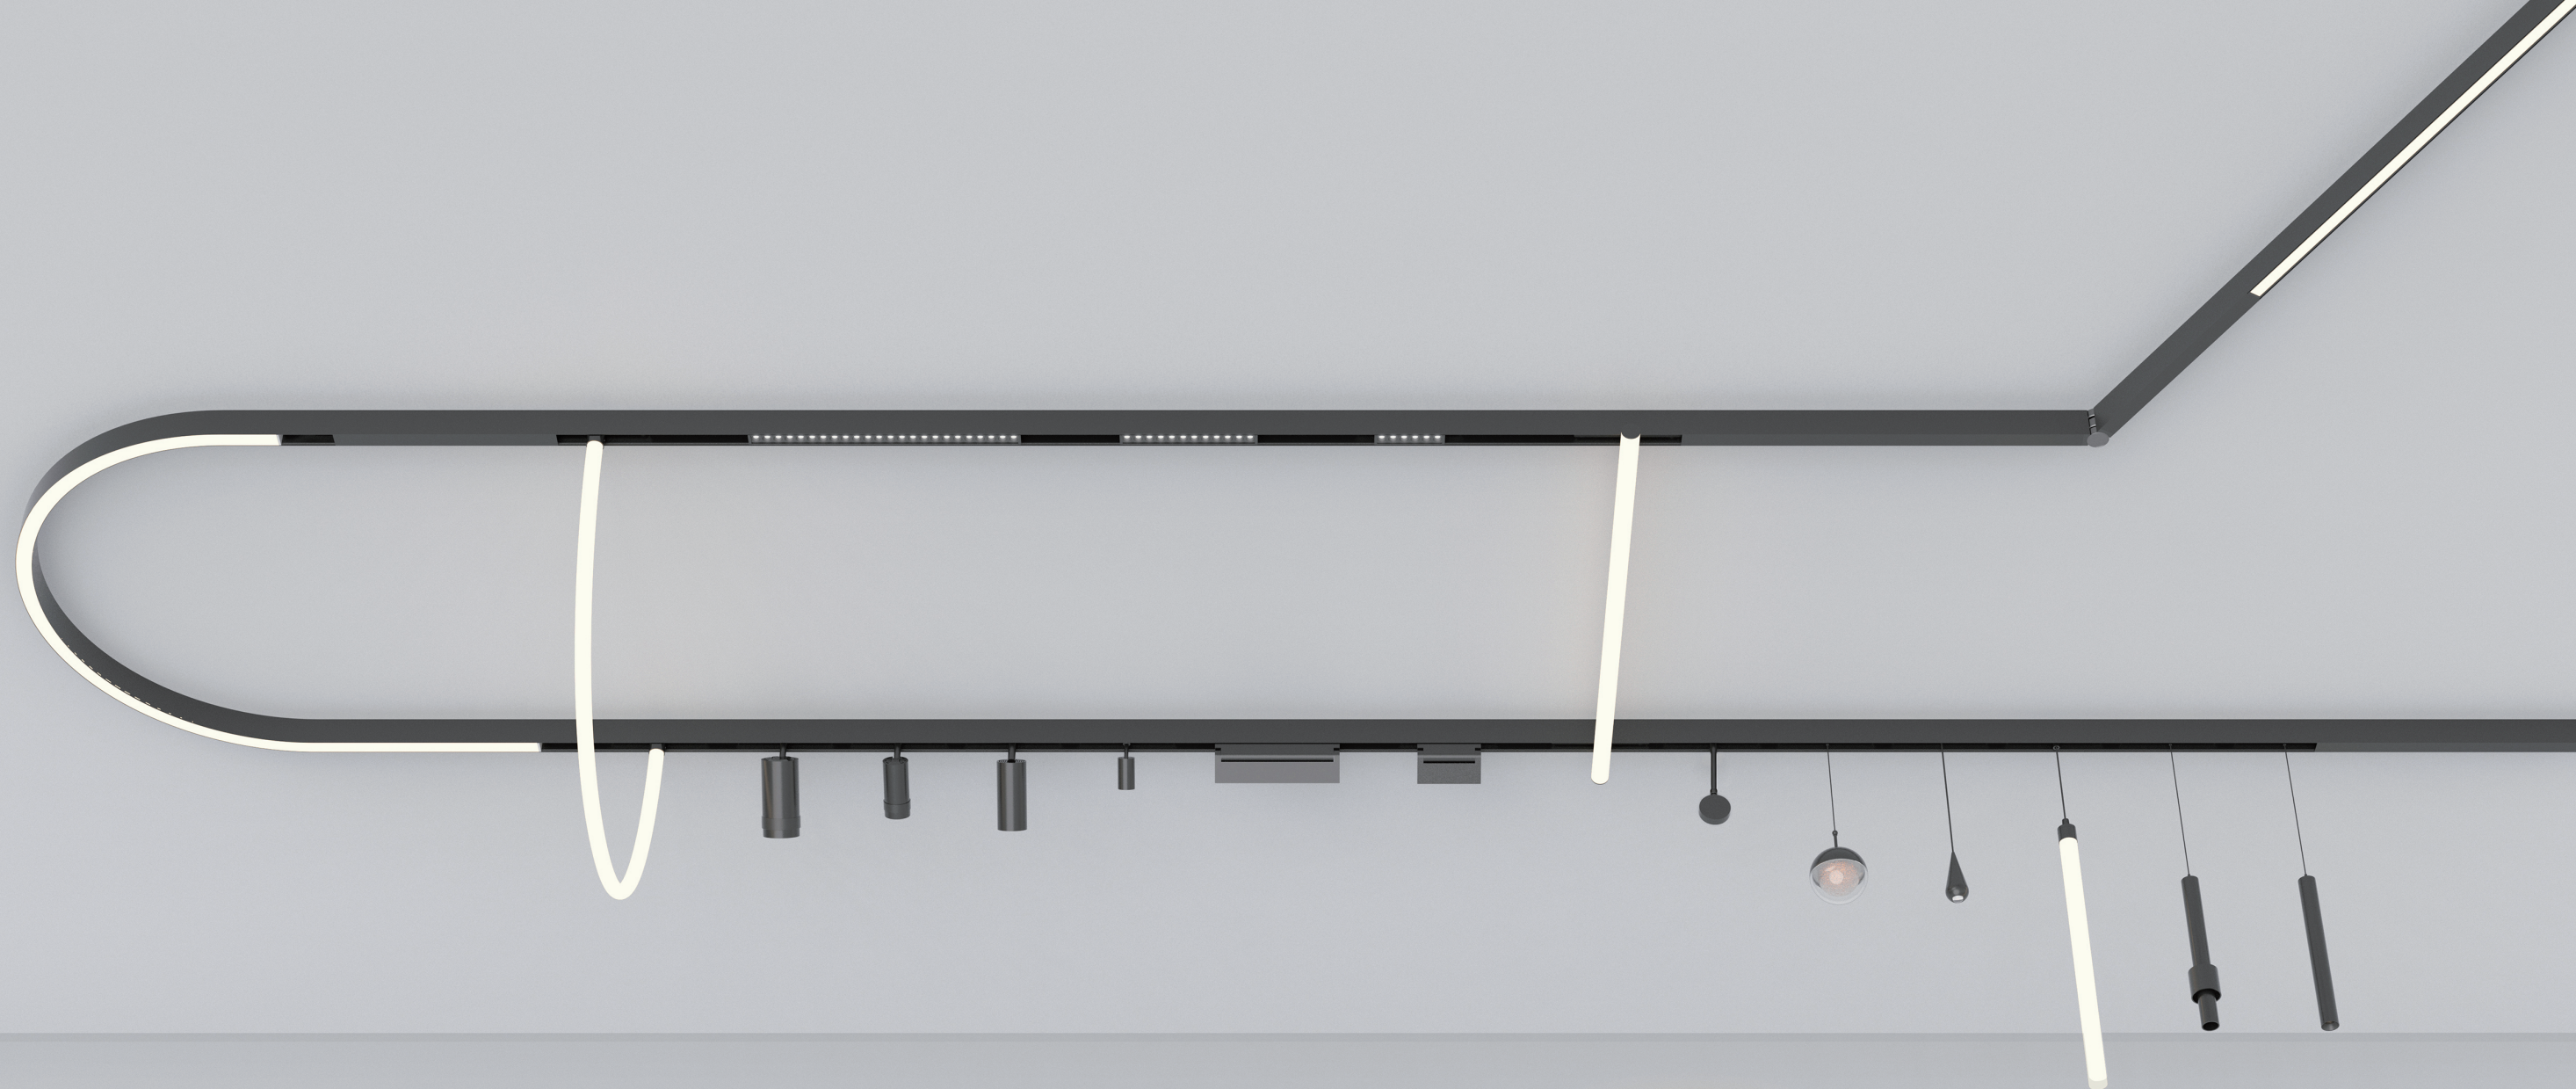

TLSE-M20 Series

TLSE-M20 is a DC48V magnetic track system of 20mm (0.79") width. Its magnetic design offers great DIY convenience to flexibly combine linear modules, spotlights, pendant lights and decorative neon flex in one system, achieving all your lighting demands like basic flood lighting, accent lighting or decorative lighting, suitable for residential villas, hotel clubs, entertainment venues or commercial exhibitions, etc.

Easy installation




DIY combination of modules

- Easy installation, pre-embed track and attach modules in seconds magnetically.
- Modular system, satifies various lighting demands.
- Movable and angle adjustable, add flexibility to light designs.
- Low-voltage, safe to touch and use.


Magnetic and marble design

- Minimalist installation
- Reliable and safe



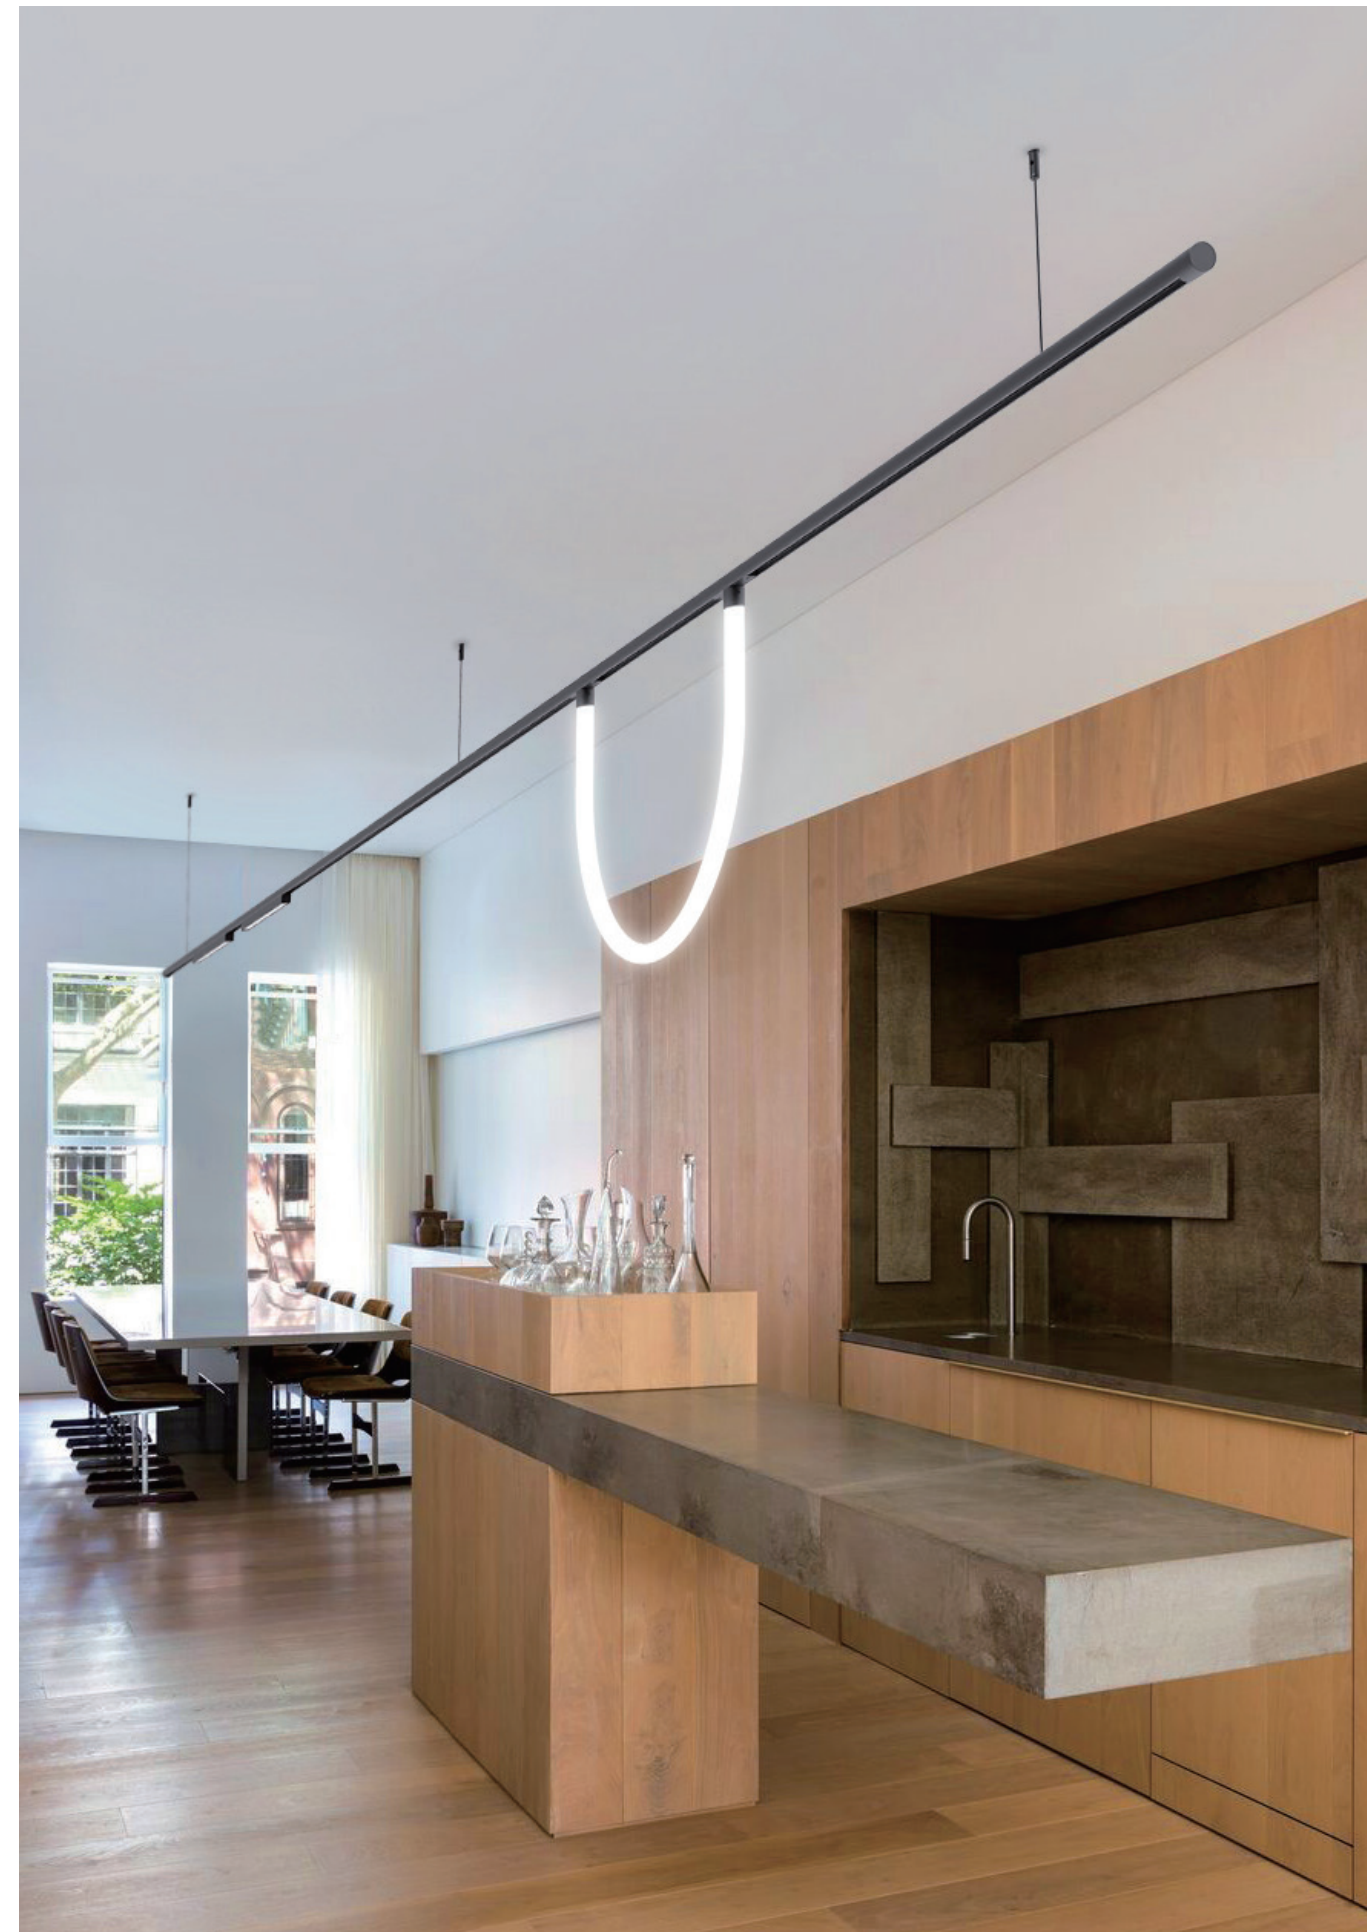


M20S-30
φ30mm (φ1.18") spotlight

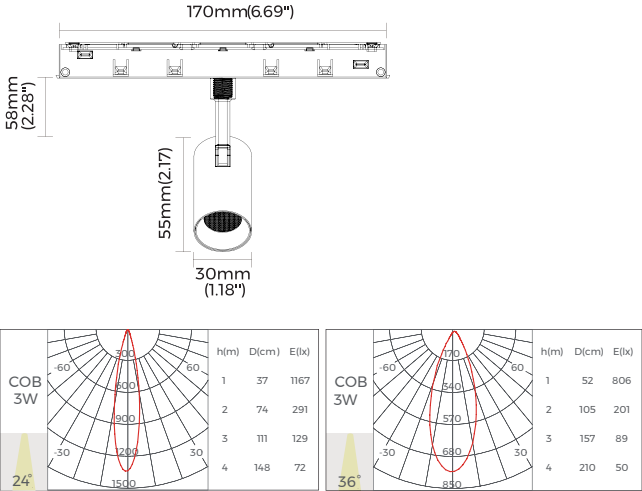

Luminaire Parameters	
Size	φ30*55mm (φ1.18"*2.17")
Diffuser	Lens
Luminous flux(lm)	225/ 225LM
Typ. power	3W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach


* The above parameters are based on Ra90, 4000K light source.

M20S-42
φ42mm (φ1.65") spotlight

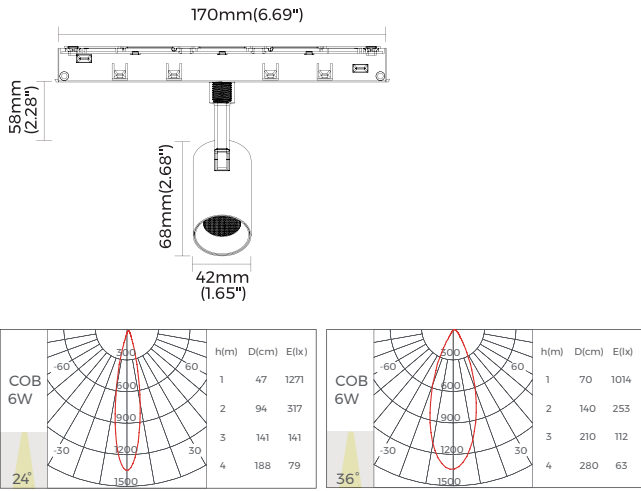

Luminaire Parameters	
Size	φ42*68mm (φ1.65"*2.68")
Diffuser	Lens
Luminous flux(lm)	400/ 500LM
Typ. power	6W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach


M20S-52
φ52mm (φ2.05") spotlight

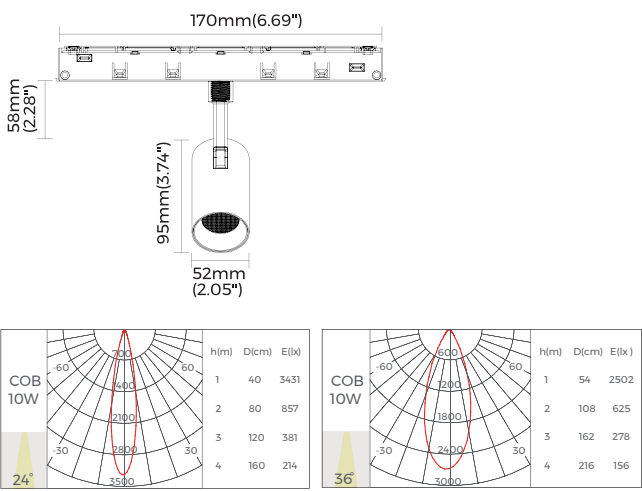

Luminaire Parameters	
Size	φ52*95mm (φ2.05"*3.74")
Diffuser	Lens
Luminous flux(lm)	820/ 880LM
Typ. power	10W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K light source.


M20S-62
φ62mm (φ2.05") spotlight

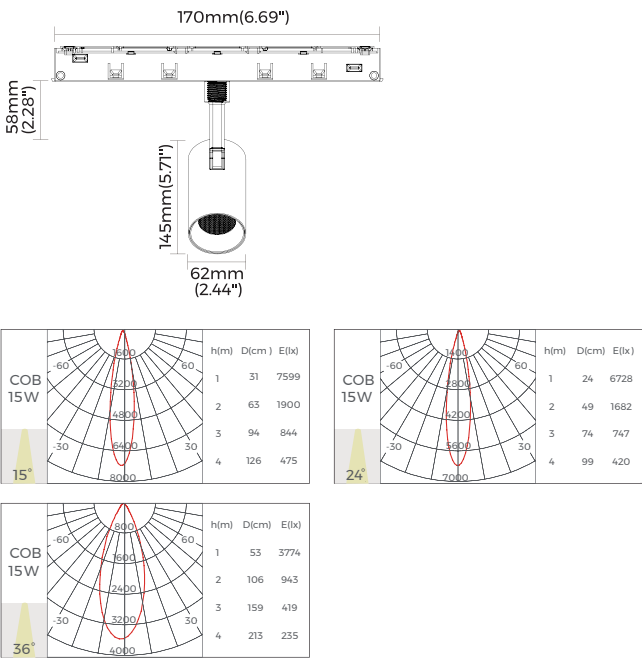

Luminaire Parameters	
Size	φ62*145mm (φ2.44"*5.71")
Diffuser	Lens
Luminous flux(lm)	1230/ 1155/ 1275LM
Typ. power	15W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	15° / 24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

M20SZ-45

spotlightφ45mm (φ1.77") zoom spotlight

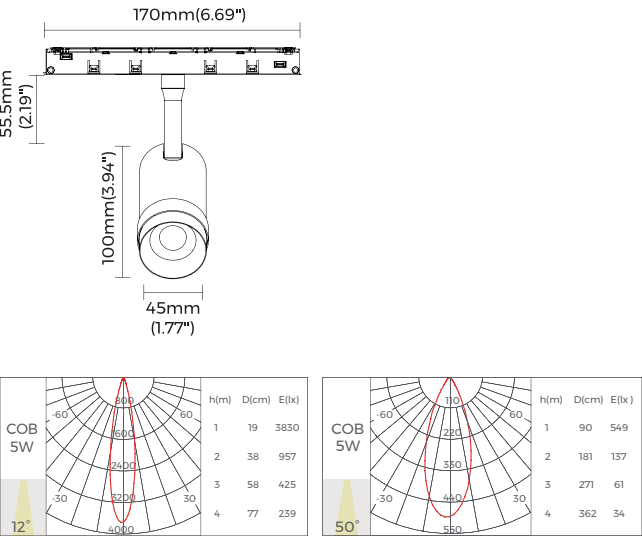


Luminaire Parameters	
Size	φ45*100mm (φ1.77"*3.94")
Diffuser	Lens
Luminous flux(lm)	250LM
Typ. power	5W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	12° -50°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black 
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K light source.

M20SZ-55


φ55 (φ2.17") mm zoom spotlight

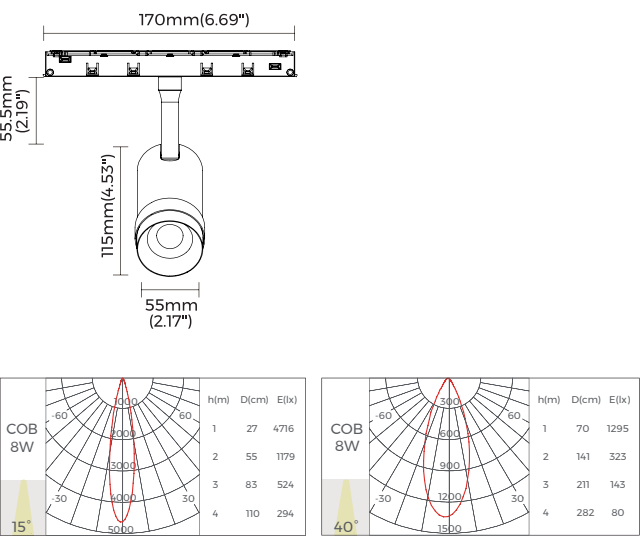

Luminaire Parameters	
Size	φ55*115mm (φ2.17"*4.53")
Diffuser	Lens
Luminous flux(lm)	500LM
Typ. power	8W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	15° -40°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black 
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

M20SZ-65

φ65 (φ2.56") mm zoom


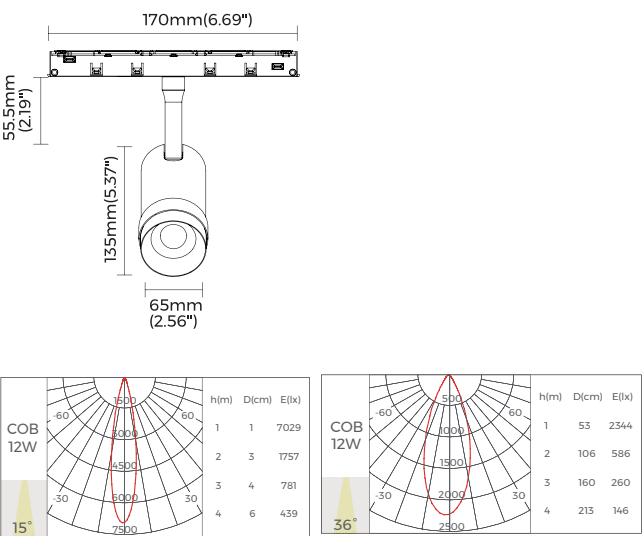


Luminaire Parameters	
Size	φ65*135mm (φ2.56"*5.37")
Diffuser	Lens
Luminous flux(lm)	700LM
Typ. power	12W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	15° -36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black 
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K light source.

M20FD

Diffuser

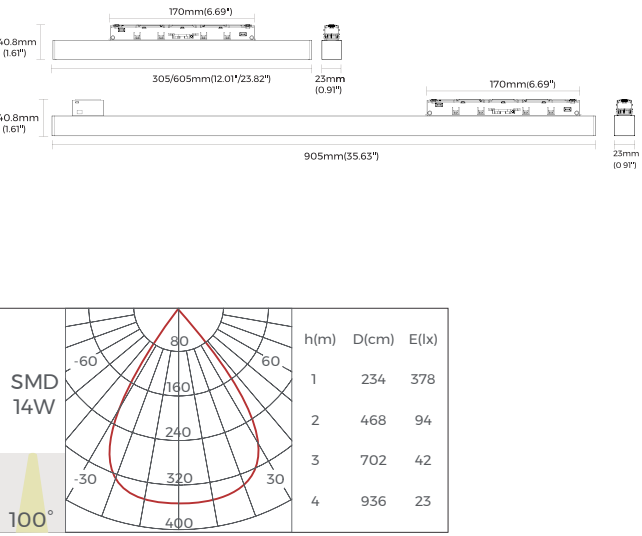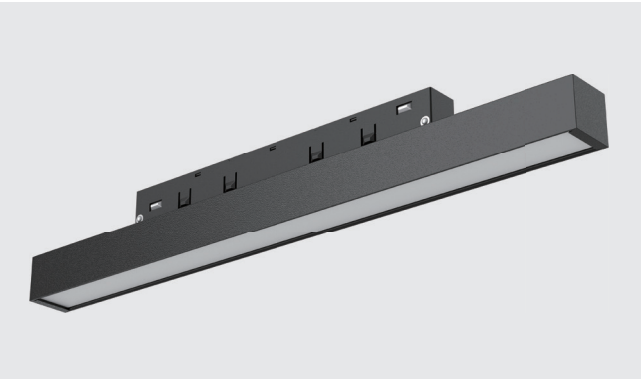

Luminaire Parameters	
Size	L305/ 605/ 905*W23*H40.8mm (12.01"/23.82"/35.63*0.91"*1.61")
Diffuser	Diffuser
Luminous flux(lm)	490/ 980/ 1400LM
Typ. power	7W/ 14W/ 20W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	100°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black 
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K, 600MM light source.

M20FP
Prismatic

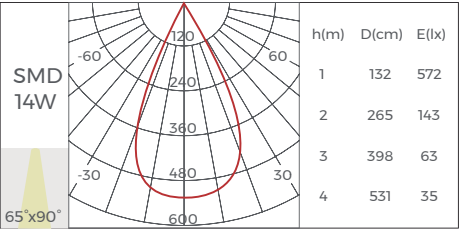
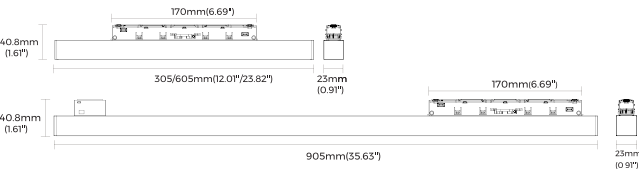
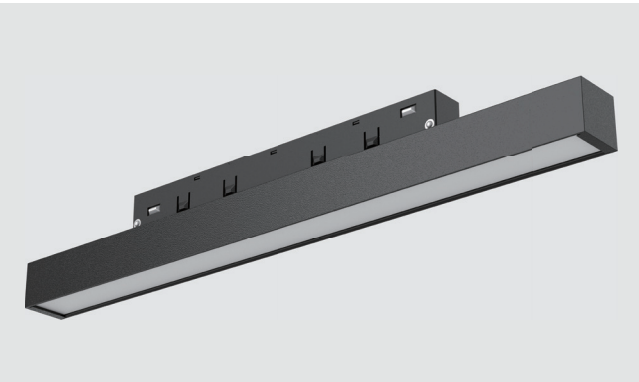


Table with 2 columns: Parameter and Value. Rows include Luminaire Parameters (Size, Diffuser, Luminous flux, Typ. power, CCT, CRI, Beam angle, Input voltage, Dimming, Coating, IP rating, Color tolerance, Intallation, Warranty, Certification).

* The above parameters are based on Ra90, 4000K, 600MM light source.

M20LA
Asymmetric

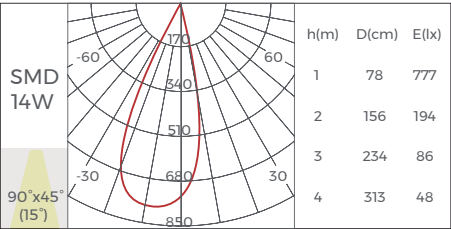
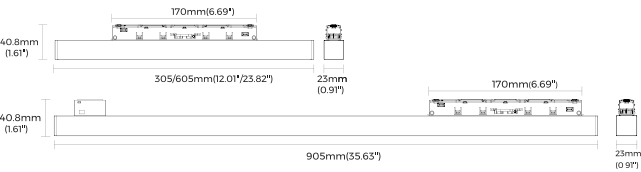
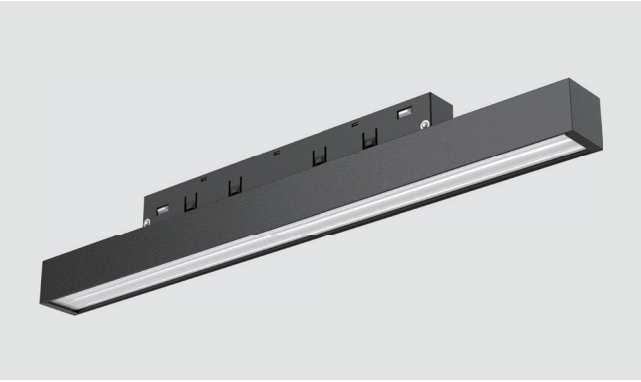


Table with 2 columns: Parameter and Value. Rows include Luminaire Parameters (Size, Diffuser, Luminous flux, Typ. power, CCT, CRI, Beam angle, Input voltage, Dimming, Coating, IP rating, Color tolerance, Intallation, Warranty, Certification).

M20LS
Double Asymmetric

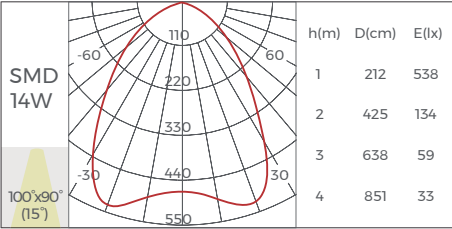
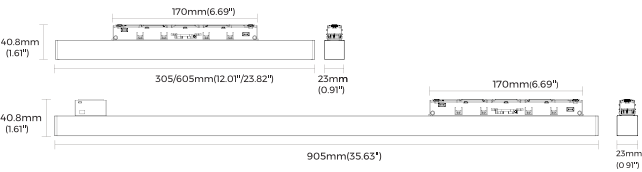
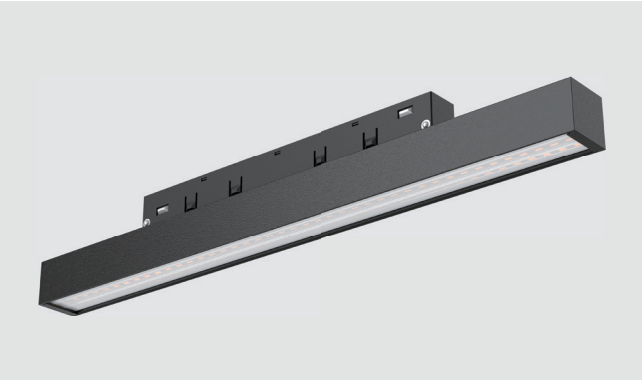


Table with 2 columns: Parameter and Value. Rows include Luminaire Parameters (Size, Diffuser, Luminous flux, Typ. power, CCT, CRI, Beam angle, Input voltage, Dimming, Coating, IP rating, Color tolerance, Intallation, Warranty, Certification).

* The above parameters are based on Ra90, 4000K, 600MM light source.

M20G
Grating






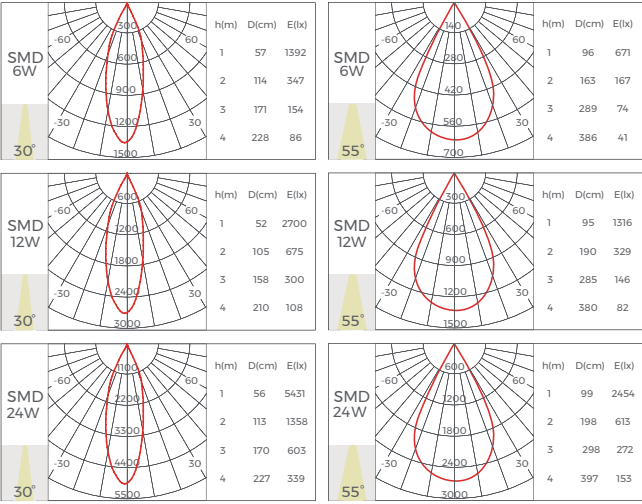


Table with 2 columns: Parameter and Value. Rows include Luminaire Parameters (Size, Diffuser, Luminous flux, Typ. power, CCT, CRI, Beam angle, Input voltage, Dimming, Coating, IP rating, Color tolerance, Intallation, Warranty, Certification).

* The above parameters are based on Ra90, 4000K light source.

M20G(A)

Grating

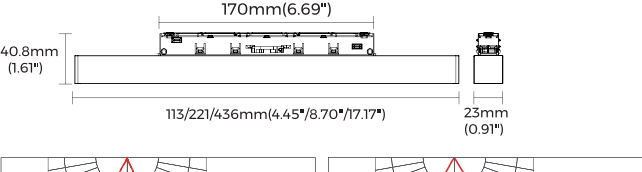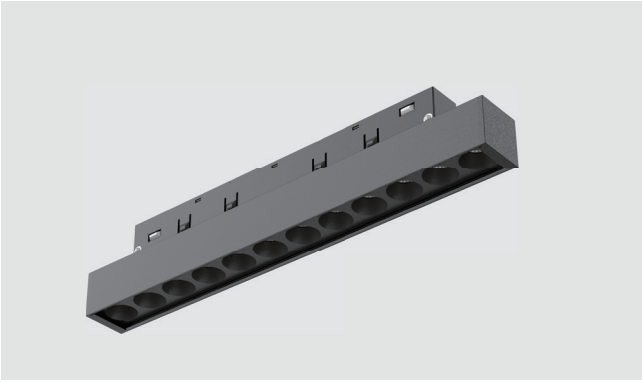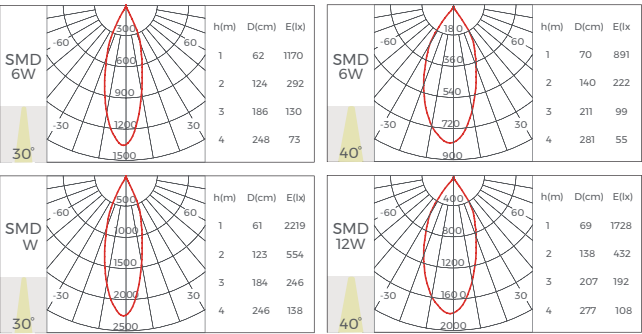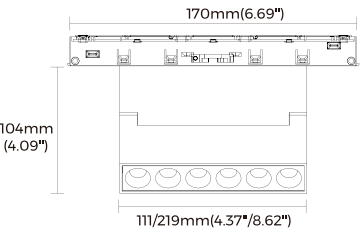
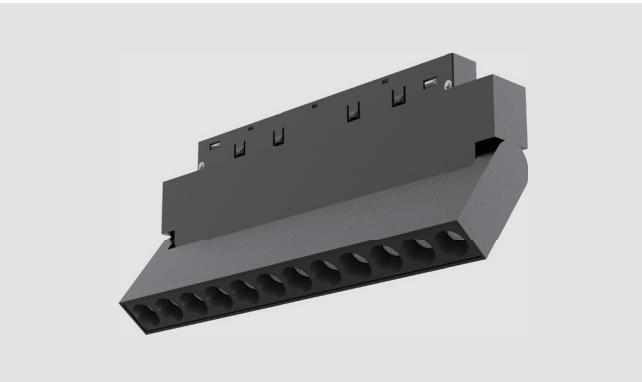


Luminaire Parameters	
Size	L111/ 219*W22.3*H104mm(4.37"/8.62"*0.88"*4.09")
Diffuser	Grating
Luminous flux(lm)	420/ 400LM840/ 800LM
Typ. power	6W12W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	30° / 40°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K light source.

M20GW

Wall washer

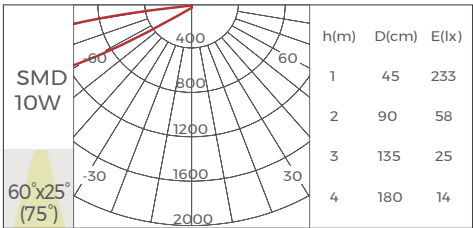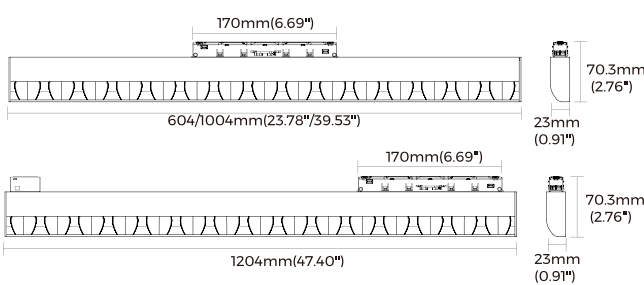


Luminaire Parameters	
Size	L604/ 1004/ 1204*W23*H53mm (23.78"/39.53"/47.40"*0.91"*2.09")
Diffuser	Lens
Luminous flux(lm)	900/ 1350/ 1800LM
Typ. power	10W/ 15W/ 20W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	60° x25° x75°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K ,600MM light source.

M20CD

Round tube


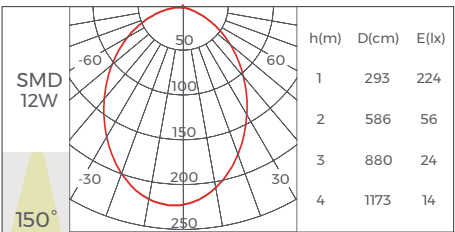


Luminaire Parameters	
Size	φ30.2*L605/905/1205mm (φ1.19"*23.82"/35.63"/47.44")
Diffuser	PC
Luminous flux(lm)	1200/ 1800/ 2400LM
Typ. power	12W/ 18W/ 24W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	150°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

* The above parameters are based on Ra90, 4000K ,600MM light source.

M20CD(A)


Corss-track round tube

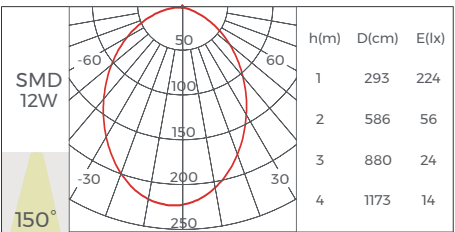

Luminaire Parameters	
Size	φ30.2*L605/905/1205mm(φ1.19"*23.82"/35.63"/47.44")
Diffuser	PC
Luminous flux(lm)	1200/ 1800/ 2400LM
Typ. power	12W/ 18W/ 24W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	150°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 3 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

M20NK-25

Round neon




Luminaire Parameters	
Size	φ25*1000/ 2500/ 5000mm (φ0.98"*39.37"/98.43"/196.85")
Diffuser	Silicone Neon
Luminous flux(lm)	910/ 2275/ 4550LM
Typ. power	14W/ 35W/ 70W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	360°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K, 1000MM light source.

M20I-30

Pendant light

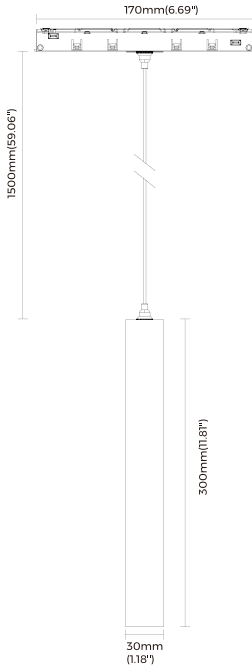


Luminaire Parameters	
Size	φ30*300mm (φ1.18"*11.81")
Diffuser	Spotlight
Luminous flux(lm)	330LM
Typ. power	5W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K, 24° light source.

M20I-50

Pendant light

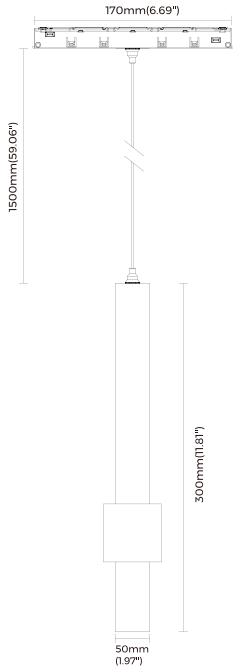


Luminaire Parameters	
Size	φ50*300mm (φ1.97"*11.81")
Diffuser	Spotlight
Luminous flux(lm)	330LM
Typ. power	5W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	24° / 36°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K, 24° light source.

M20IJ-30

Round tube pendant light

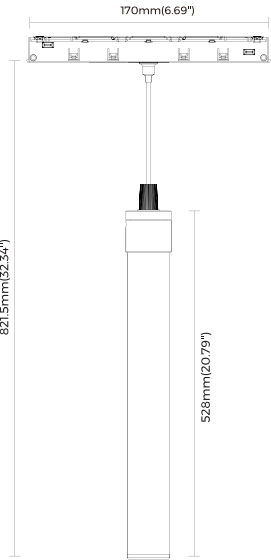

Luminaire Parameters	
Size	φ30*530mm (φ1.18"*20.87")
Diffuser	Silicone Neon rigid tube
Luminous flux(lm)	490LM
Typ. power	7W
CCT	2700/ 3000/ 3500K/ 4000K
CRI	>90
Beam angle	360°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K light source.

M20IB-100

Sphere light




Luminaire Parameters	
Size	φ100mm (φ3.94")
Diffuser	Glass
Luminous flux(lm)	500LM
Typ. power	5W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	360°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K light source.

M20IW-40

Waterdrop light

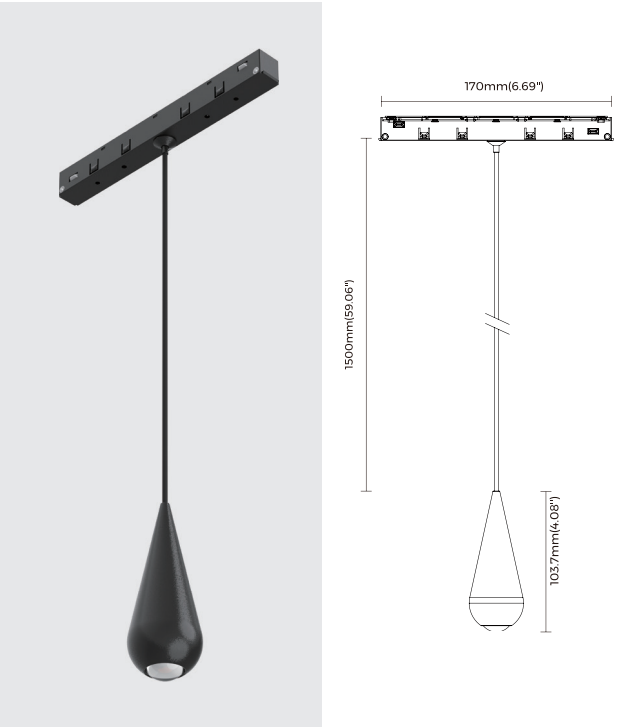

Luminaire Parameters	
Size	φ40*100mm (φ1.57"*3.94")
Diffuser	Lens
Luminous flux(lm)	280LM
Typ. power	3W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	110°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

M20SS-55

Sunset light




Luminaire Parameters	
Size	φ55*208mm (φ2.17"*8.19")
Diffuser	Lens
Luminous flux(lm)	170LM
Typ. power	3W
CCT	Colordul(1500K)
CRI	/
Beam angle	/
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	Black ●
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach

*The above parameters are based on Ra90, 4000K light source.

RNR30NK



Round neon TLS-R

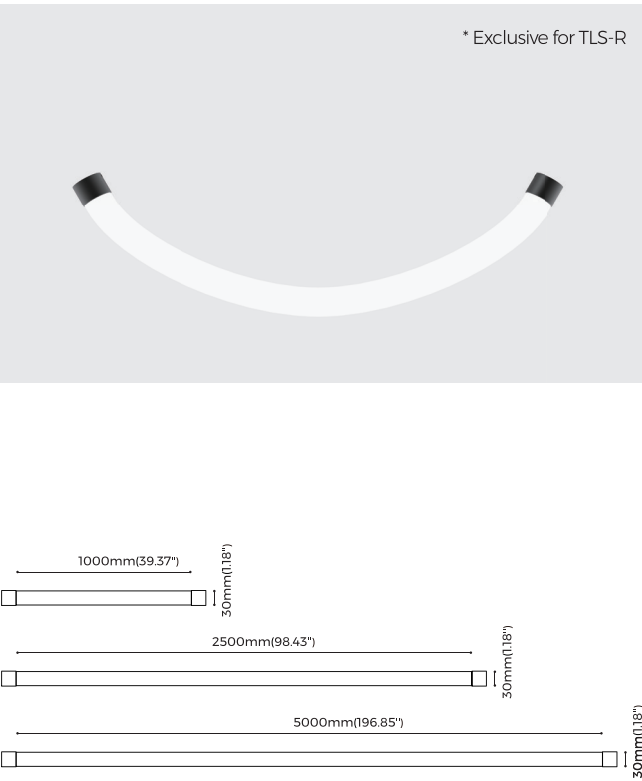

Luminaire Parameters				
Size	L1000*φ30 (39.37"*φ1.18")	L2500*φ30 (98.43"*1.18")	L5000*φ30 (196.85"* 1.18")	
Diffuser	Round neon			
Luminous flux(lm)	960LM	2380LM	4770LM	
Typ. power	14W	35W	70W	
CCT	2700K/ 3000K/ 4000K			
CRI	>90			
Beam angle	360°			
Input voltage	48VDC			
Dimming	Non/ DALI-2/ Tuya/ CASAMBI			
Coating	Black			
IP rating	IP20			
Color tolerance	SDCM< 5 step			
Intallation	Pendant/ Surface-mounted			
Warranty	3 years			
Certification	CE/ UKCA/ Rohs/ Reach			

RNR30NJ

Round tube

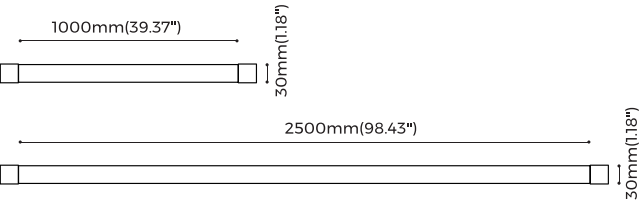
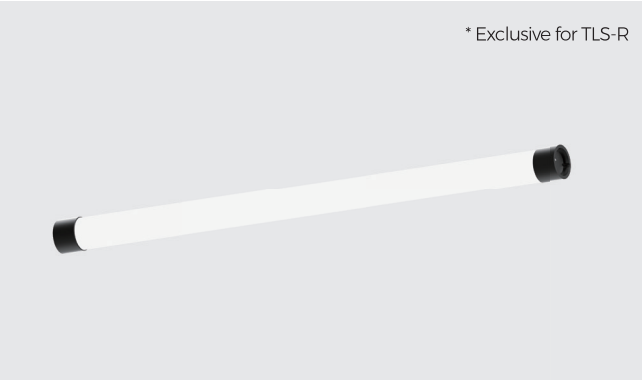


Luminaire Parameters		
Size	L1000*φ30 (39.37"*φ1.18")	L2500*φ30 (98.43"*φ1.18")
Diffuser	Round tube	
Luminous flux(lm)	940LM	2340LM
Typ. power	14W	35W
CCT	2700K/ 3000K/ 4000K	
CRI	>90	
Beam angle	360°	
Input voltage	48VDC	
Dimming	Non/ DALI-2/ Tuya/ CASAMBI	
Coating	Black●	
IP rating	IP20	
Color tolerance	SDCM< 5 step	
Intallation	Pendant/ Surface-mounted	
Warranty	3 years	
Certification	CE/ UKCA/ Rohs/ Reach	

*The above parameters are based on Ra90, 4000K ,1000MM light source.


M20NK-27

Square recessed neon

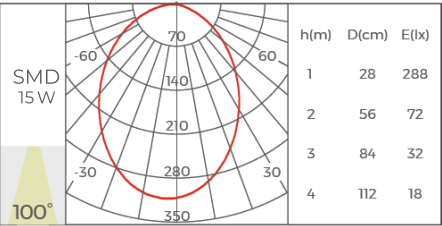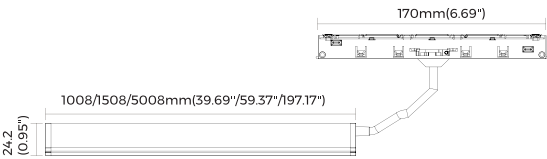

Luminaire Parameters	
Size	L1008/ 1508/ 5008*W26.6"H24.2mm (39.69"/59.37"/197.17"*1.05"*0.95")
Diffuser	Silicone Neon
Luminous flux(lm)	450/ 630/ 2160LM
Typ. power	10W/ 14W/ 48W
CCT	2700K/ 3000K/ 4000K
CRI	>90
Beam angle	110°
Input voltage	48VDC
Dimming	Non/ DALI-2/ Tuya/ CASAMBI
Coating	White(Neon)○
IP rating	IP20
Color tolerance	SDCM< 5 step
Intallation	Track mounted
Warranty	3 years
Certification	CE/ UKCA/ Rohs/ Reach


Accessory for TLS-R

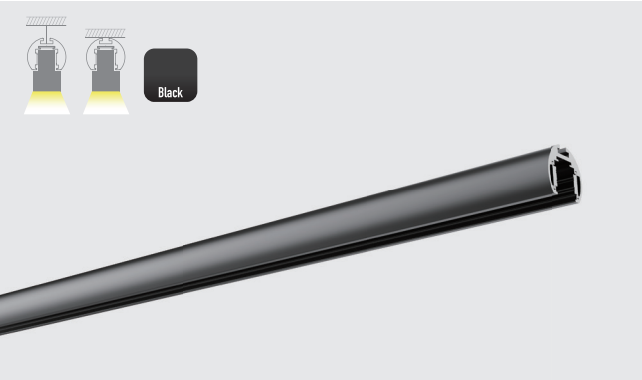

Product parameters	
Installation	Pendant / Ceiling
Input voltage	48VDC
Maximum load	350W
Length of track	TLS-R6X0 (X: 1/ 2/ 3m) (39.37"/78.74"/118.11")
Appearance	Black●
Certification	CE/ UKCA/ Rohs/ Reach

Installation Accessories		
Pendant cable (Track)	PN-D	
Pendant cable (Neon)	TLS-R892	
Pendant rod (Track)	PG-I	
Pendant rod (Neon)	TLS-R893	
Ceiling accessories (Neon)	CL-18	
Ceiling screw (Track)	CL-21	

Electrical connection Accessories		
Power feeder of track	TLS-R862(N)	
Female end cap	TLS-R865	
End cap	TLS-R600	

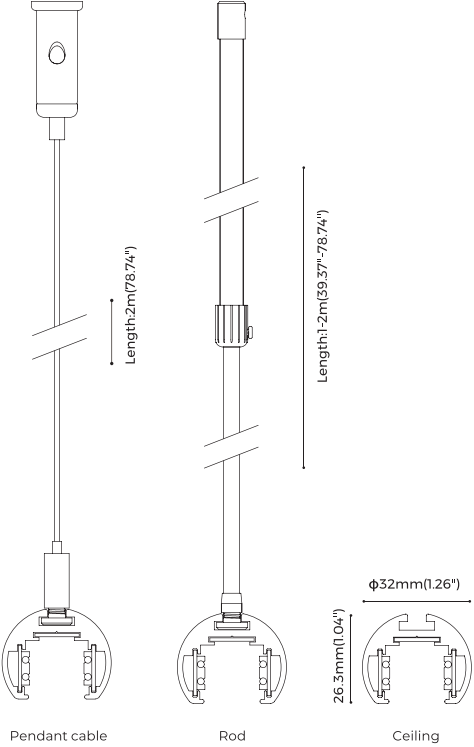


Interconnection Accessories		
Turned connector	TLS-R860	
Straight connector (Without Wire locker)	TLS-R861	
I-shaped electrical connector 180°splicing bar	TLS-R863(N)	

Power supply		
100W Power supply	LV100W24CG2	
150W Power supply	LV150W24CG2	
250W Power supply	LV250W24CG2	

Accessory for TLSE-M20

Straight Track


Ceiling / Pendant track

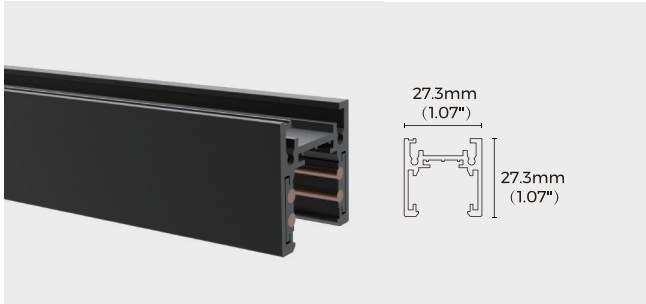

TLS-MS2X0 (X: 1 / 2 / 3 M(39.37"/78.74"/118.11")



Installation: Ceiling / Pendant
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 27.3×27.3×1000/2000/3000mm (1.07"×1.07"×39.37"/78.74"/118.11")

Trimless recessed track

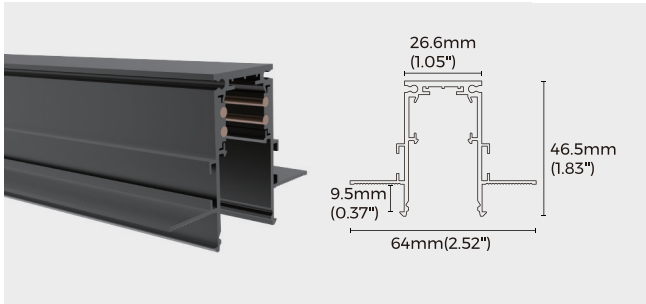


TLS-MR2X0(A) (X: 1 / 2 / 3 M(39.37"/78.74"/118.11")
9.5mm gypsum board

Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 64×46.5×1000/2000/3000mm (2.52"×1.83"×39.37"/78.74"/118.11")

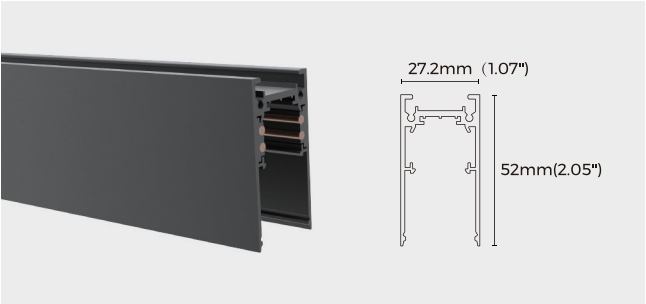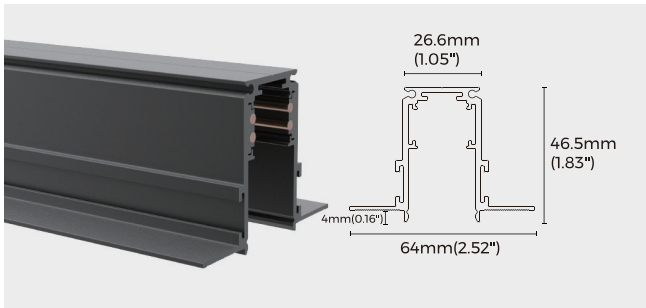

TLS-MH2X0 (X: 1 / 2 / 3 M(39.37"/78.74"/118.11")

Installation: Ceiling / Pendant
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 27.2×52×1000/2000/3000mm (1.07"×2.05"×39.37"/78.74"/118.11")

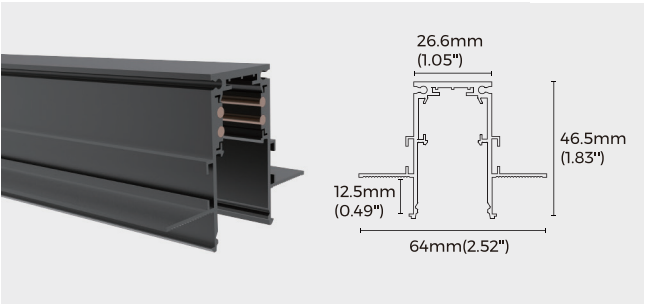

TLS-MR2X0(B) (X: 1 / 2 / 3 M(39.37"/78.74"/118.11")
12.5mm gypsum board


Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 64×46.5×1000/2000/3000mm (2.52"×1.83"×39.37"/78.74"/118.11")

TLS-MR2X0(C) (X: 1 / 2 / 3 M(39.37"/78.74"/118.11")
plastered


Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 64×46.5×1000/2000/3000mm (2.52"×1.83"×39.37"/78.74"/118.11")

Curve track


Ceiling / Pendant track

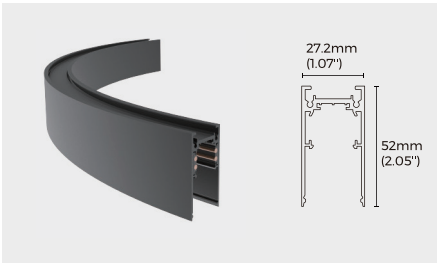

TLS-MH208A90
Installation: Ceiling / Pendant
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 27.2×52×Φ800mm(1.07"×2.05"×Φ31.50"), 90°

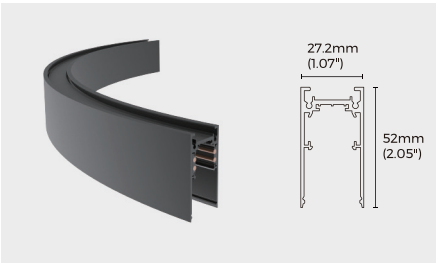


TLS-MH210A90
Installation: Ceiling / Pendant
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 27.2×52×Φ1000mm (1.07"×2.05"×Φ39.37"), 90°

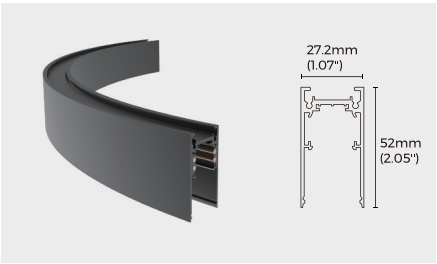


TLS-MH212A90
Installation: Ceiling / Pendant
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 27.2×52×Φ1200mm(1.07"×2.05"×Φ47.24"), 90°


Trimless track (9.5mm(0.37") gypsum board)

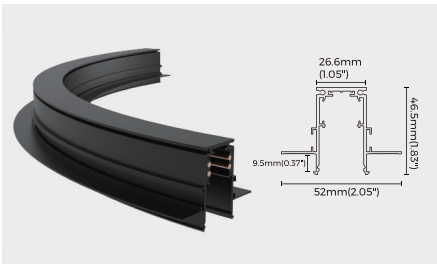

TLS-MR208A90(A)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ800mm(2.05"×1.83"×Φ31.50"), 90°

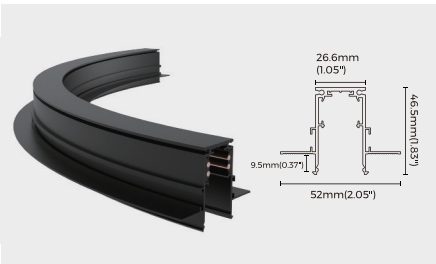


TLS-MR210A90(A)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ1000mm(2.05"×1.83"×Φ39.37"), 90°

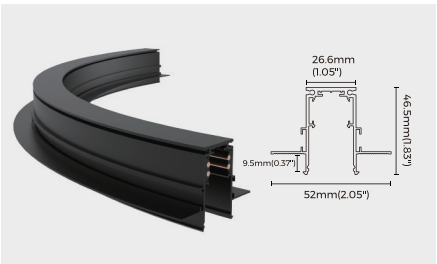


TLS-MR212A90(A)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ1200mm(2.05"×1.83"×Φ47.24"), 90°


Trimless track (12.5mm gypsum board)

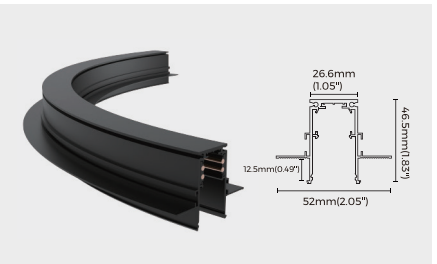

TLS-MR208A90(B)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ800mm(2.05"×1.83"×Φ31.50"), 90°

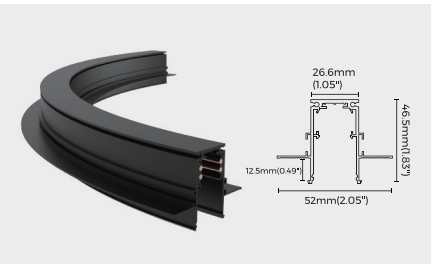

TLS-MR210A90(B)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ1000mm(2.05"×1.83"×Φ39.37"), 90°

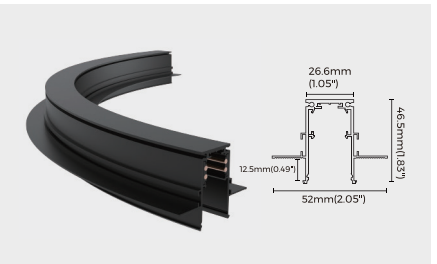

TLS-MR212A90(B)
Installation: Trimless recessed
Material: AL6063-T5
Coating: Black
Rated current: 7A
Maximum load: 350W
Input voltage: DC48V
Size: 52×46.5×Φ1200mm, (2.05"×1.83"×Φ47.24")90°

Track accessories

Electrical connection accessory



Power feeder of track
Model: TLS-M261
Size: L147×W19×H17.3mm
(5.79""0.75""0.68")
Applicable model: All staight track



I-shaped electrical connector (recessed type)
Model: TLS-M262
Size: L70×W11.5×H2.1mm(Splicing bar)
(2.76""0.45""0.08")
L138×W18×H18mm(Power feeder)
(5.43""0.71""0.71")
Applicable model: TLS-MR2X0(A)
TLS-MR2X0(B)
TLS-MR2X0(C)



I-shaped electrical connector (Surface)
Model: TLS-M263
Size: L55×W22×H4.3mm(Splicing bar)
(2.16""0.87""0.17")
L138×W18×H18mm(Power feeder)
(5.43""0.71""0.71")
Applicable model: TLS-MS2X0
TLS-MH2X0



Electrical connector
Model: TLS-M264
Size: L147×W19×H17.3mm
(5.79""0.75""0.68")
Applicable model:
All staight track corner



I-shaped electrical connector (recessed type)
Model: TLS-M265
Size: L70×W11.5×H2.1mm(Splicing bar)
(2.76""0.45""0.08")
L78×W19×H17mm(Power feeder)
(3.07""0.75""0.67")
Applicable model: TLS-MR2X0A
TLS-MR2X0B
TLS-MR2X0C



I-shaped electrical connector (Surface)
Model: TLS-M266
Size: L55×W22×H4.3mm(Splicing bar)
(2.17""0.87""0.17")
L78×W19×H17mm(Power feeder)
(3.07""0.75""0.67")
Applicable model: TLS-MS2X0
TLS-MH2X0

End cap



Model: EC-MH20
Material: Aluminum
Size: L52×W27.2×H5.5mm
(2.05""1.07""0.22")
Applicable model: TLS-MH2X0



Model: EC-MR20
Material: Aluminum
Size: L46.5×W27.5×H5.5mm
(1.83""1.07""0.22")
Applicable model: TLS-MR2X0(A)
TLS-MR2X0(B)
TLS-MR2X0(C)



Model: EC-MS20
Material: Aluminum
Size: L27.6×W27.5×H2.5mm
(1.09""1.09""0.10")
Applicable model: TLS-MS2X0

Intallation accessory



Track bind cover
Model: CV-M20FB
Material: PVC
Size: L1000×W25.7×H5.6mm
(39.37""1.01""0.22")
Applicable model: All staight track



Ceiling accessory
Model: TLS-M271
Material: SPCC
Size: L67.5×W31.5×H7.5mm
(2.66""1.24""0.30")
Applicable model: TLS-MS2X0
TLS-MH2X0



Pendant accessory
Model: TLS-M272
Material: SPCC
Size: L30×W22×H4.3mm
(1.18""0.87""0.17")
Applicable model: TLS-MS2X0
TLS-MH2X0



Ceiling screw
Model: CL-01
Material: Fe
Size: M3.5×40mm
(0.14""1.57")
Applicable model: TLS-MR2X0(A)
TLS-MR2X0(B)
TLS-MR2X0(C)

Power supply



Magnetic power
Model: JLY-EMC-20-100W48
Size: L265×W22×H44mm
(10.43""0.87""1.73")
Input voltage: 220-240VAC
Output: DC48V
Power: 100W
Applicable model: All staight track



Magnetic power
Model: JLY-EMC-20-200W48
Size: L365×W22×H44mm
(14.37""0.87""1.73")
Input voltage: 220-240VAC
Output: DC48V
Power: 200W
Applicable model: All staight track




Power supply
Model: BN-V48-100P
Size: L350×W30×H18mm
(13.78""1.18""0.71")
Input voltage: 220-240VAC
Output: DC48V
Power: 100W
Applicable model: All track



Power supply
Model: BN-V48-250P
Size: L400×W40×H22mm
(15.75""1.57""0.87")
Input voltage: 220-240VAC
Output: DC48V
Power: 250W
Applicable model: All track

Corner accessory

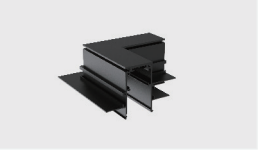

L-shaped (Downward)
Model: L90-MR20(A)
Material: AL6063-T5
Size: L95×W95×H46.5mm
(3.74""3.74""1.83")
Applicable model: TLS-MR2X0(A)



L-shaped (Inward)
Model: L90N-MR20(A)
Material: AL6063-T5
Size: L80×W80×H64mm
(3.15""3.15""2.52")
Applicable model: TLS-MR2X0(A)



L-shaped (Downward)
Model: L90-MR20(B)
Material: AL6063-T5
Size: L95×W95×H46.5mm
(3.74""3.74""1.83")
Applicable model: TLS-MR2X0(B)



L-shaped (Inward)
Model: L90N-MR20(B)
Material: AL6063-T5
Size: L80×W80×H64mm
(3.15""3.15""2.52")
Applicable model: TLS-MR2X0(B)



L-shaped (Downward)
Model: L90-MR20(C)
Material: AL6063-T5
Size: L95×W95×H46.5mm
(3.74""3.74""1.83")
Applicable model: TLS-MR2X0(C)



L-shaped (Inward)
Model: L90N-MR20(C)
Material: AL6063-T5
Size: L80×W80×H64mm
(3.15""3.15""2.52")
Applicable model: TLS-MR2X0(C)



L-shaped (Downward)
Model: L90-MS20
Material: AL6063-T5
Size: L50×W50×H27.3mm
(1.97""1.97""1.07")
Applicable model: TLS-MS2X0



L-shaped (Inward)
Model: L90N-MS20
Material: AL6063-T5
Size: L50×W50×H27.3mm
(1.97""1.97""1.07")
Applicable model: TLS-MS2X0



L-shaped (Downward)
Model: L90-MH20
Material: AL6063-T5
Size: L50×W50×H52mm
(1.97""1.97""2.05")
Applicable model: TLS-MH2X0



L-shaped (Inward)
Model: L90N-MH20
Material: AL6063-T5
Size: L80×W80×H27.2mm
(3.15""3.15""1.07")
Applicable model: TLS-MH2X0



L-shaped Adjustable (Downward)
Model: L90-MH20(A)
Material: AL6063-T5
Size: L120×W27.2×H52mm
(4.72""1.07""2.05")
Applicable model: TLS-MH2X0



T-shaped Adjustable (Downward)
Model: T90-MH20(A)
Material: AL6063-T5
Size: L120×W60×H52mm
(4.72""2.36""2.05")
Applicable model: TLS-MH2X0



X-shaped Adjustable (Downward)
Model: X90-MH20(A)
Material: AL6063-T5
Size: L120×W120×H52mm
(4.72""4.72""2.05")
Applicable model: TLS-MH2X0



CASAMBI Control
Model: I200EN1812-CAS-W0-BLDAV48
Size: 142.6×18×58.1mm
(5.61""0.71""2.29")
Input voltage: 48VDC
Output signal: DALI
Output DALI Max.current: 180mA
Control devices: ≤64

Control groups: ≤8
Certification: CE, UKCA
Others: Controller should be used with DALI dimming modules.



HOLA ^{NEW}

HOLA refers to a 48V flexible recessed system that can realize re-use of product. It allows different optical modules to be flexibly integrated into ceiling and moved or replaced arbitrarily at ease thanks to their standardized mounting interface, satisfying your diversified design requirements and meanwhile achieving easy replacement of lights at low costs. The bases of modules are designed to fit perfectly into ceiling, calm and concise in look.

Product Overview

Spotlights

Decorative Lights

Linear Lights



HM40S-30



HM40S-42



HM40S-52



HM40S-62



HM40SZ-45



HM40SZ-55



HM40SZ-65



HR40S-29



HS40I-30



HS40I-50



HS40IJ-30



HS40IB-100



HS40IW-40



HM40SS-55



HM40NK



HM40GW



HM40CD



HM40FD



HM40FP



HM40G



HM40LA



HM40LS



HS40FD



HS40FP



HS40G



HH40FD



HH40FP



HH40G

Standardized Interface

Thanks to standardized interface, HOLA allows different modules to integrate into one system. In the future, there will be more kinds of modules included so as to bring more possibilities for space and users.



Trimless recessed




Recessed

Spotlights



Decorative Lights

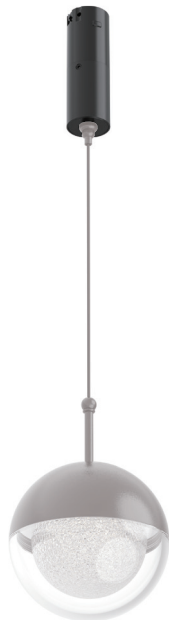

Other
Can customized
for your lighting
fixture



Easy Installation

Push to lock



Push again to unlock



Diversified Styling

HOLA relies on base as carrier of light modules, which can be adjusted at will for any design and styling while not affected by space and shapes of carrier.




Hovering adjustable

All pendant lights are available in normal and hover versions

Normal version





Hovering version

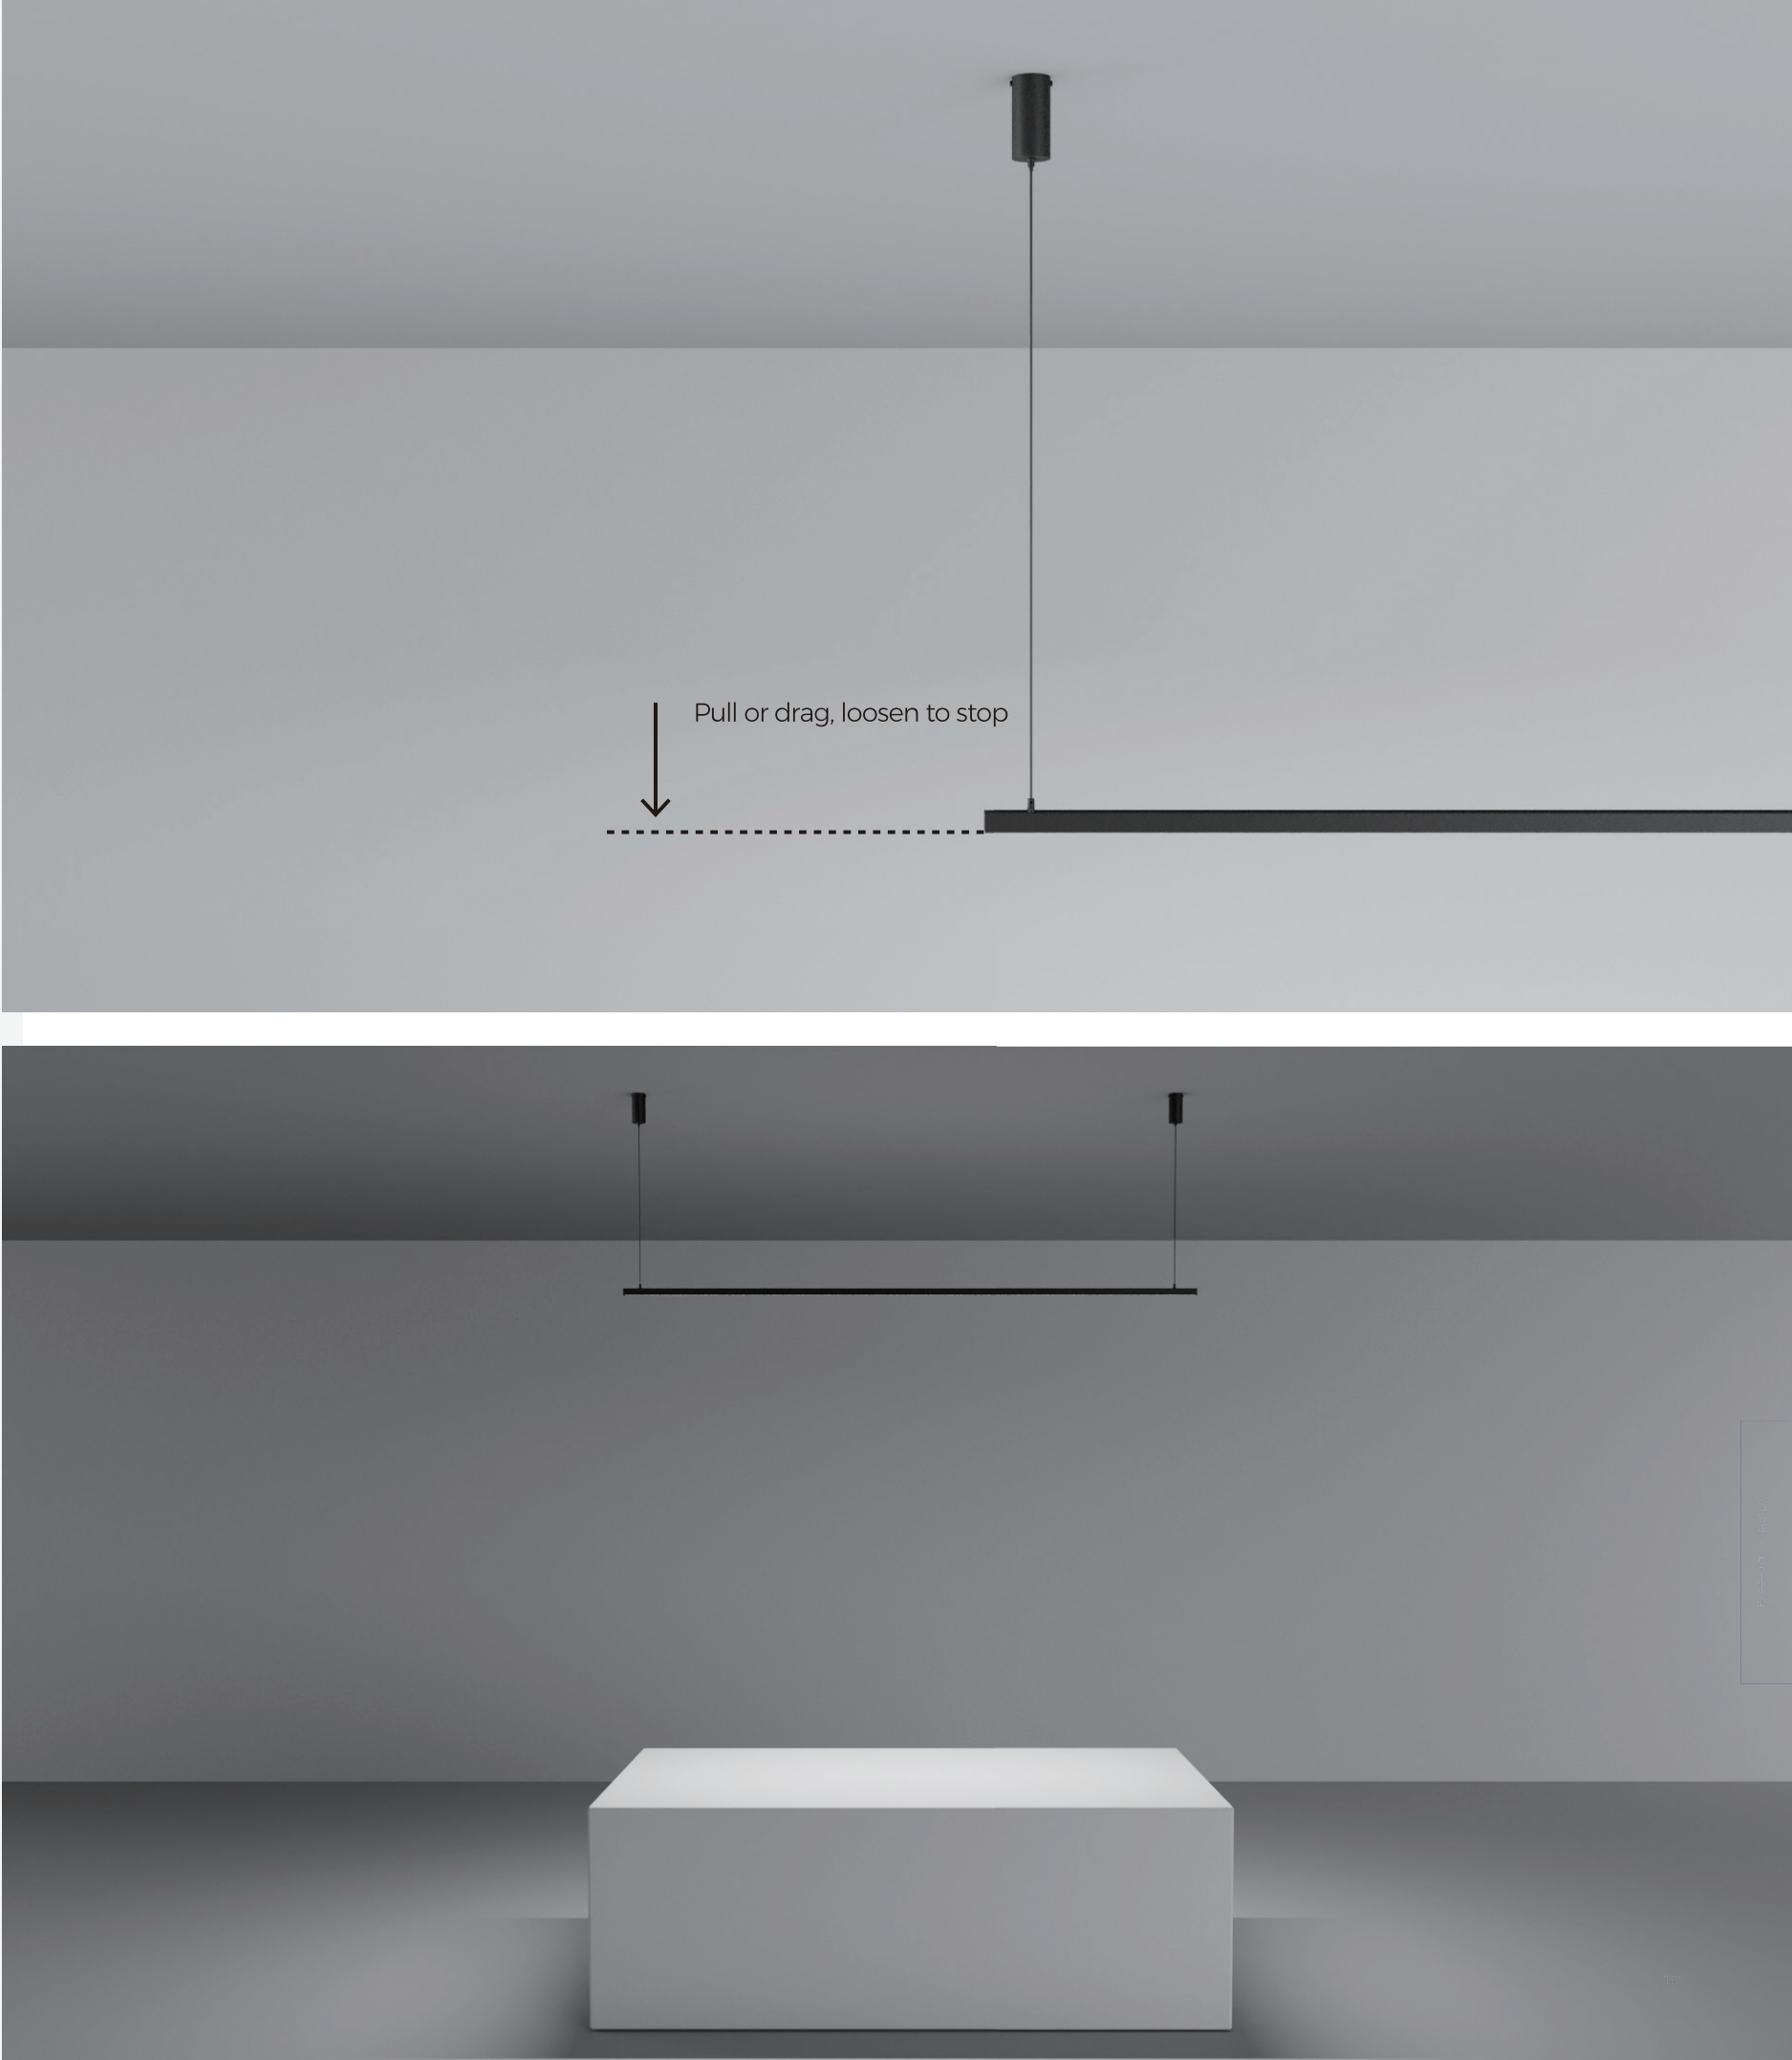



HM40S-30
Spotlight

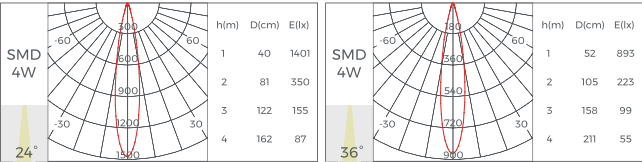
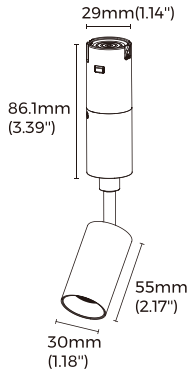


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ30×55mm(φ1.18"×2.17")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/ROHS/Reach/UKCA

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<3 Step (ANSI)
UGR	<13
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	4
Luminous flux(lm)	300
Light efficiency	75LM/W
Beam angle	24°/36°

*The above parameters are based on Ra90, 4000K, 36° light source.



HM40S-42
Spotlight

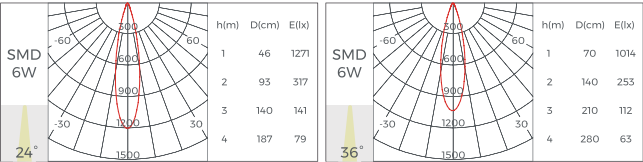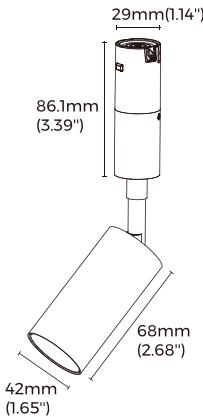

Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ42×68mm(φ1.65"×2.68")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	Reach/UKCA

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<3 Step (ANSI)
UGR	<10
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	6
Luminous flux(lm)	500
Light efficiency	83LM/W
Beam angle	24°/36°

HM40S-52
Spotlight

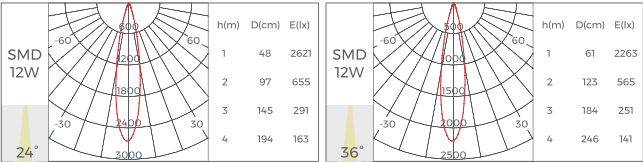
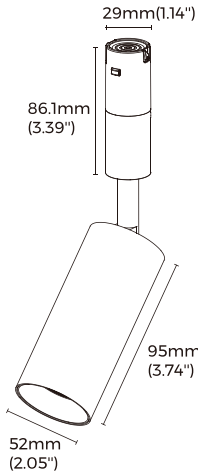


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ52×95mm(φ2.05"×3.74")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<3 Step (ANSI)
UGR	<19
CRI	>90
CCT	2700K/3000K/3500K/4000K
Power(W)	12
Luminous flux(lm)	1020
Light efficiency	85LM/W
Beam angle	24°/36°

*The above parameters are based on Ra90, 4000K, 36° light source.

HM40S-62
Spotlight

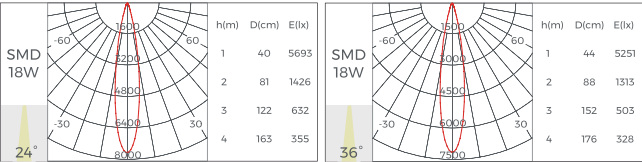
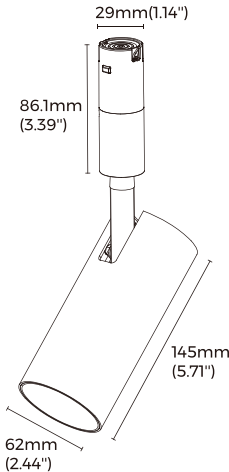


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ62×145mm(φ2.44"×5.71")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<3 Step (ANSI)
UGR	<13
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	18
Luminous flux(lm)	1080
Light efficiency	60LM/W
Beam angle	15°/24°/36

HM40SZ-45

Zoom Spotlight

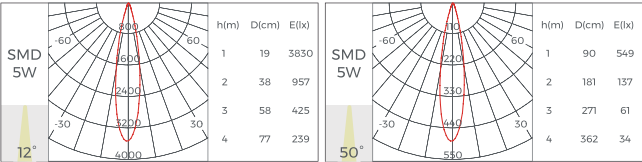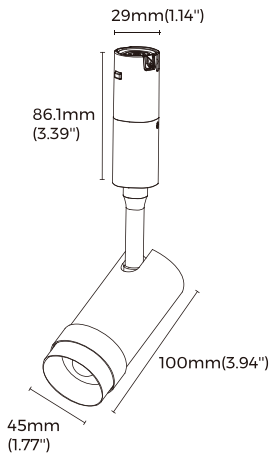



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ45×100mm(φ1.77"×3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	LEDTEEN COB
SDCM	<5 Step (ANSI)
UGR	<13
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	5
Luminous flux(lm)	250
Light efficiency	50LM/W
Beam angle	12°-50°

*The above parameters are based on Ra90, 4000K, 50° light source.

HM40SZ-55

Zoom Spotlight

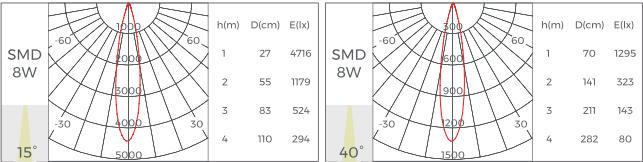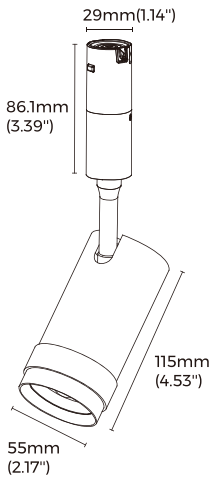



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ55×115mm(φ2.17"×4.53")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelux COB
SDCM	<3 Step (ANSI)
UGR	<13
CRI	>90
CCT	2700K/3000K/3500K/4000K
Power(W)	8
Luminous flux(lm)	500
Light efficiency	63LM/W
Beam angle	15°-40°

*The above parameters are based on Ra90, 4000K, 40° light source.

HM40SZ-65

Zoom Spotlight

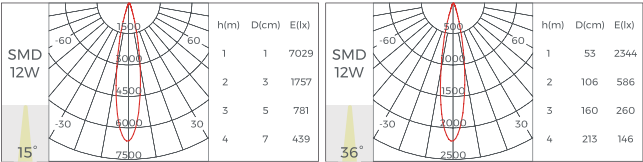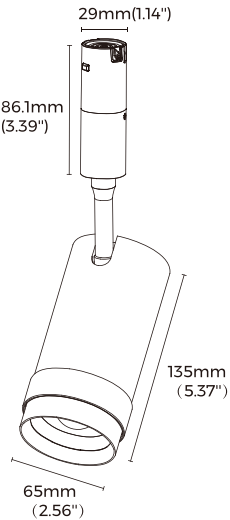



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ65×135mm(φ2.56"×5.37")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelux COB
SDCM	<3 Step (ANSI)
UGR	<13
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	12
Luminous flux(lm)	700
Light efficiency	59LM/W
Beam angle	15°-36°

*The above parameters are based on Ra90, 4000K, 36° light source.

HR40S-29

Recessed Spotlight

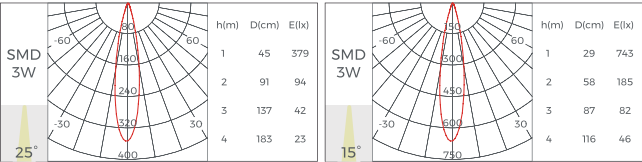



Basic Parameters	
Installation	Recessed
Opening Size	φ56mm(φ2.20")
Size	φ29×86.1mm(φ1.14"×3.39")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelux 3535
SDCM	<3 Step (ANSI)
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	3
Luminous flux(lm)	135
Light efficiency	45LM/W
Beam angle	15°/25°

*The above parameters are based on Ra90, 4000K, 15° light source.

HS40I-30 | HS40I-30(A)

Pendant light

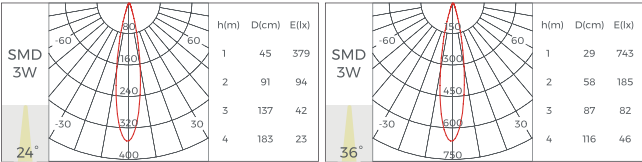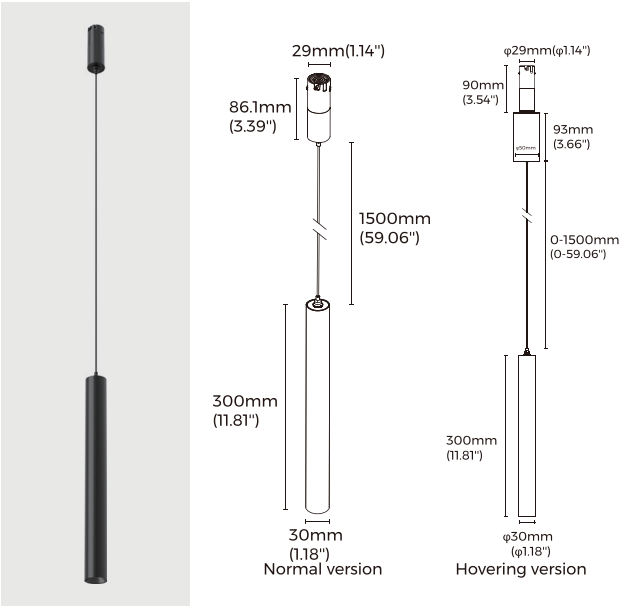



Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	φ30×300mm(φ1.18"×11.81")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<5 Step (ANSI)
UGR	<10
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	6
Luminous flux(lm)	390
Light efficiency	65LM/W
Beam angle	24°/36°

*The above parameters are based on Ra90, 4000K, 36° light source.

HS40I-50 | HS40I-50(A)

Pendant light

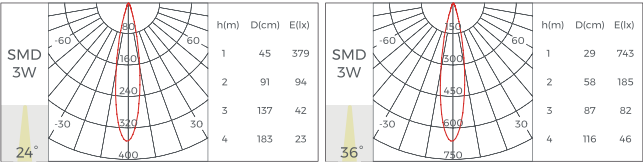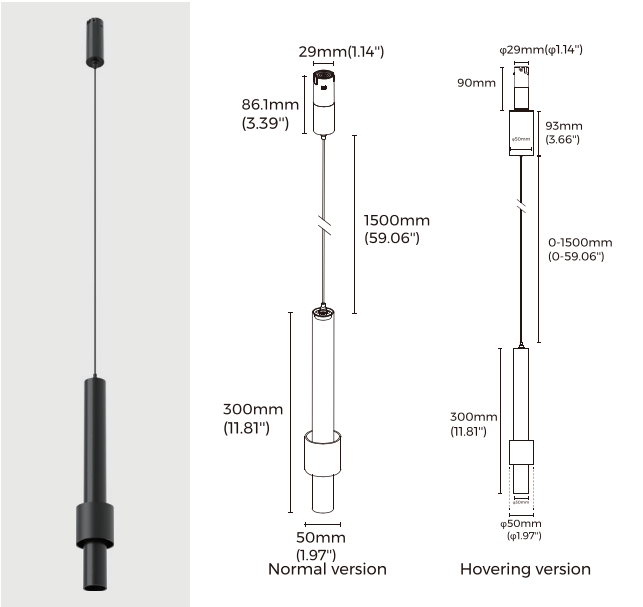


Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	φ50×300mm(φ1.97"×11.81")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix COB
SDCM	<5 Step (ANSI)
UGR	<10
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	6
Luminous flux(lm)	390
Light efficiency	65LM/W
Beam angle	24°/36°

HS40IJ-30 | HS40IJ-30(A)

Round tube pendant light

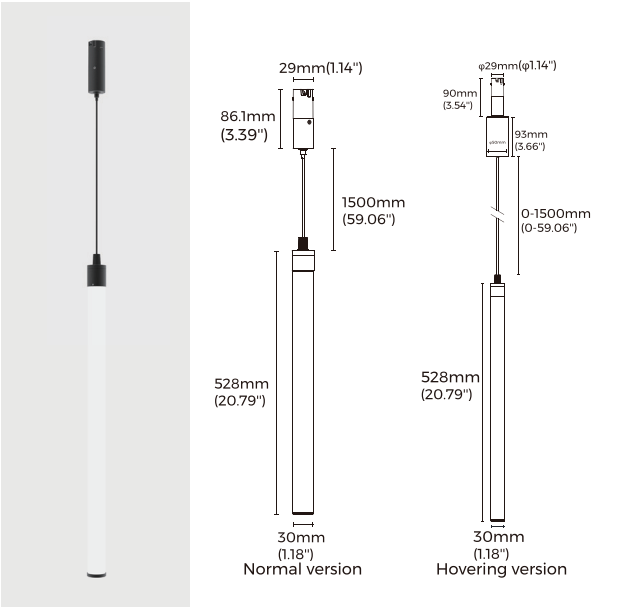


Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	φ30×528mm(φ1.18"×20.79")
Material	Silicone Neon
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix 2835
SDCM	<5 Step (ANSI)
UGR	<10
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	7
Luminous flux(lm)	490
Light efficiency	70LM/W
Beam angle	360°

*The above parameters are based on Ra90, 4000K, light source.

HS40IB-100 | HS40IB-100(A)

Sphere light

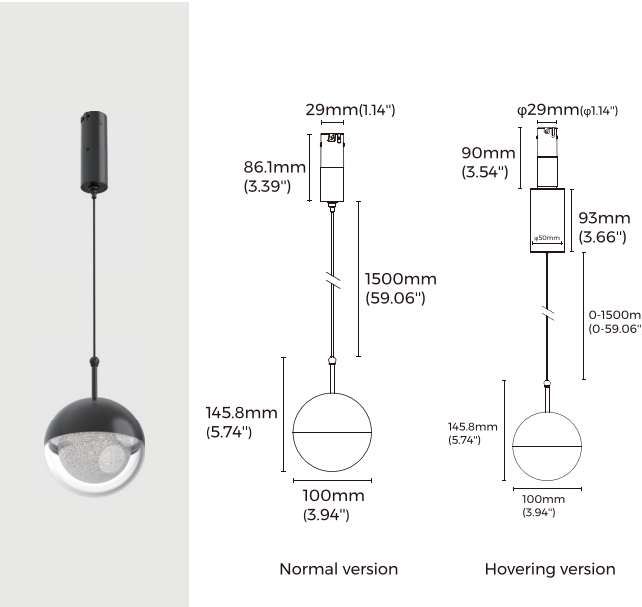


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ100mm(φ3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelix 2835
SDCM	<5 Step (ANSI)
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	6
Luminous flux(lm)	600
Light efficiency	100LM/W
Beam angle	360°

HS40IW-40 | HS40IW-40(A)

Waterdrop light

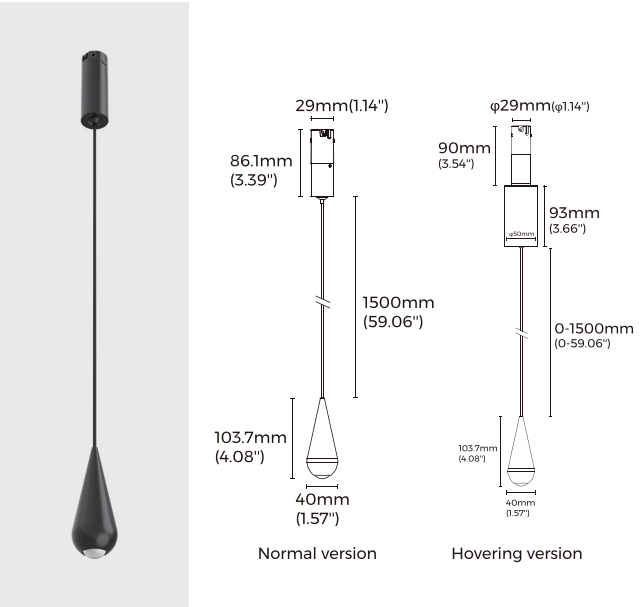


Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	φ40×100mm(φ1.57"×3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelux COB
SDCM	<5 Step (ANSI)
CRI	>90
CCT	2700K/3000K/4000K
Power(W)	4
Luminous flux(lm)	360
Light efficiency	90LM/W
Beam angle	110°

*The above parameters are based on Ra90, 4000K, light source.

HM40SS-55

Sunset light

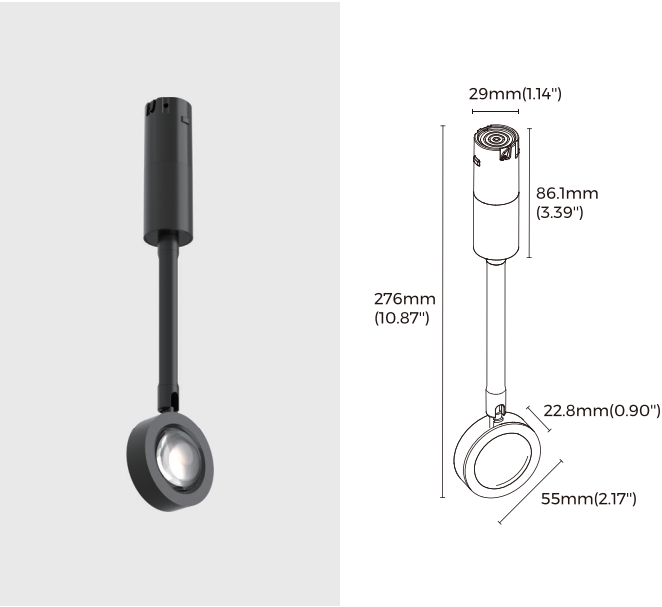


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ55×22.8mm(φ2.17"×0.90")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters	
Light source	Brigelux COB
SDCM	<5 Step (ANSI)
CRI	>90
CCT	Colorful (1500K)
Power(W)	3
Luminous flux(lm)	170
Light efficiency	57LM/W
Beam angle	110°

*The above parameters are based on Ra90, 1500K, light source.

HM40NK

Round neon

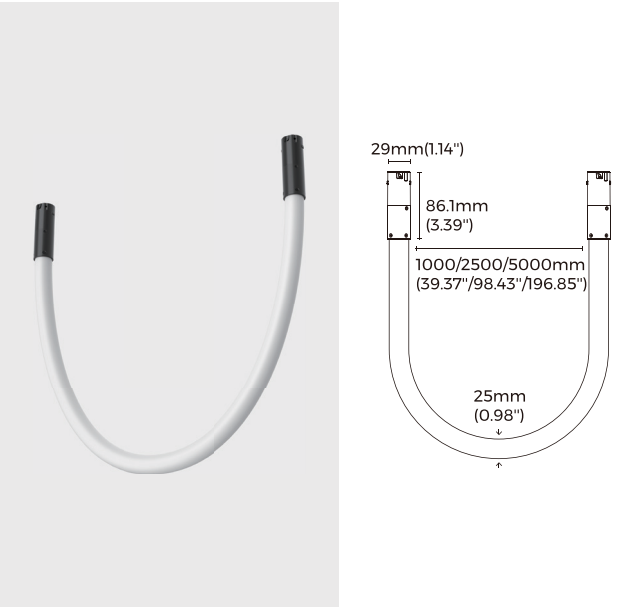



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ25×1000/2500/5000mm (φ0.98"×39.37"/98.43"/196.85")
Material	Silicone Neon
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<5 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	1000(39.37")	2500(98.43")	5000(196.85")
Power(W)	14	35	70
Luminous flux(lm)	1050	2625	5250
Light efficiency	75LM/W		
Beam angle	360°		

*The above parameters are based on Ra90, 4000K, light source.

HM40GW

Wall washer


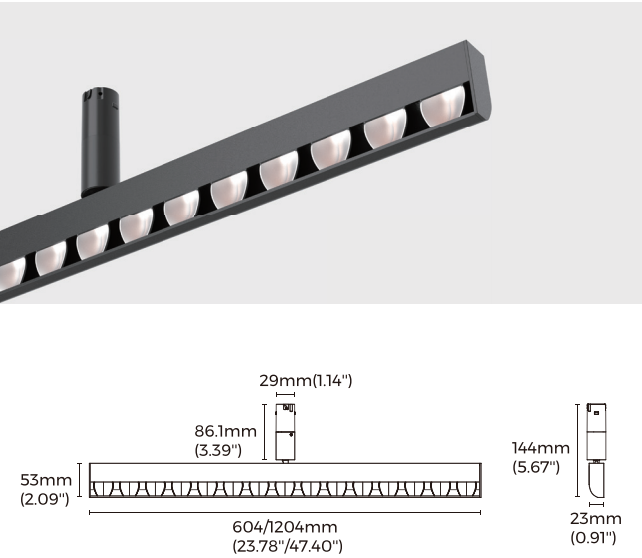


Luminaire Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×53mm(φ0.91"×2.09")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters		
Light source	3030	
SDCM	<3 Step (ANSI)	
CRI	>90	
CCT	2700K/3000K/4000K	
Length(mm)	604(23.78")	1204(47.40")
Power(W)	10	20
Luminous flux(lm)	900	1800
Light efficiency	90LM/W	
Beam angle	60°x25°x73°	

HM40CD

Round tube

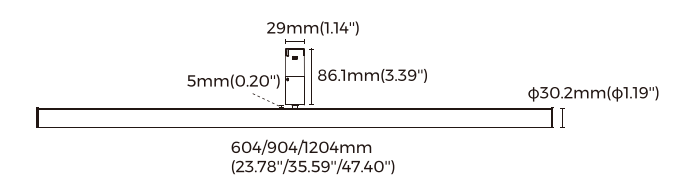




Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	φ30mm(φ1.18")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<3 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	604(23.78")	904(35.59")	1204(47.40")
Power(W)	12	18	24
Luminous flux(lm)	1200	1800	2400
Light efficiency	100LM/W		
Beam angle	200°x110°		

*The above parameters are based on Ra90, 4000K, light source.

HM40FD

Diffuser


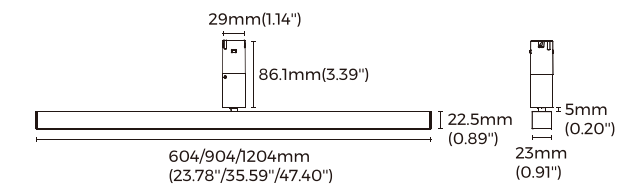
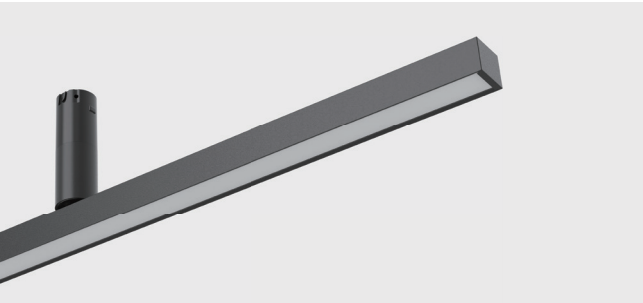


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<3 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	604(23.78")	904(35.59")	1204(47.40")
Power(W)	12	18	24
Luminous flux(lm)	900	1350	1800
Light efficiency	75LM/W		
Beam angle	110°		

HM40FP

Prismatic

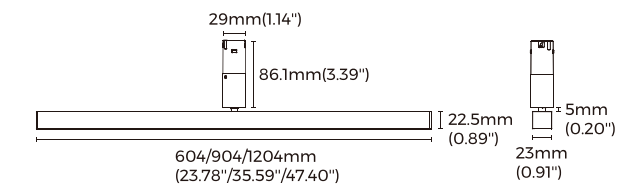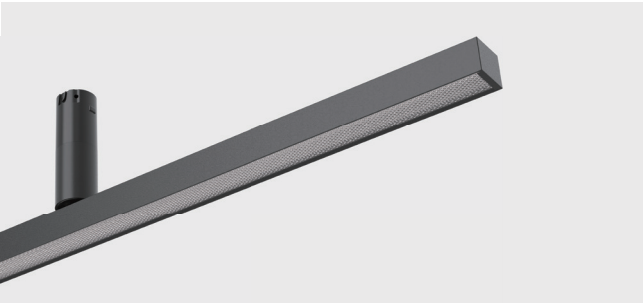



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<3 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	604(23.78")	904(35.59")	1204(47.40")
Power(W)	12	18	24
Luminous flux(lm)	960	1140	1920
Light efficiency	80LM/W		
Beam angle	70°		

*The above parameters are based on Ra90, 4000K, light source.

HM40G

Grating

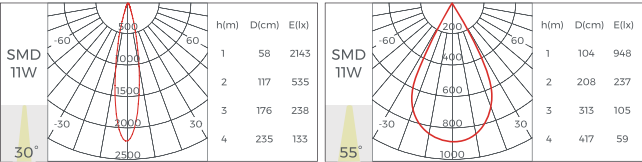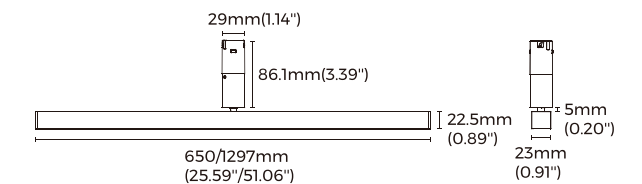



Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters		
Light source	2835	
SDCM	<3 Step (ANSI)	
CRI	>90	
CCT	2700K/3000K/4000K	
Length(mm)	650(25.59")	1297(51.06")
Power(W)	13	26
Luminous flux(lm)	910	1820
Light efficiency	70LM/W	
Beam angle	30°/55°	

*The above parameters are based on Ra90, 4000K, 30° light source.

HM4OLA

Asymmetric

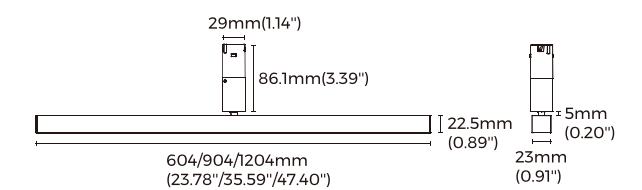




Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<3 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	604(23.78")	904(35.59")	1204(47.40")
Power(W)	12	18	24
Luminous flux(lm)	1200	1800	2400
Light efficiency	100LM/W		
Beam angle	90°x45°x15°		

*The above parameters are based on Ra90, 4000K, light source.

HM40LS

Double Asymmetric

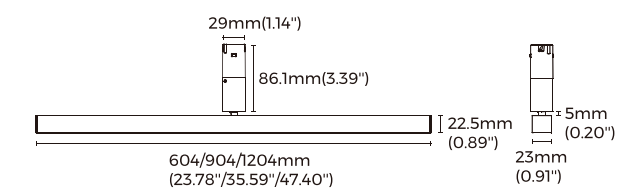
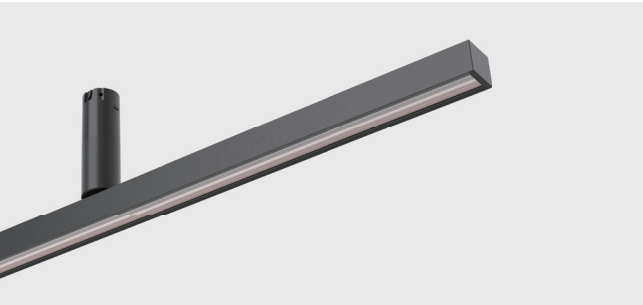


Basic Parameters	
Installation	Ceiling
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters			
Light source	2835		
SDCM	<3 Step (ANSI)		
CRI	>90		
CCT	2700K/3000K/4000K		
Length(mm)	604(23.78")	904(35.59")	1204(47.40")
Power(W)	12	18	24
Luminous flux(lm)	1200	1800	2400
Light efficiency	100LM/W		
Beam angle	100°x90°x15°		

HS40FD | HS40FD(A)

Diffuser

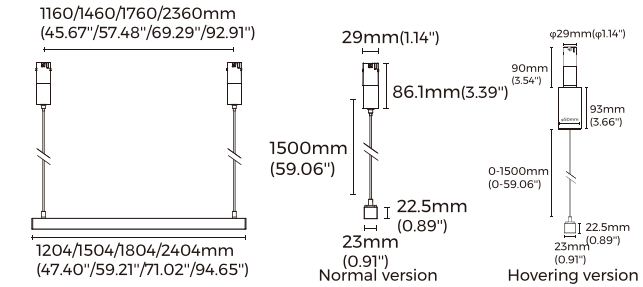



Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters				
Light source	2835			
SDCM	<3 Step (ANSI)			
CRI	>90			
CCT	2700K/3000K/4000K			
Length(mm)	1204(47.40")	1504(59.21")	1804(71.02")	2404(94.65")
Power(W)	24	30	36	48
Luminous flux(lm)	1800	2250	2700	3600
Light efficiency	75LM/W			
Beam angle	110°			

*The above parameters are based on Ra90, 4000K, light source.

HS40FP | HS40FP(A)

Prismatic


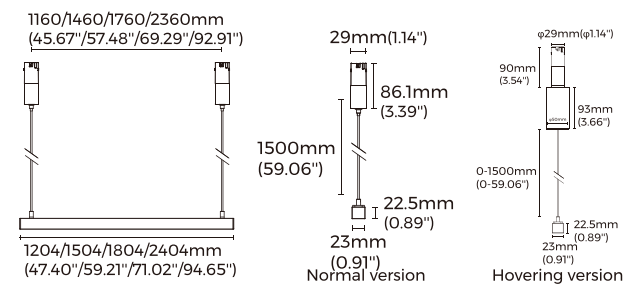


Basic Parameters	
Installation	Pendant
Opening Size	φ56mm(φ2.20")
Size	23×22.5mm(φ0.91"×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters				
Light source	2835			
SDCM	<3 Step (ANSI)			
CRI	>90			
CCT	2700K/3000K/4000K			
Length(mm)	1204(47.40")	1504(59.21")	1804(71.02")	2404(94.65")
Power(W)	24	30	36	48
Luminous flux(lm)	1920	2400	2880	3840
Light efficiency	80LM/W			
Beam angle	70°			

HS40G | HS40G(A)

Grating

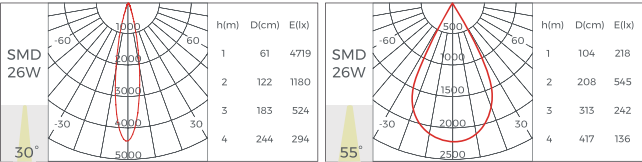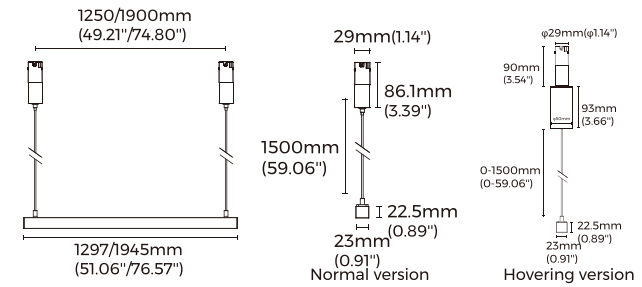




Basic Parameters	
Installation	Pendant
Opening Size	$\phi 56\text{mm}$ ($\phi 2.20"$)
Size	23×22.5mm($\phi 0.91"$ ×0.89")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters		
Light source	2835	
SDCM	<3 Step (ANSI)	
CRI	>90	
CCT	2700K/3000K/4000K	
Length(mm)	1297(51.06")	1945(76.57")
Power(W)	26	39
Luminous flux(lm)	1820	2730
Light efficiency	70LM/W	
Beam angle	30°/55°	

*The above parameters are based on Ra90, 4000K, 30° light source.

HH40FD | HH40FD(A)

Diffuser

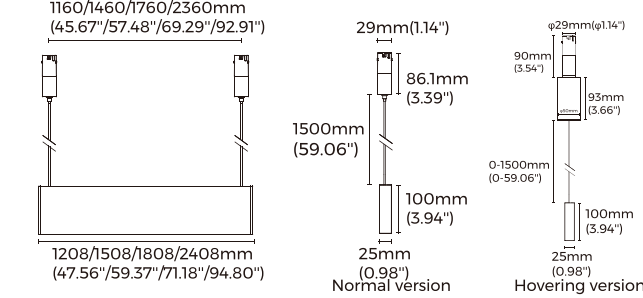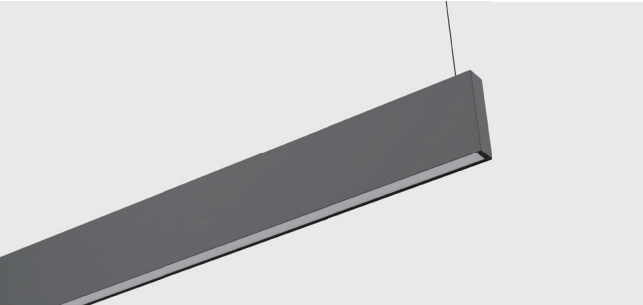

* The hover version is only 1200/1500mm(47.24"/59.06") in size




Basic Parameters	
Installation	Pendant
Opening Size	$\phi 56\text{mm}$ ($\phi 2.20"$)
Size	25×100mm(0.98"×3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters				
Light source	2835			
SDCM	<3 Step (ANSI)			
CRI	>90			
CCT	2700K/3000K/4000K			
Length(mm)	1208(47.56")	1508(59.37")	1808(71.18")	2408(94.80")
Power(W)	48	60	72	96
Luminous flux(lm)	2880	3600	4320	5760
Light efficiency	60LM/W			
Beam angle	Up: 100° , Down: 100°			

*The above parameters are based on Ra90, 4000K, light source.

HH40FP | HH40FP(A)

Prismatic

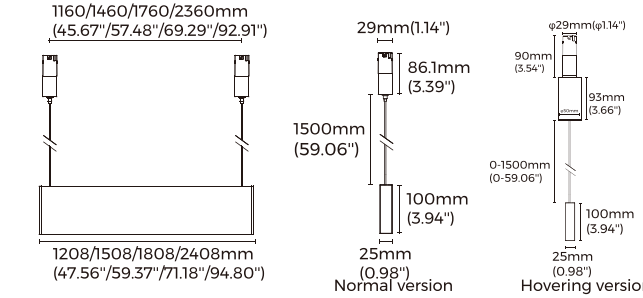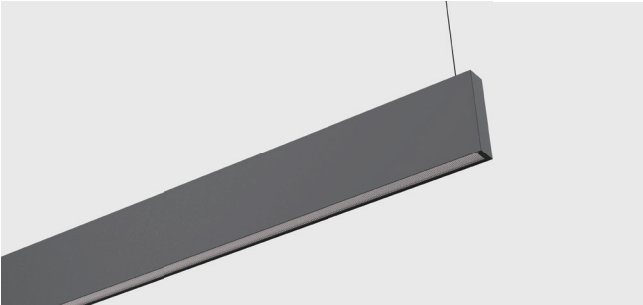

* The hover version is only 1200/1500mm(47.24"/59.06") in size




Basic Parameters	
Installation	Pendant
Opening Size	$\phi 56\text{mm}$ ($\phi 2.20"$)
Size	25×100mm($\phi 0.98"$ ×3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters				
Light source	2835			
SDCM	<3 Step (ANSI)			
CRI	>90			
CCT	2700K/3000K/4000K			
Length(mm)	1208(47.56")	1508(59.37")	1808(71.18")	2408(94.80")
Power(W)	48	60	72	96
Luminous flux(lm)	2976	3720	4464	5952
Light efficiency	62LM/W			
Beam angle	Up: 100° , Down: 70°			

*The above parameters are based on Ra90, 4000K, light source.

HH40G | HH40G(A)

Grating

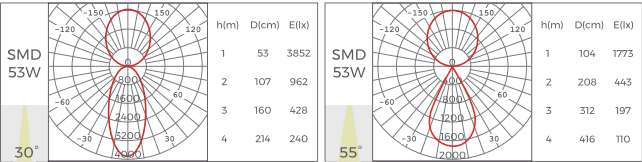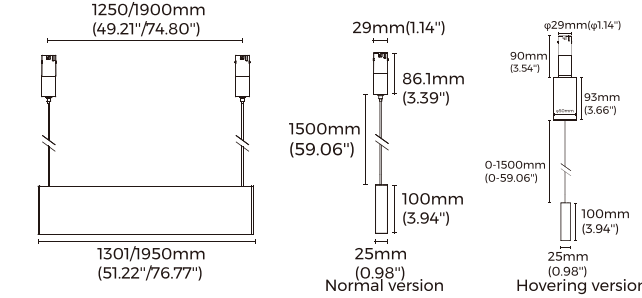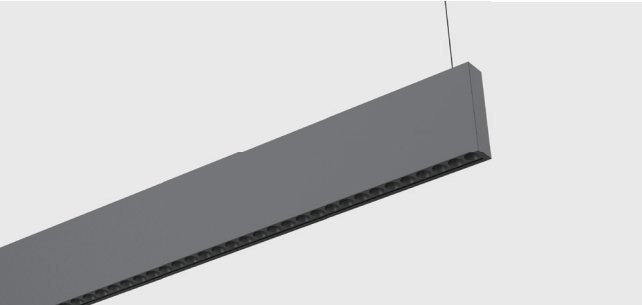

* The hover version is only 1300mm(51.18") in size

Basic Parameters	
Installation	Pendant
Opening Size	$\phi 56\text{mm}$ ($\phi 2.20"$)
Size	25×100mm($\phi 0.98"$ ×3.94")
Material	AL6063-T5
Coating	Black
Dimming method	Non/1-10V/DALI-2/Tuya/CASAMBI
Input voltage	DC48V
Application	Indoor
IP grade	IP20
Warranty	3 years
Certification	CE/UKCA/ROSH/Reach

Luminaire Parameters		
Light source	2835	
SDCM	<3 Step (ANSI)	
CRI	>90	
CCT	2700K/3000K/3500K/4000K	
Length(mm)	1301(51.22")	1950(76.77")
Power(W)	53	78
Luminous flux(lm)	2862	4212
Light efficiency	54LM/W	
Beam angle	Up: 100° , Down: 30°/55°	

*The above parameters are based on Ra90, 4000K, 30° light source.


Accessories

Base of module




RA-HR40(N)

Material: PC+ADC12
Input Voltage:DC48V
Coating:Black,White
Open Size: $\phi 45\text{mm}(\phi 1.77")$
Rated Power:150W
Rated Current:3A
Certification:CE
Warranty:3 years
Maximum load: 8Kg/Lamp

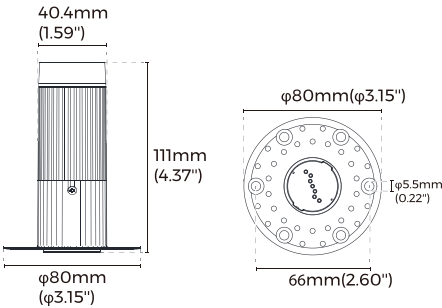

RA-HE40

Material: PC+ADC12
Input Voltage:DC48V
Coating:Black,White
Open Size: $\phi 56\text{mm}(2.20")$
Rated Power:150W
Rated Current:3A
Certification:CE
Warranty:3 years
Maximum load: 1Kg/Lamp

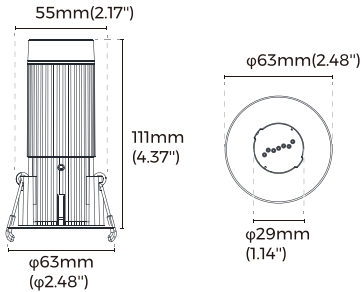


Controller



CASAMBI Control

Model: 1200EN1612-CAS-0-0000003
Size :180*42*25mm(7.09"*1.65"*0.98")
Input Voltage :24-48VDC
Output Signal:DALI
Output DALI Max.current:250mA
Control Devices:≤64
Control Groups:≤8
Certification:CE,UKCA
Others:Controller should be used with DALI dimming modules.

Quick connector

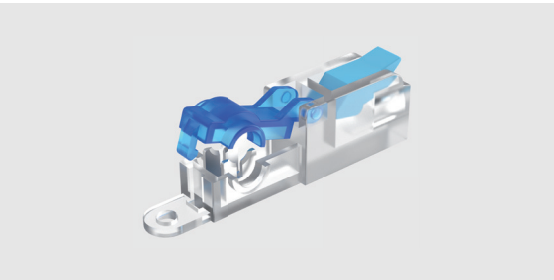

TB-02

Material: PA6
Size:L38*W9.4*H10.5mm(L1.50"*W0.37"*H0.41")
Applicable Wires: 0.5-4mm²(20-11AWG) (Solid wire)
0.5-2.5mm²(20-13AWG)(Stranded wire)
Rated Voltage: 250V/600V
Rated Current: 32A
Certification: CE
Warranty: 3 years

