




HERE, A NEW STAR IS BLOOMING



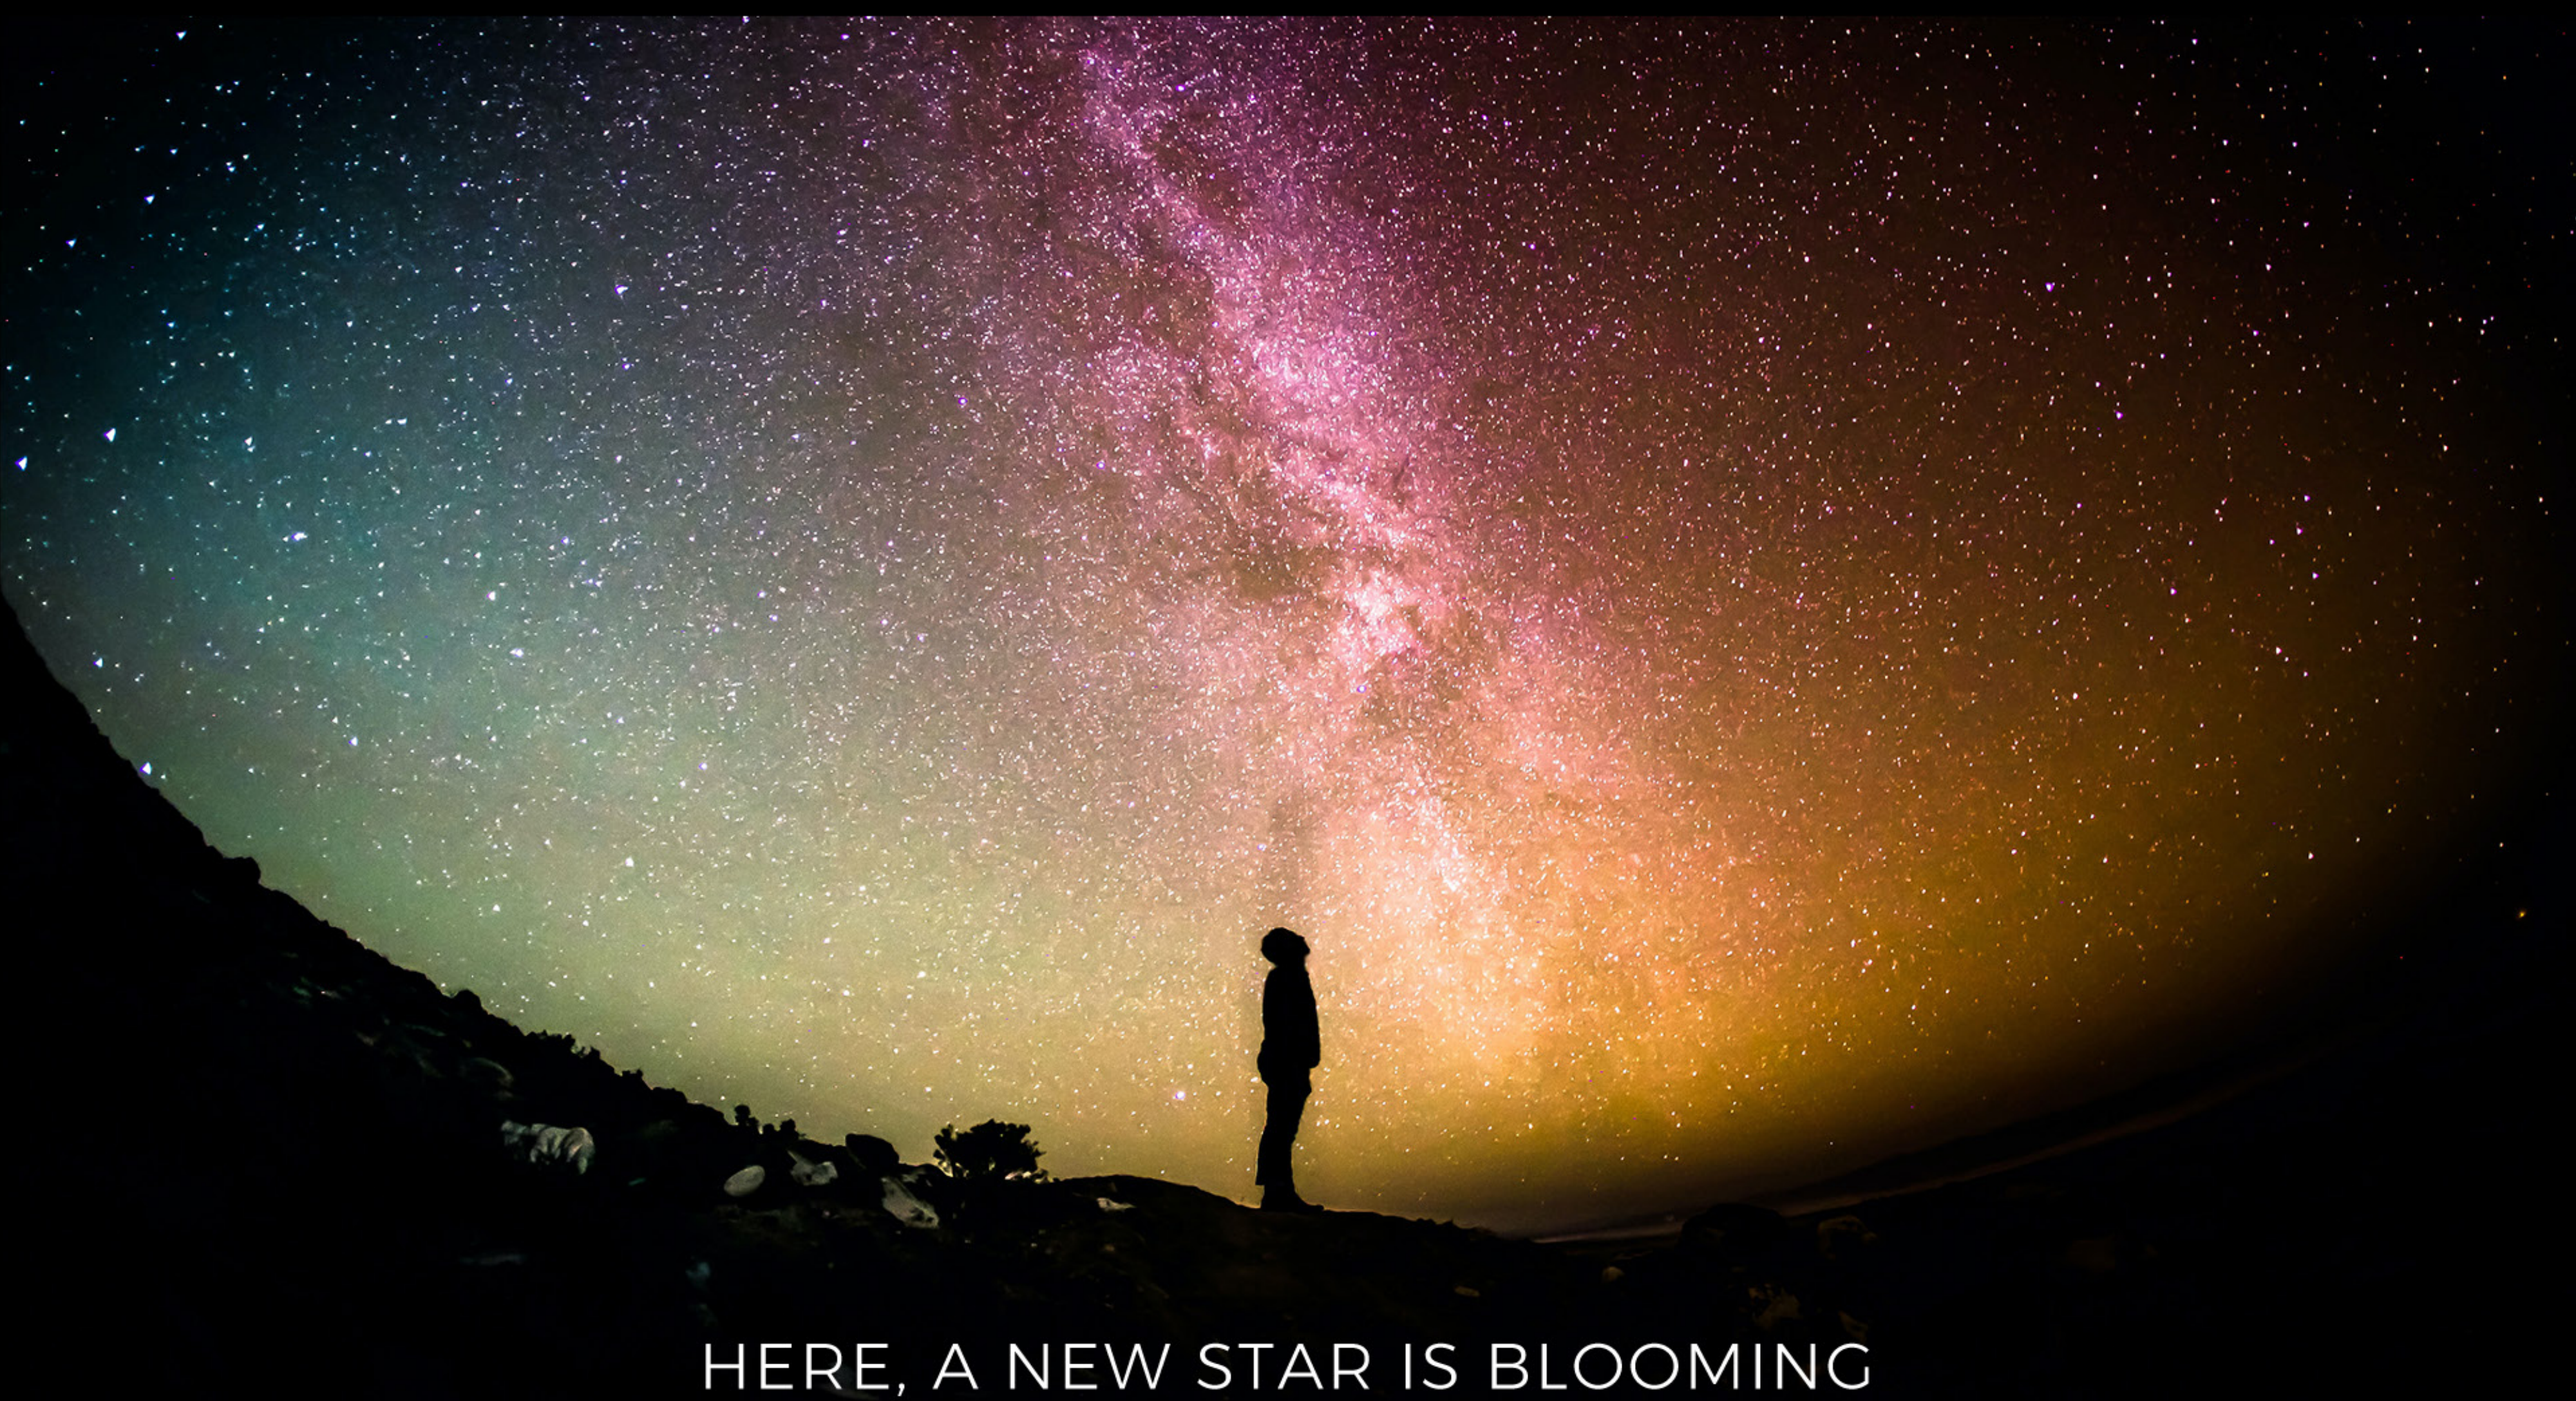

New Generation of LED Strip NEW

Chip Strip
Star Series






















Chip Strip, 180° emitting

Chip directly put on FPC, without silver paste, gold wire and frame, more stable and reliable during installation & shipping

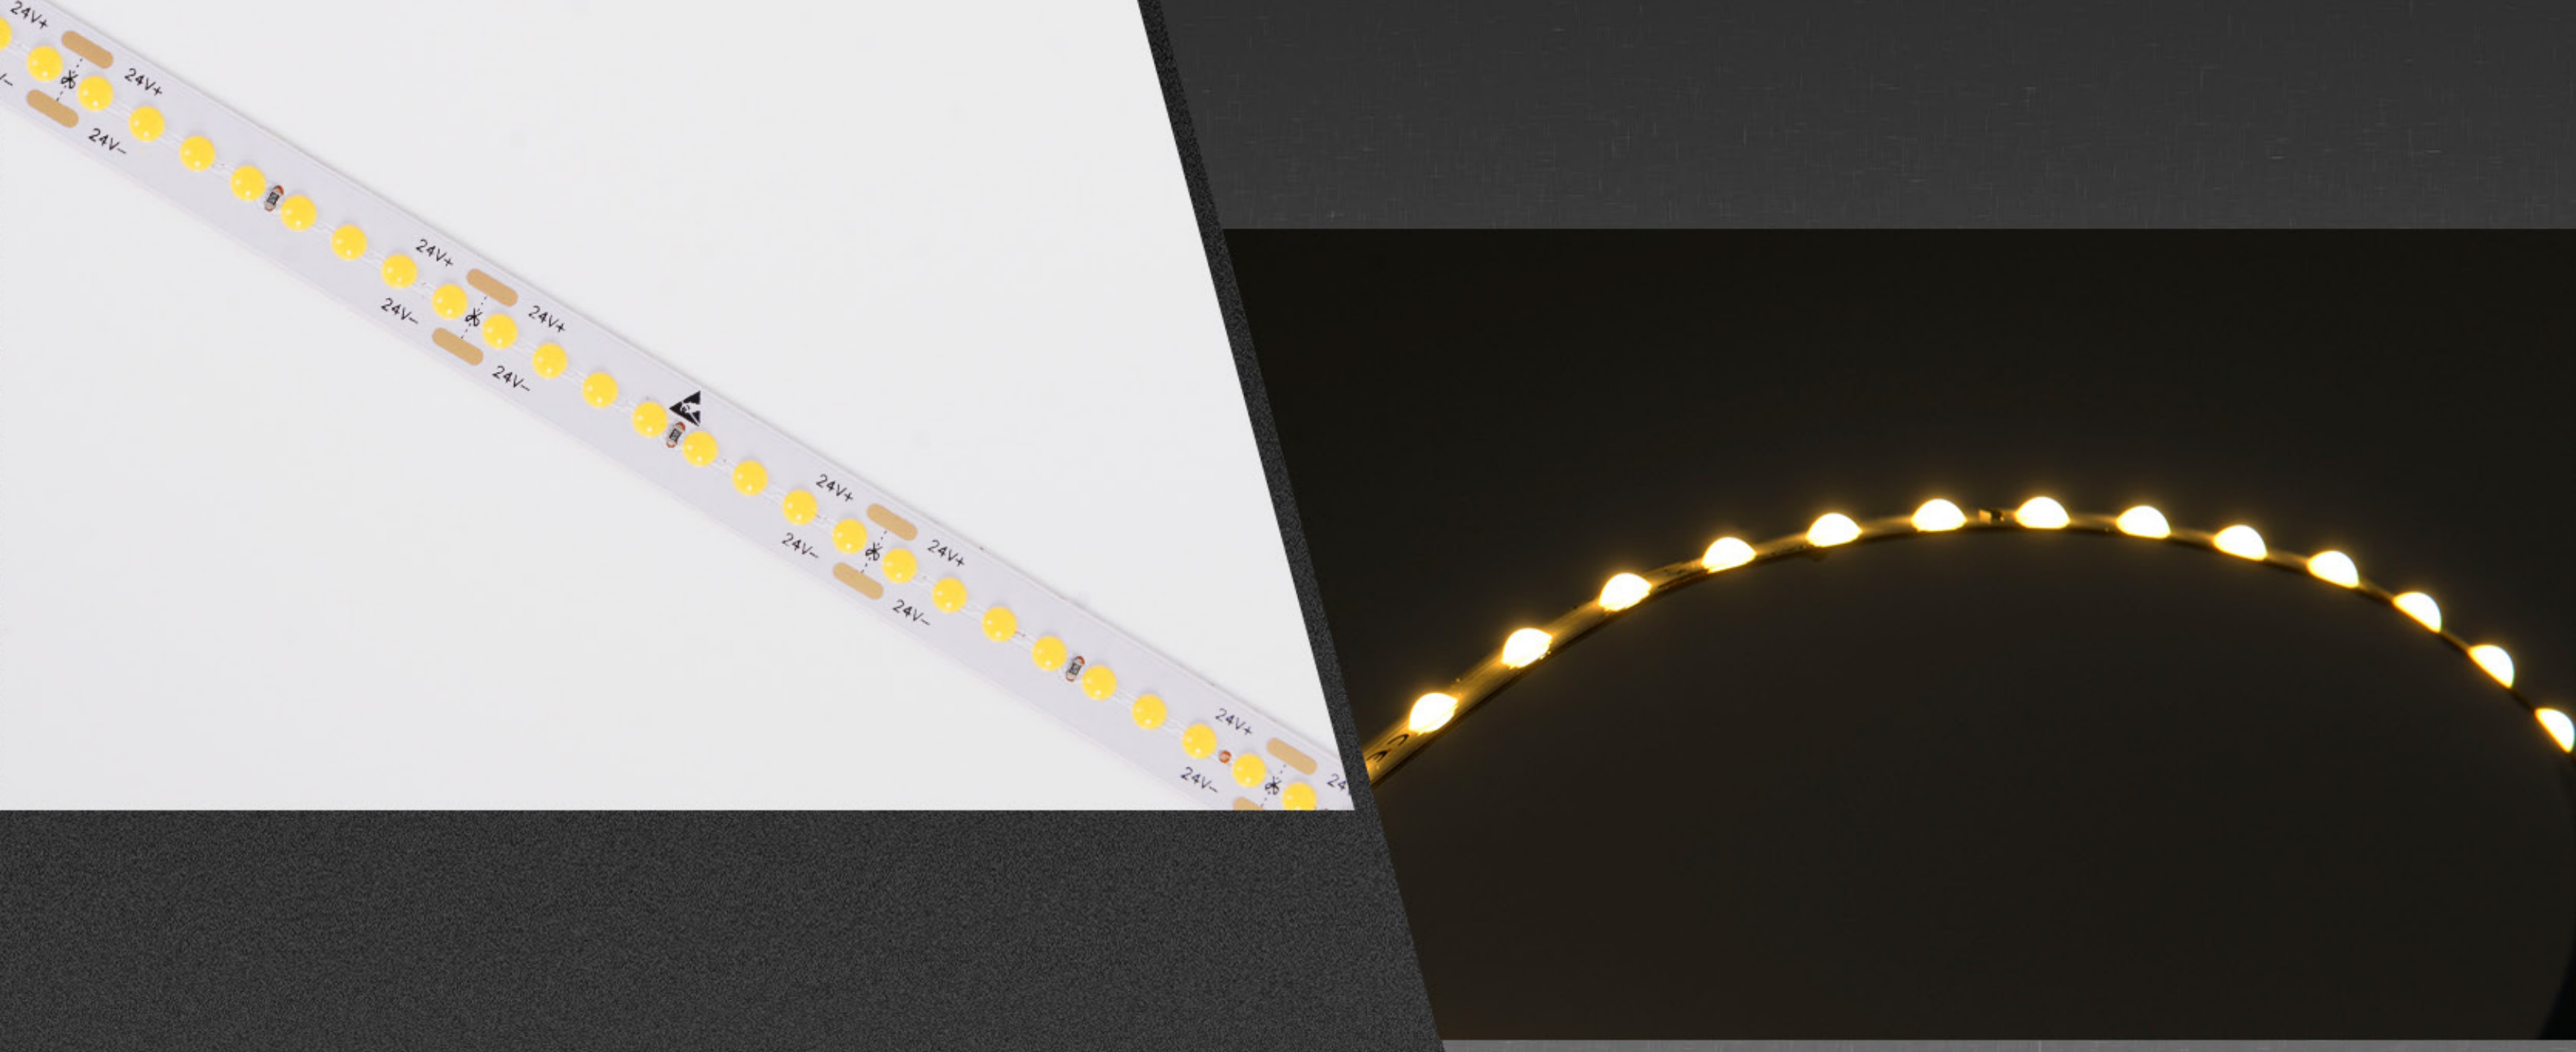






 Anti-vulcanization


Reel to Reel Process

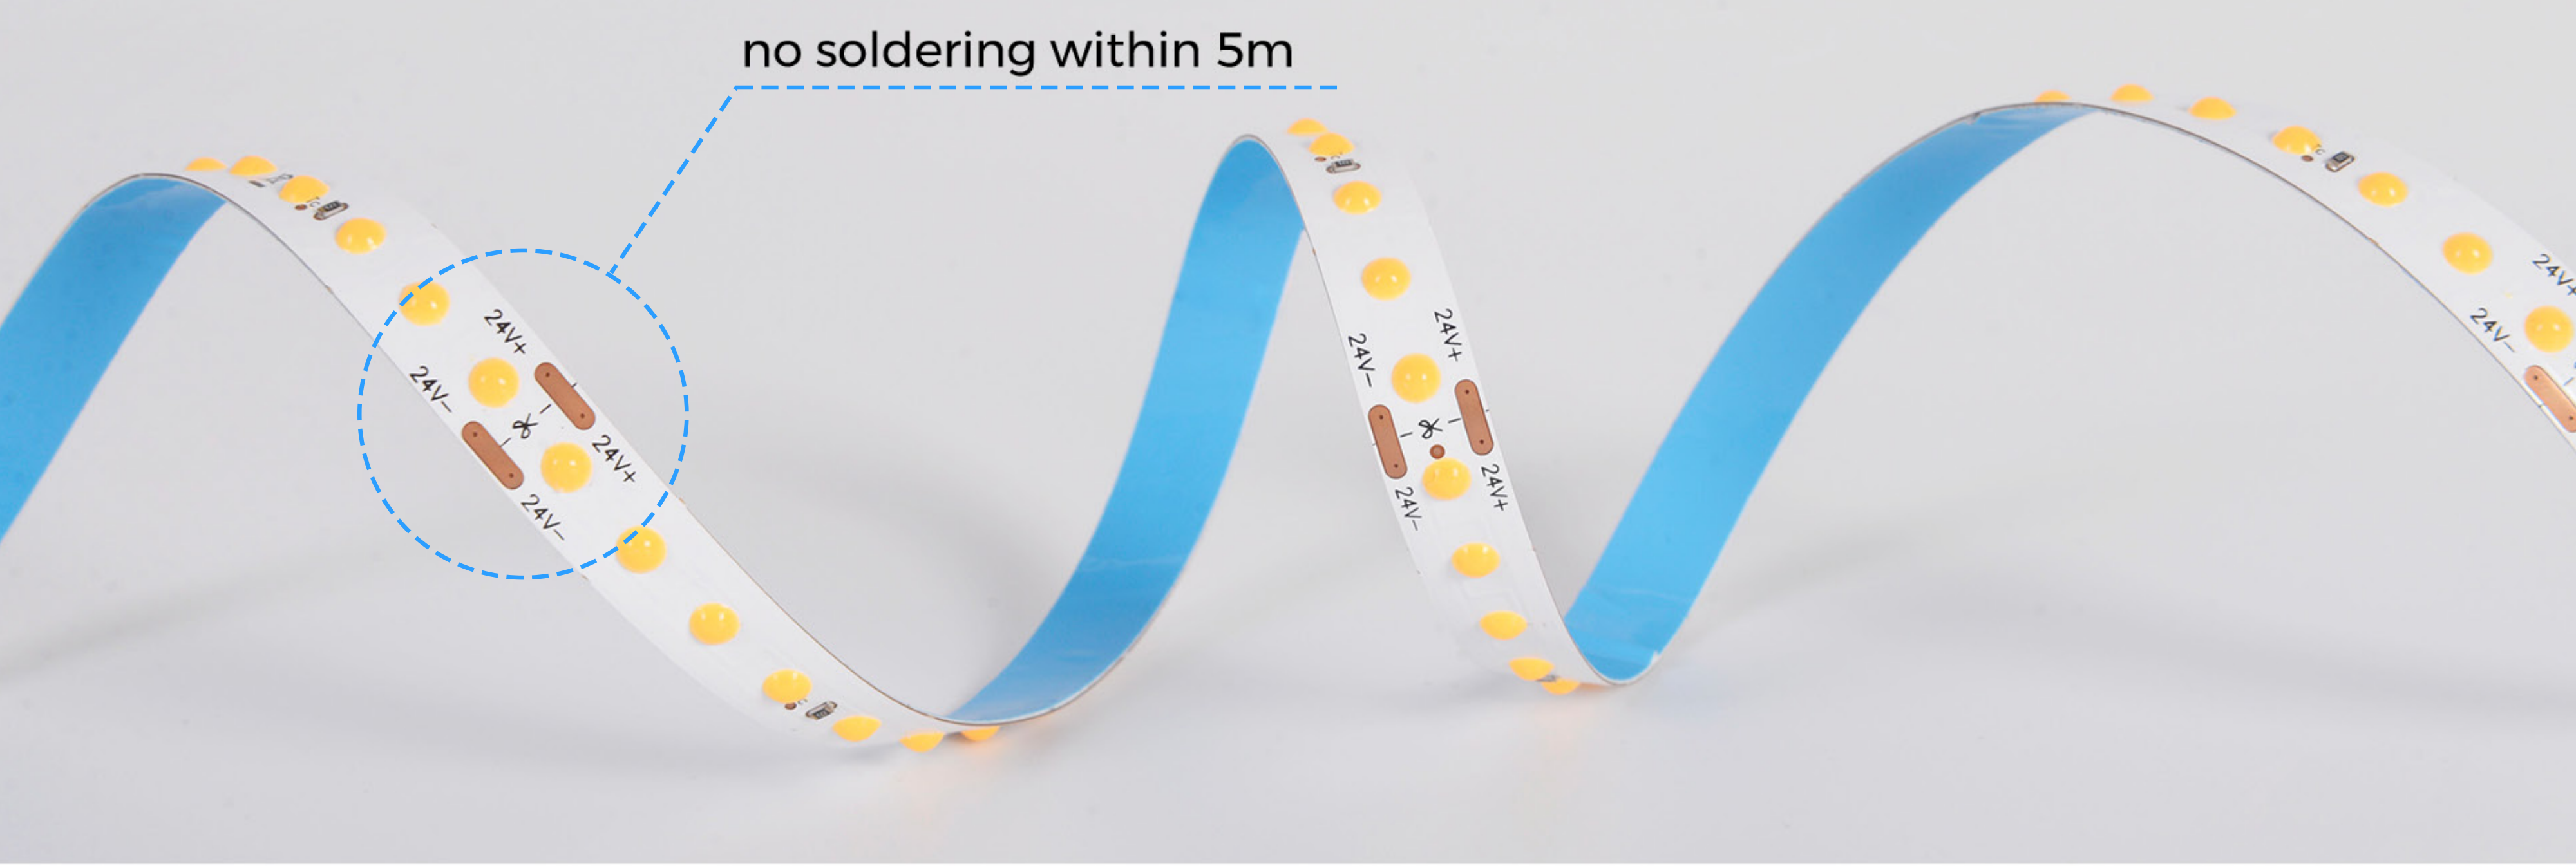


Reliability Test



Twisting Test

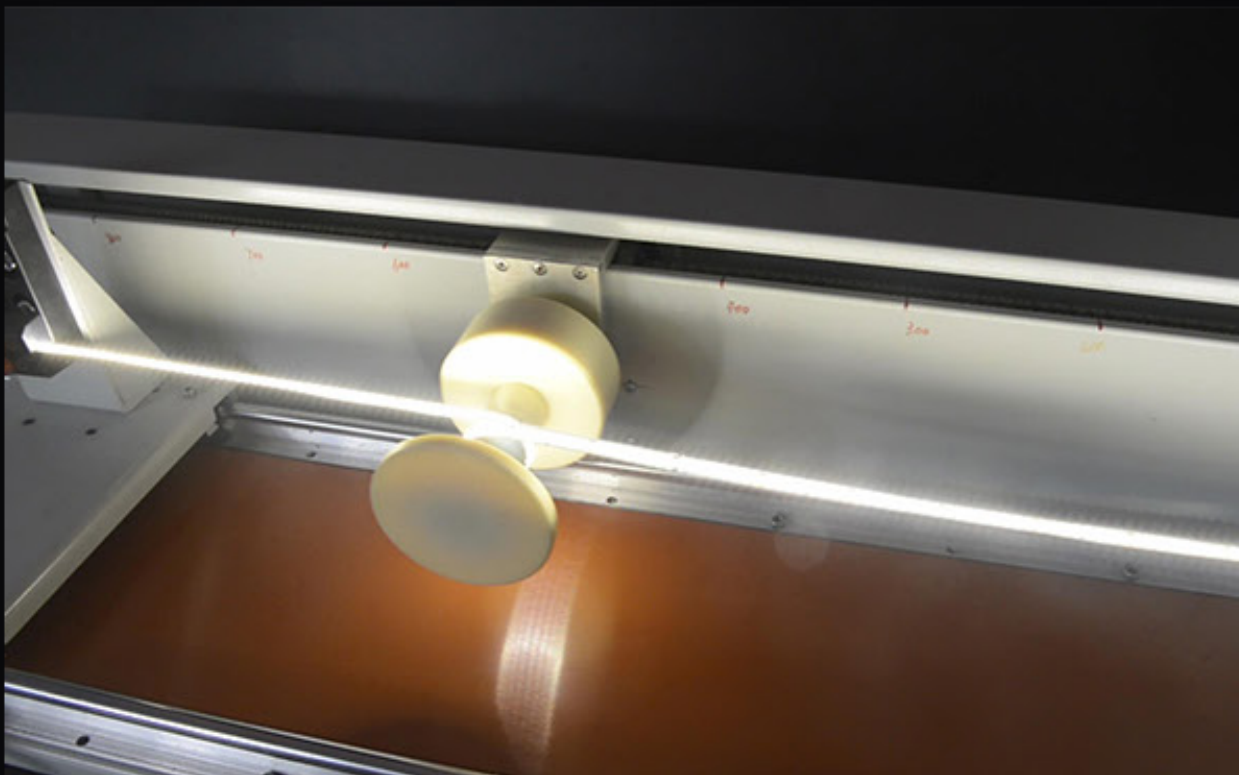

Bending Test

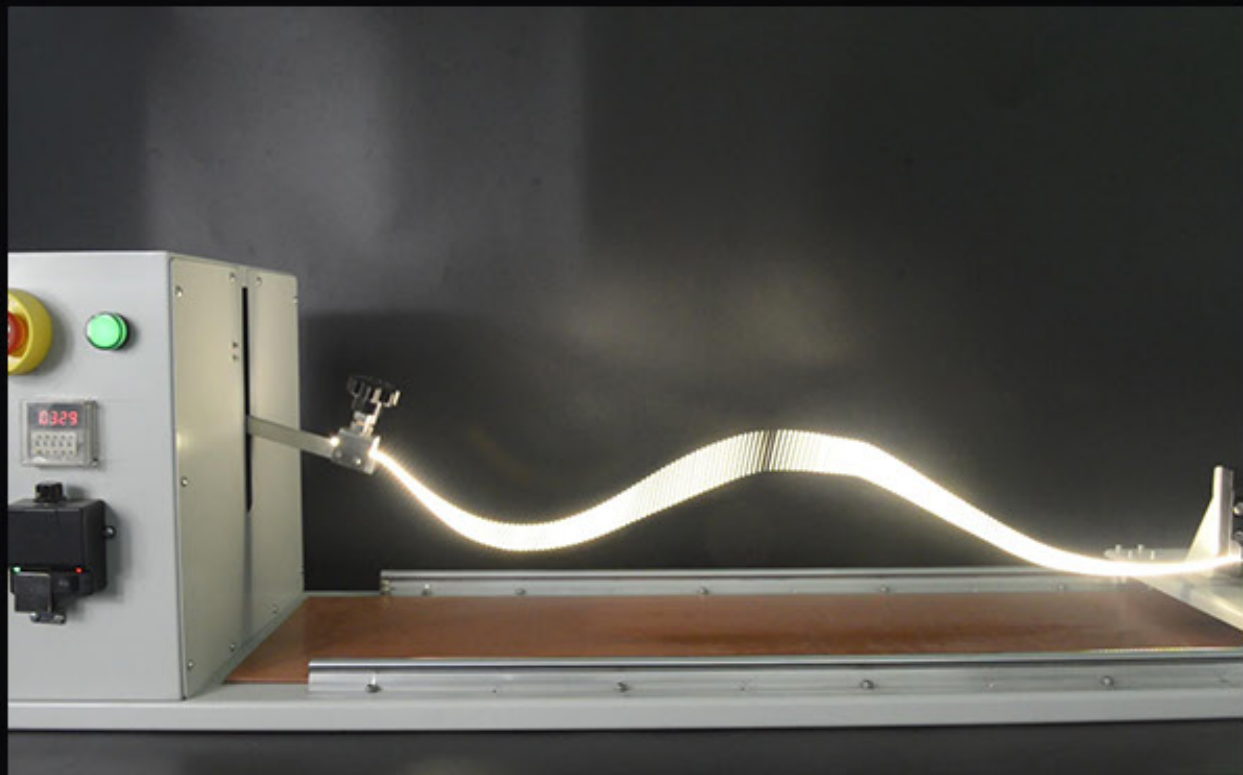


Swing Test



Anti-sulfide Test



Red Ink Test

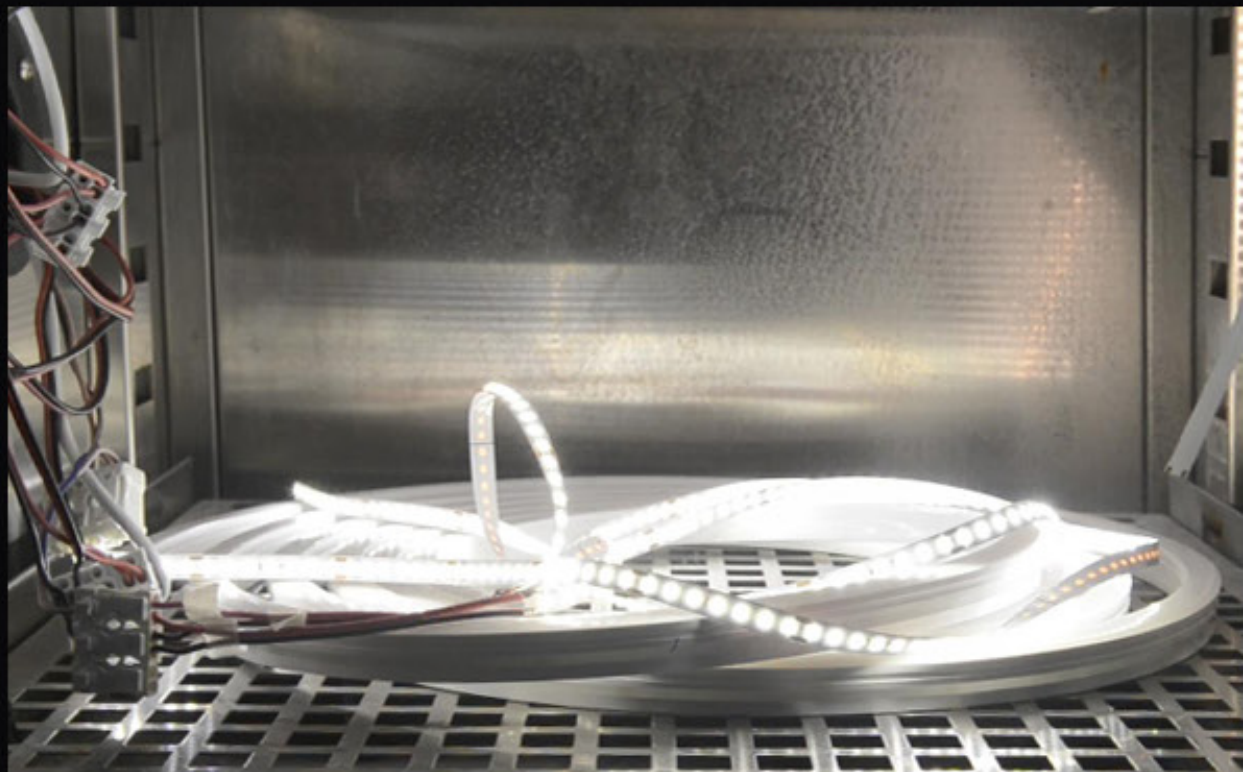

High-temperature & High Humidity Aging Test

Parameter

SKU	DC(V)	FPC Width _{mm}	Max.W/m	CCT/Color	LM/m	CRI	LEDs/m	Cut _{mm}	IP process	Length _m
FD64-24V-8	24	8	4.8	2700 K 3000 K 4000 K 6500 K	510	80	64	125	NO/NA/ETS	5 (soldering-free)
FD128-24V-8	24	8	9.6	2700 K 3000 K 4000 K 6500 K	1080	80	128	62.5	NO/NA/ETS	5 (soldering-free)
FD192-24V-10	24	10	14.4	2700 K 3000 K 4000 K 6500 K	1520	80	192	41.66	NO/NA/ETS	5 (soldering-free)