




# Classic Series

- SMD 2835/2216/3838/5050
- One bin and 2 steps

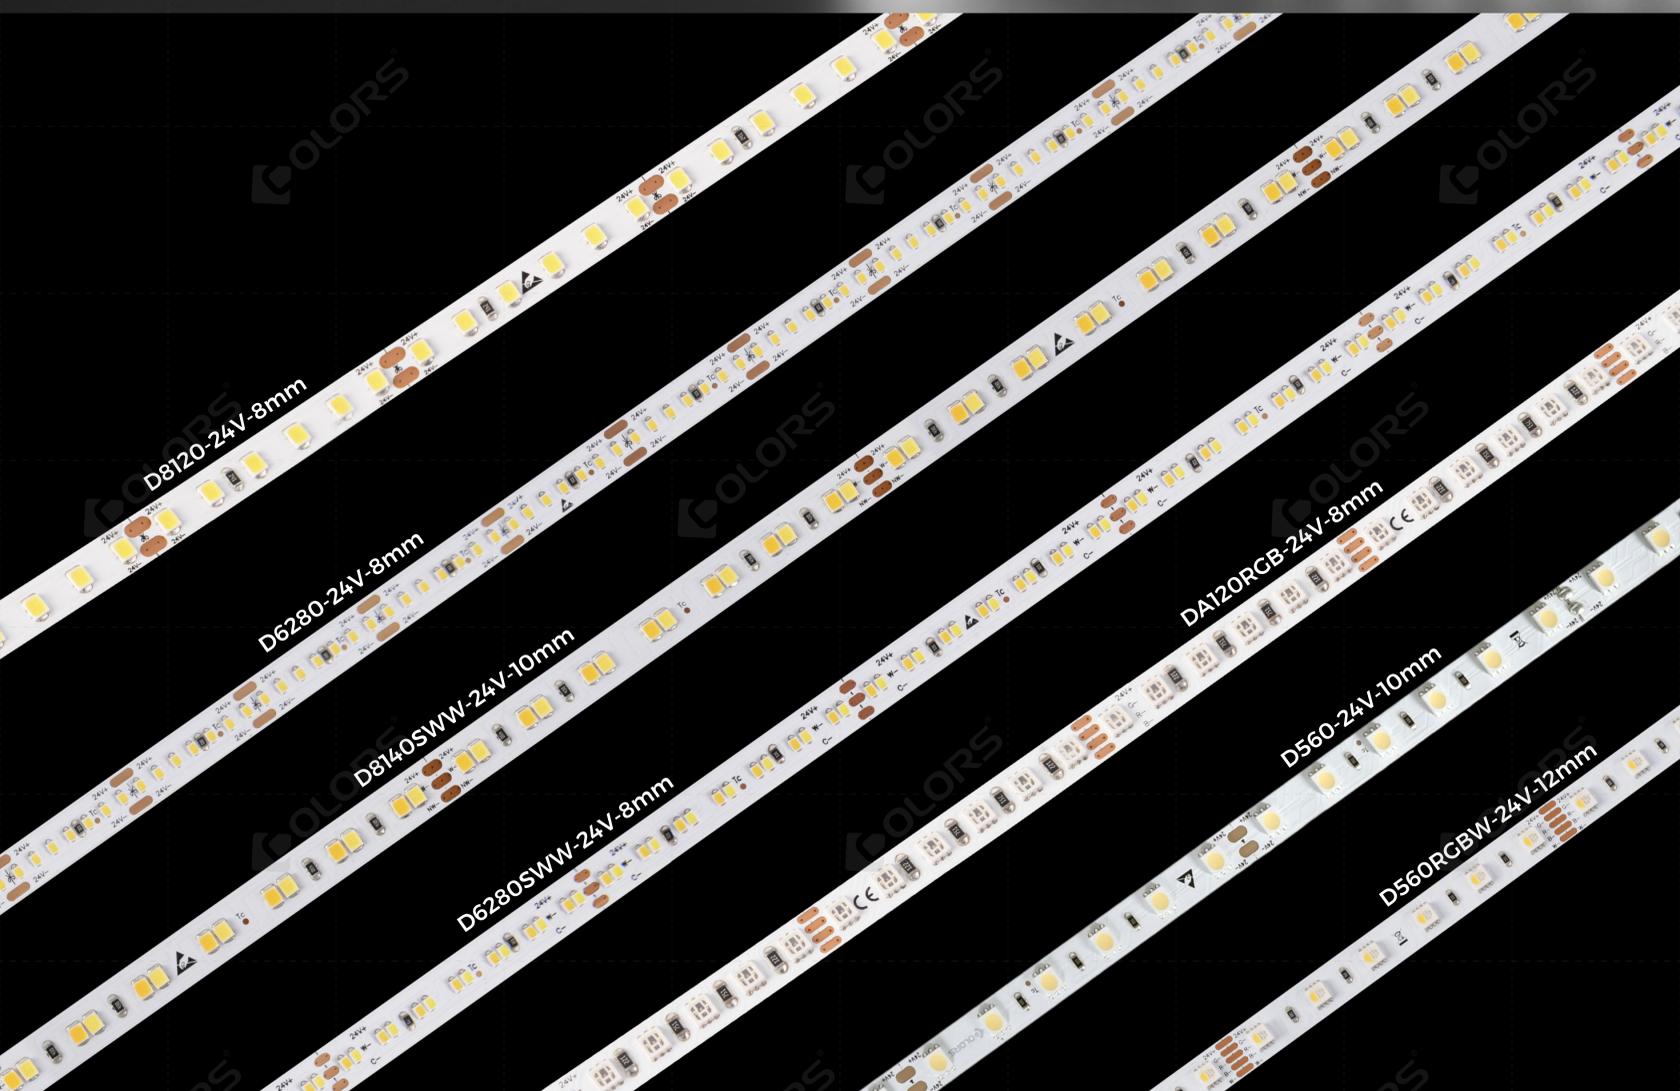

## Applications



## Product Parameters

Model	DC(V)	Max.W/m	Typ.W/m	LM/m(4000K)	CRI	CCT	LEDs/cut(mm)
D8120-24V-8mm	24	14.8	13.5	1320	>80,>90,>95	RGB+19/23/27/30/35/40/50/6000K	6/50
D6280-24V-8mm	24	16.5	15	1650	>90	27/30/40/6000K	7/25
D8140SWW-24V-10mm	24	19.2	17.1	1710	>80,>90	CCT	14/100
D6280SWW-24V-8mm	24	16.5	15	1508	>90	CCT	14/50
DA120RGB-24V-8mm	24	11	10	430	/	RGB	6/50
D560-24V-10mm	24	14.4	12.5	1135	>90,>95	RGB+23/27/30/35/4000K	6/100
D560RGBW-24V-12mm	24	19.2	16.8	700	/	RGBW	6/100