## Wall Washing 3D Lens Strips

# STEEL HINGE, SUPER DURABLE

2722 / 2218

## Internal Connection

### Steel HINGE+FPC

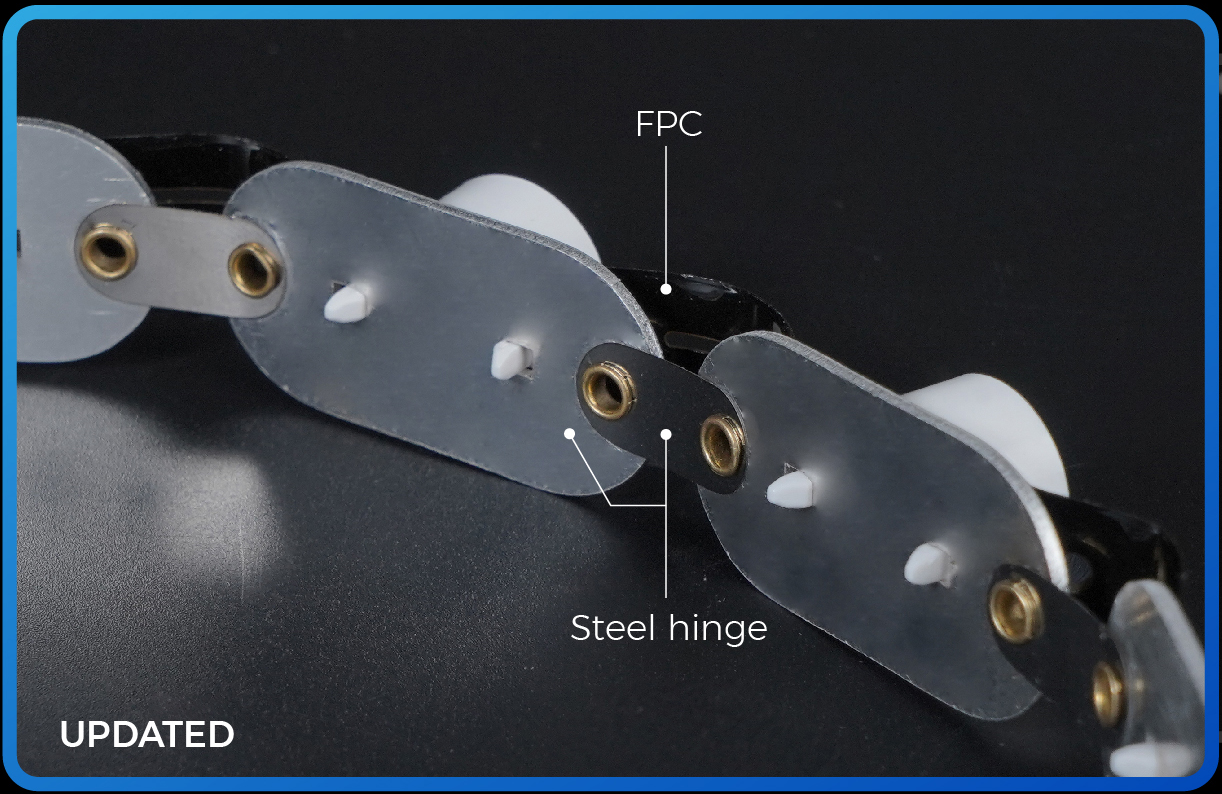

***5M*** **length, lower installation cost.**
**Dual connection, stronger anti-3D-bending**

### FPC

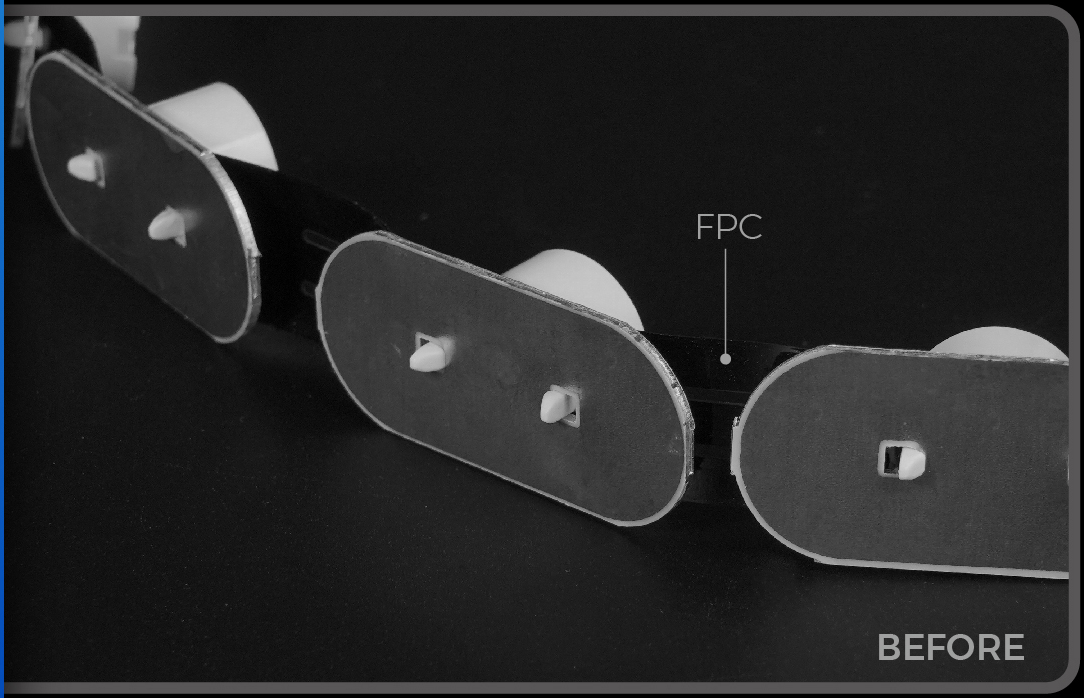

**1m length, higher installation costs,**
**Single connection,higher broken risk**

## End Cap

### Bottom Cable

### Straight Cable

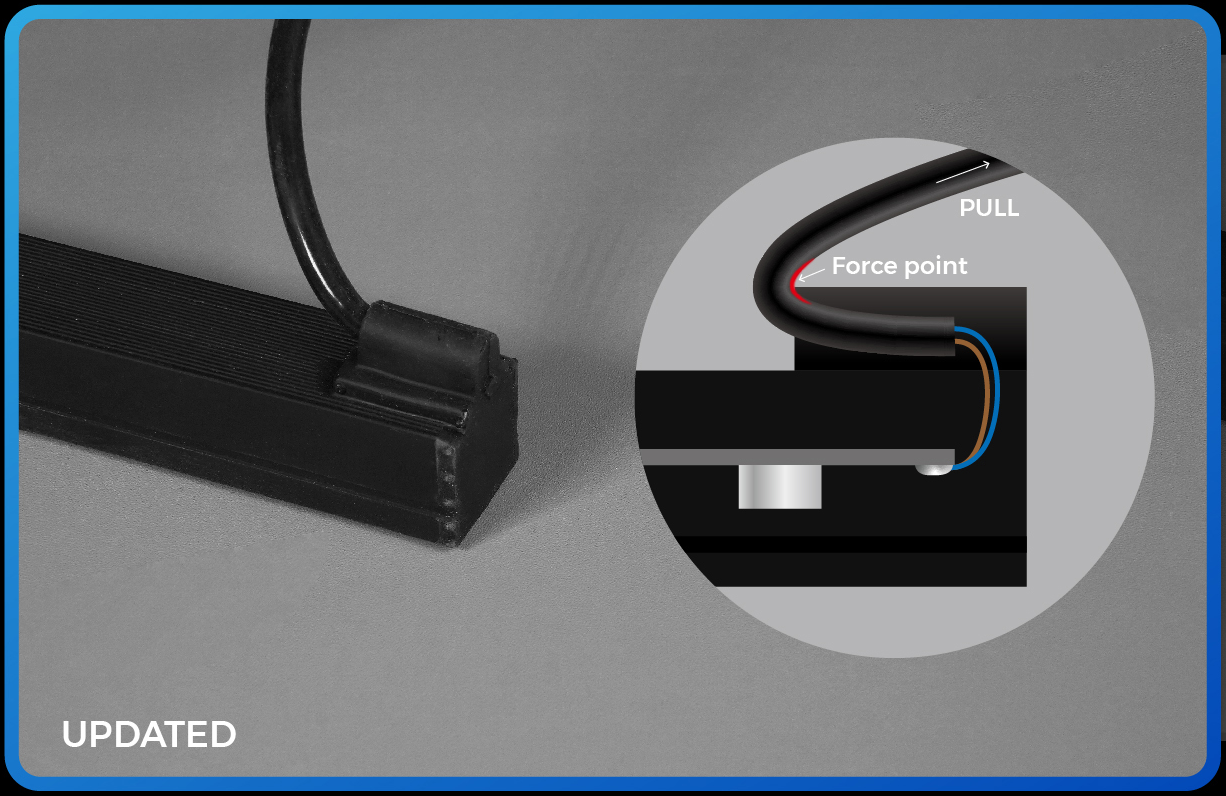

Silicone cap and soldering pad
bear the cable pull force, higher anti-tensile.

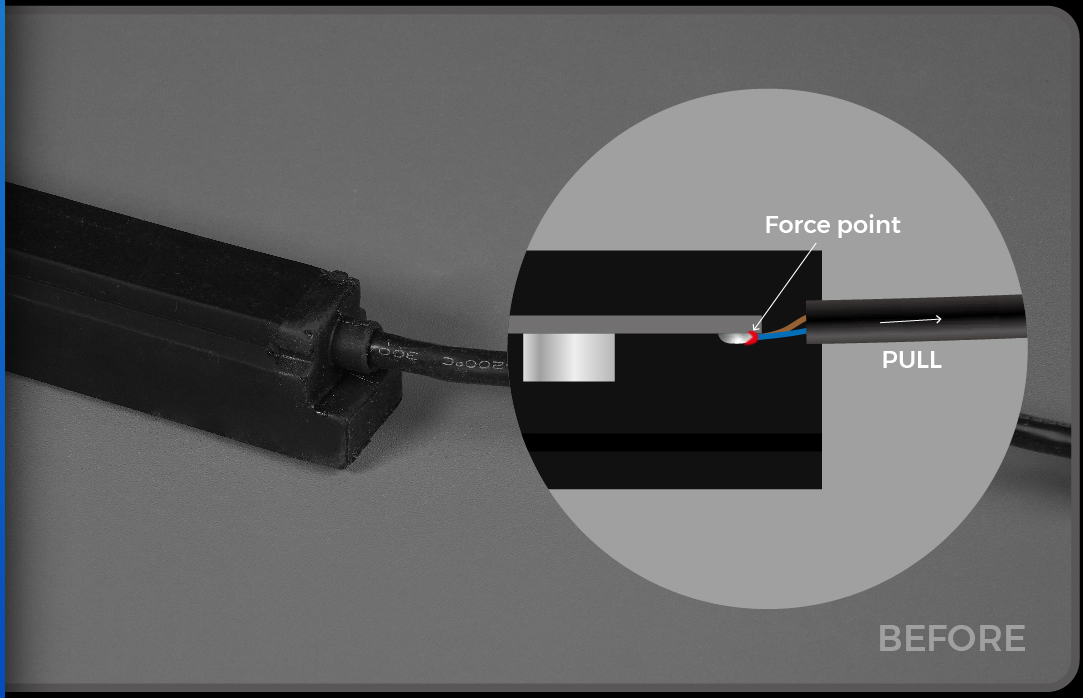

Single soldering pad bear the cable pull force,
higher breaking pads risk.

## ESD processing

### ESD Processing

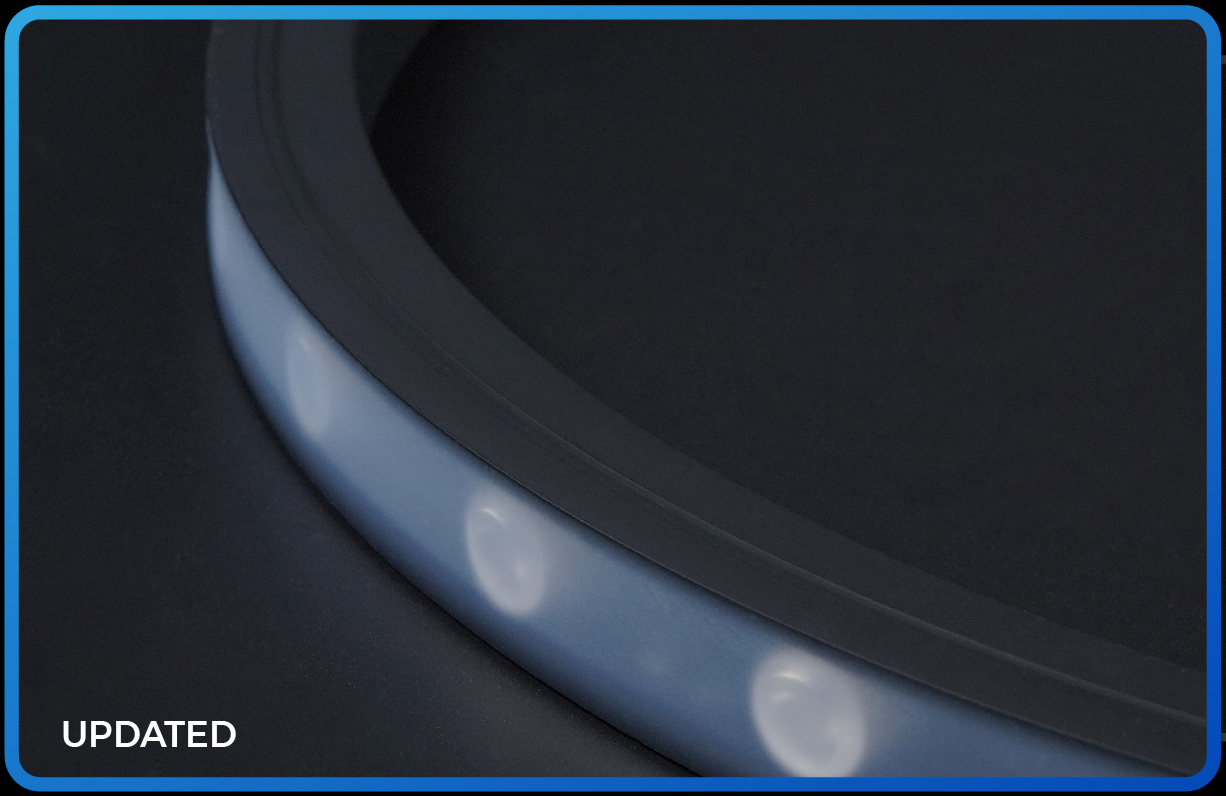

Anti-glare,anti-dust, easy to clean

### Non ESD Processing

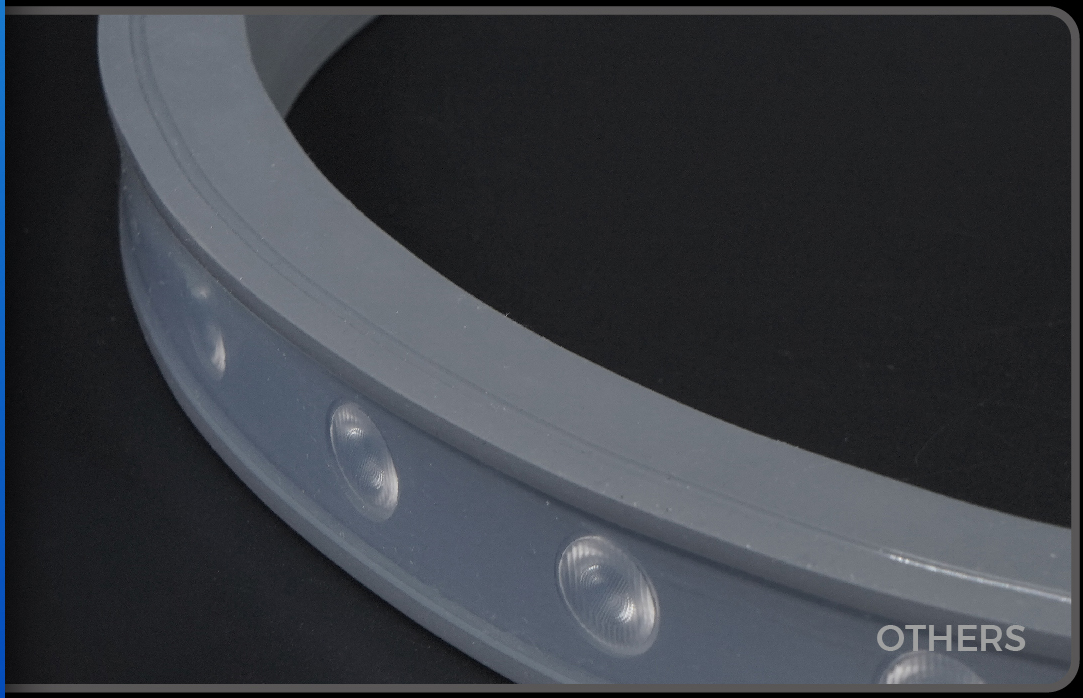

Silicone absorb dust&dirty

## Install Accessories


Aluminum clip


Moldable aluminum profile


Adjustable bracket


Aluminum profile

**UPDATED**


Flat mounting clip


Flat mounting slot

Moldable groove

**BEFORE**

**Strips fixed firmly,
angle adjustable, cable invisible**

**Strips fixed loose,
angle not adjustable, cable visible**

## Package

### New package

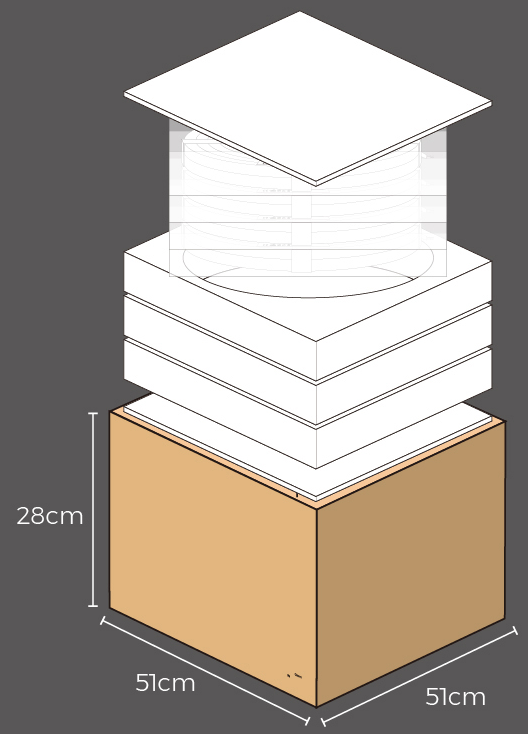

**UPDATED**

Save shipping cost

### Old package

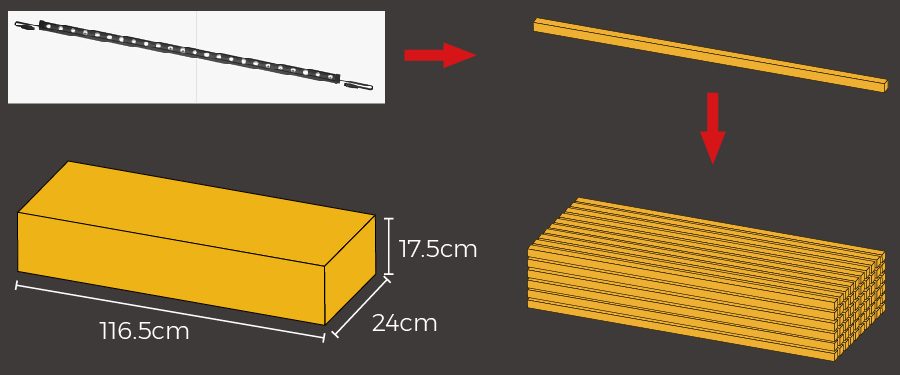

**BEFORE**

## Install

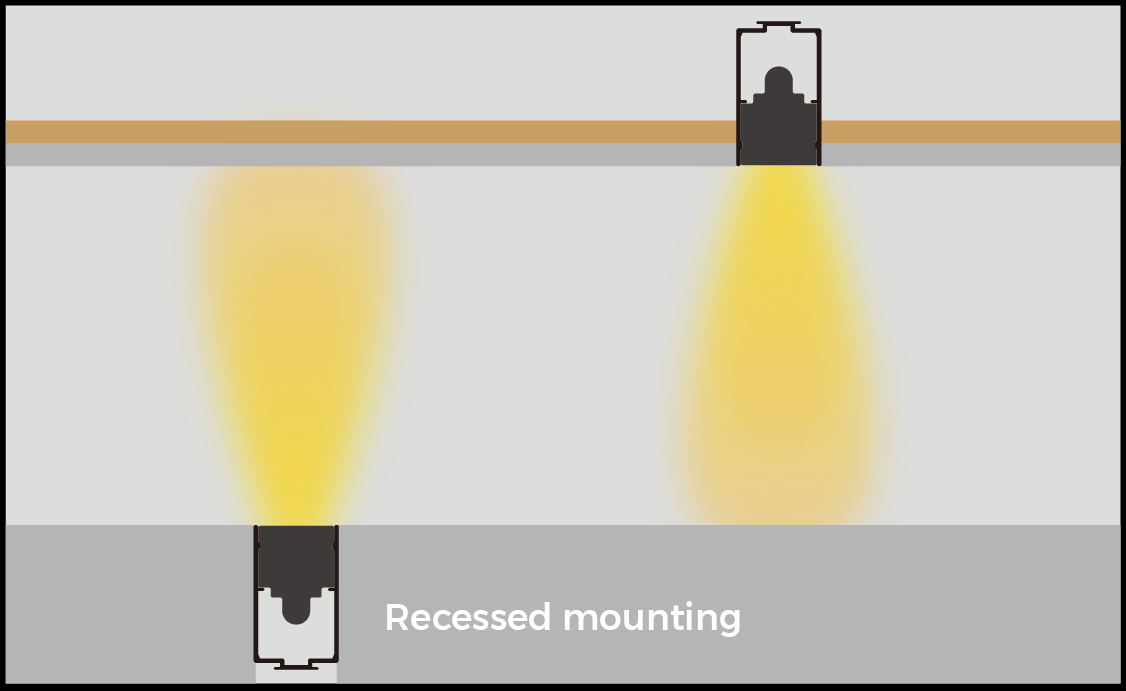
Recessed mounting

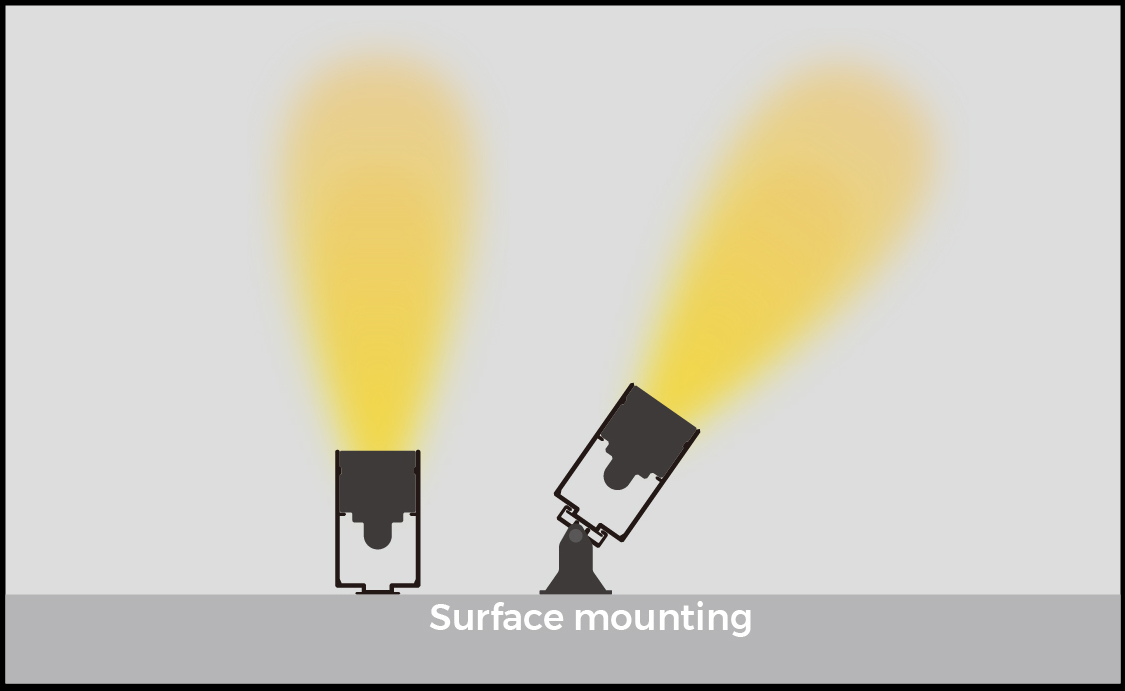
Surface mounting

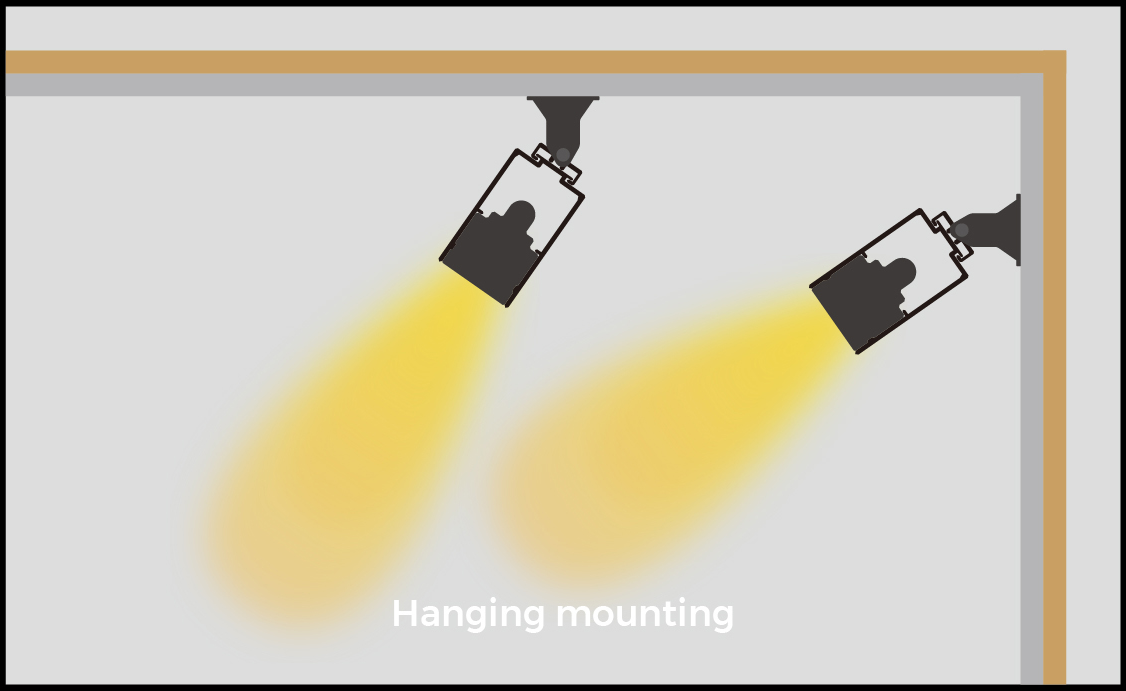
Hanging mounting

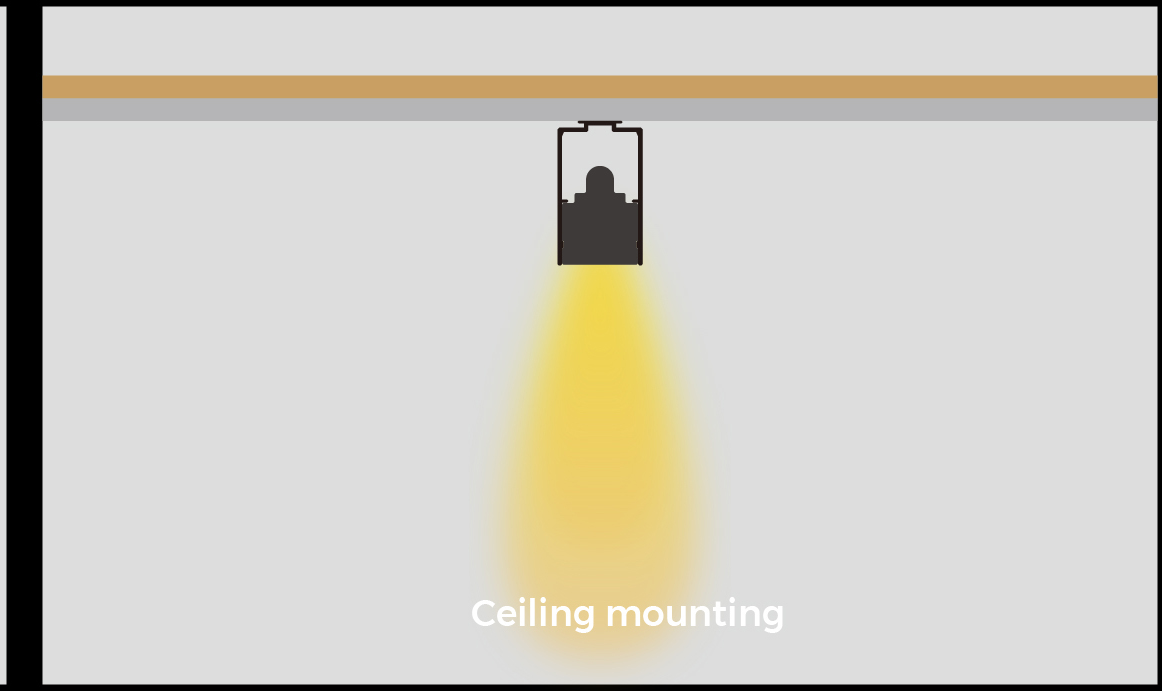
Ceiling mounting

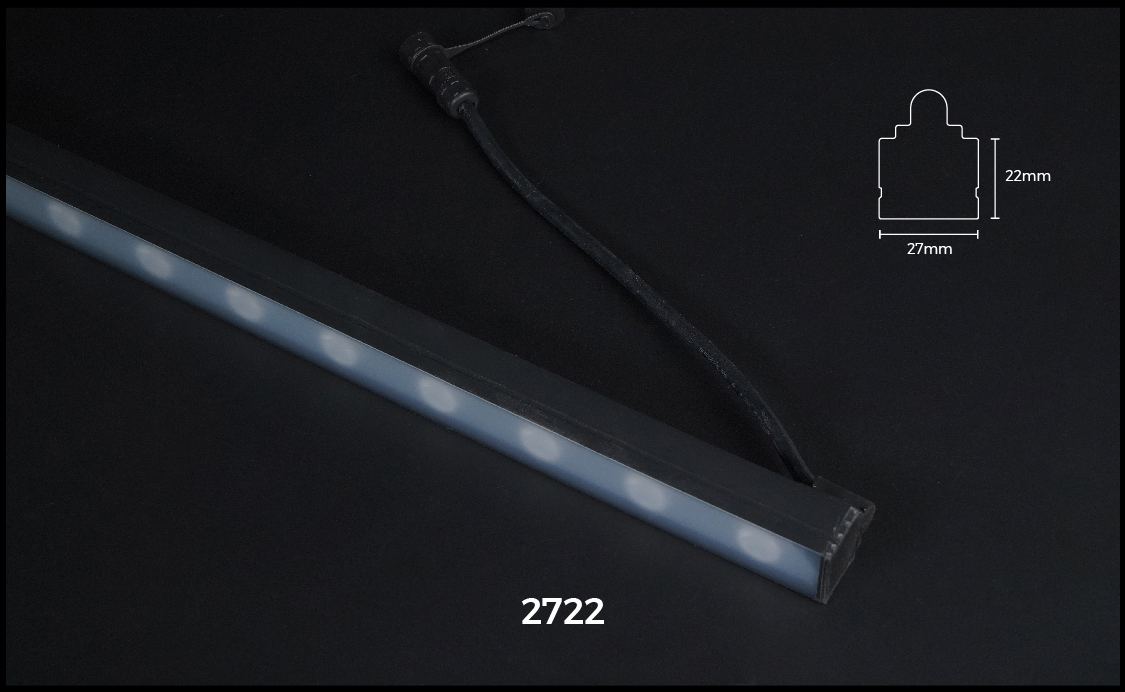

2722

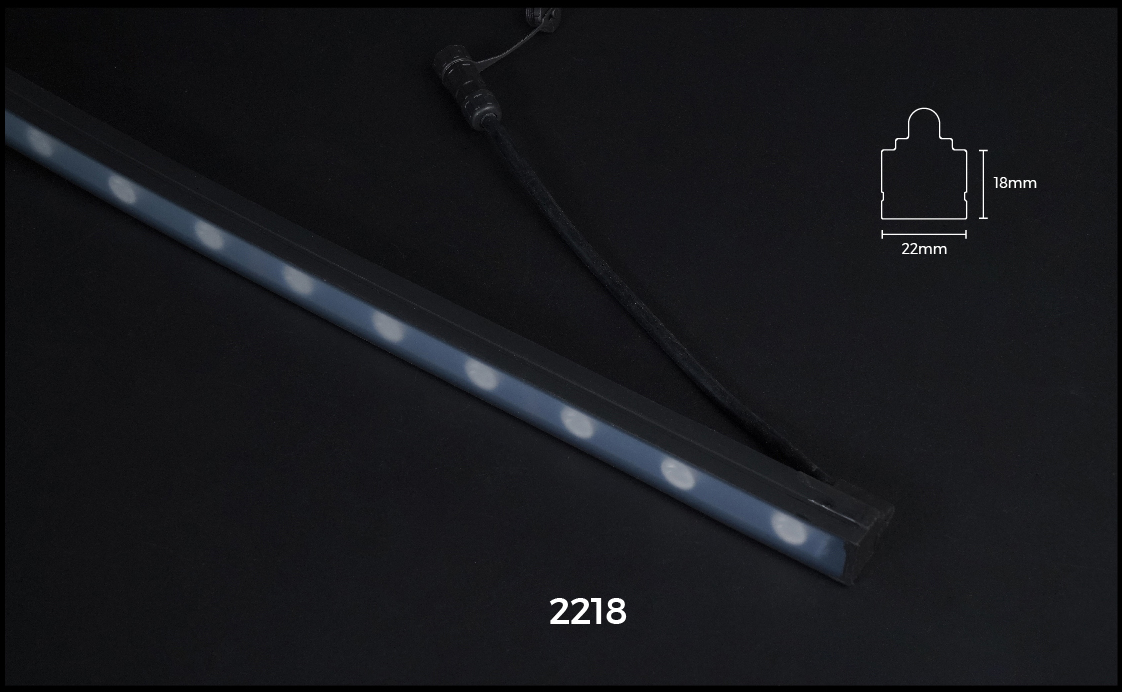

2218

## Applications

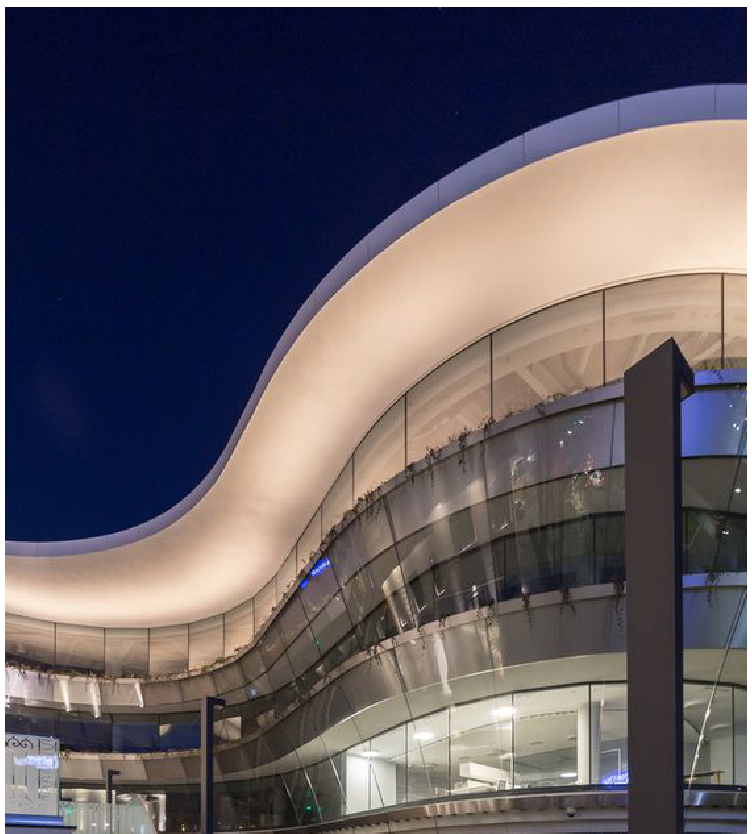

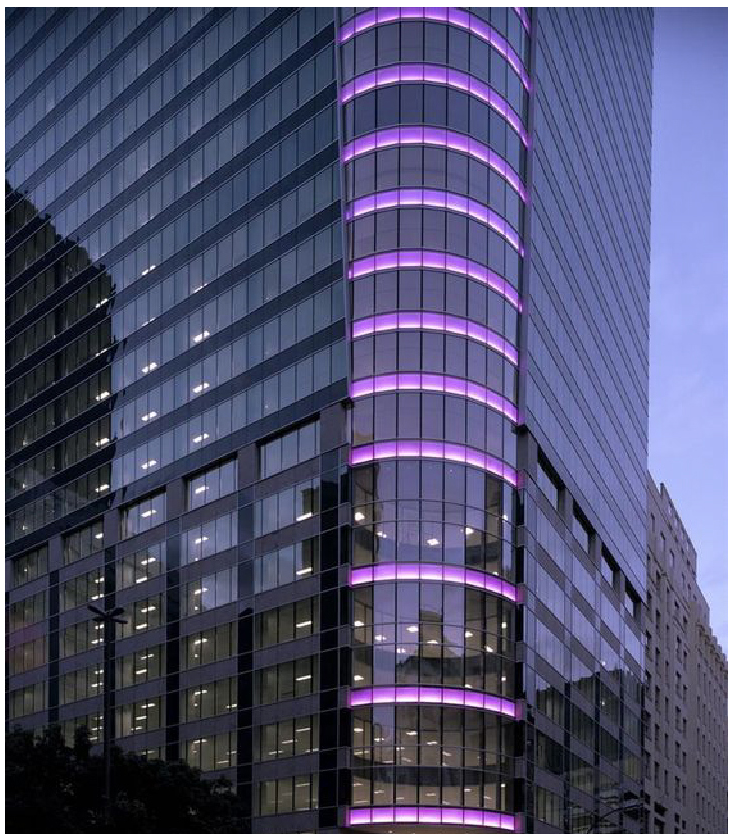

TORRE ALMIRANTE

# Product Parameters

| | Model | DC(V) | Max.W/m | Typ.W/m | LM/m (4000K) | Pixel/m (IC) | CCT/Color | Beam angle | Length (m) | IP | Warranty (years) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | LX24-24V-2722mm | 24 | 26.4 | 24 | 1700 | / | 27/30/35/40/6500K | 25°/35° | 5 | IP65 | 3 |
| DMX | LMX24-24V-2722mm | 24 | 26.4 | 24 | 1700 | 4(UCS512H4) | DMX+27/30/35/40/6500K | 25°/35° | 5 | IP65 | 3 |
| DMX | LMX24RGB-24V-2722mm | 24 | 26.4 | 24 | 750 | 4(UCS512H4) | DMX-RGB | 25°/35° | 5 | IP65 | 2 |
| DMX | LMX24RGBW-24V-2722mm | 24 | 26.4 | 24 | 880 | 4(UCS512H4) | DMX-RGB+27/30/35/40/6500K | 25°/35° | 5 | IP65 | 2 |
| | LX24-24V-2218mm | 24 | 19.8 | 18 | 1280 | / | 27/30/35/40/6500K | 25°/35° | 5 | IP65 | 3 |
| DMX | LMX24-24V-2218mm* | 24 | 19.8 | 18 | 1280 | 4 | DMX+27/30/35/40/6500K | 25°/35° | 5 | IP65 | 3 |
| DMX | LMX24RGB-24V-2218mm* | 24 | 19.8 | 18 | 560 | 4 | DMX-RGB | 25°/35° | 5 | IP65 | 2 |
| DMX | LMX24RGBW-24V-2218mm* | 24 | 19.8 | 18 | 660 | 4 | DMX-RGB+27/30/35/40/6500K | 25°/35° | 5 | IP65 | 2 |

*COMING SOON