

LENS NEON

Flexible 5m Cascading | Medium & High Power Wall Washer Application

3-5-8m Wall Washing Height | Multiple Angles Available | IP67 | 5-Year Warranty

ALS3646

Top outlet, terminal connection.



AL3D2722

Bottom outlet, ENP plug.



AL3D2722

3D bending, 5m max*.


*ALS3646 4m max.

Full coverage of 3-10m wall washing height
Multiple angles available



5m

AL3D2722 : 3-5m

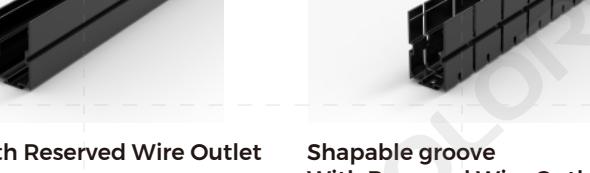

8m


ALS3646 : 5-8m

PRODUCT APPLICATION RECOMMENDATION



Public Buildings/Facade Wall Washing

Recommended models

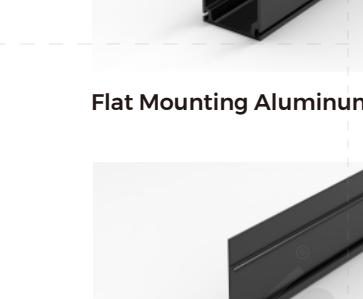

AL3D2722

Recommendation Reasons

Most facades are relatively high. Model AL3D2722: wall washing height 3-5m, moderate and versatile. Limited installation space and special-shaped installation surfaces. The product supports 3D bending for easy installation.

Outdoor use exposed to wind and sun. IP67 waterproof, unaffected by rain and short-term submersion.


High light control requirements. 25/35° wall washing angles available, can be paired with brackets to adjust detailed angles, meeting different lighting effect needs.

Difficult construction, installation and maintenance. Requires a complete product installation solution: flat mounting + (low) light shields, reserved wire outlets + high/low light barriers optional.


Accessories




Flat Mounting Aluminum Groove



Groove With Reserved Wire Outlet

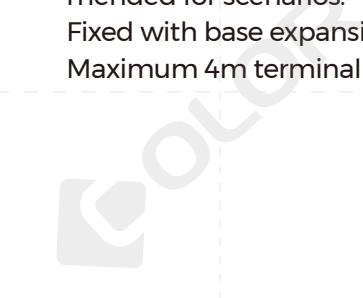

Shapable groove With Reserved Wire Outlet

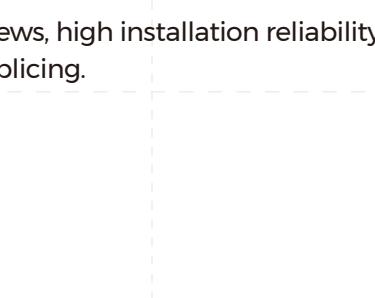

25° Shade With Reserved Wire Outlet

25° Shade with Flat Mounting Aluminum Groove

60° Shade with Reserved Wire Outlet



Garden Landscape Lighting

Recommended models



AL3D2722

Recommendation Reasons

Complex types of illuminated objects. Model AL3D2722: wall washing height 3-5m, moderate and versatile. Special-shaped/uneven installation surfaces or combination of top and side mounting. The product supports 3D bending for easy installation.

Outdoor use exposed to wind and sun. IP67 waterproof, unaffected by rain and short-term submersion.

High light control requirements. 25/35° wall washing angles available, can be paired with brackets to adjust detailed angles, meeting different lighting effect needs.

Difficult construction, installation and maintenance. Requires a complete product installation solution: flat mounting + (low) light shields, reserved wire outlets + high/low light barriers optional.

Accessories



Flat Mounting Aluminum Groove



Groove With Reserved Wire Outlet



Shapable groove With Reserved Wire Outlet



25° Shade With Reserved Wire Outlet



Column-Wrapping Wall Washing

Recommended models



ALS3646

Recommendation Reasons

High wall/washing height requirement. ALS3646: wall washer height 3-5m, moderate and versatile. Column-wrapping wall washing height. Outdoor use exposed to wind and sun. IP67 waterproof, unaffected by rain and short-term submersion. High light control requirements. 25/35° wall washing angles available, can be paired with brackets to adjust detailed angles, meeting different lighting effect needs.

Difficult construction, installation and maintenance. Requires a complete product installation solution: flat mounting + (low) light shields, reserved wire outlets + high/low light barriers optional.

Max 4m terminal wire splicing.

Model & Specifications



ALS3646



ALS3646

COLOR
2700K 3000K 3500K 4000K 6500K

5 years
IP67
>90 CRI
+50°C
-20°C

IP67

>90

CRI

+50°C

-20°C