
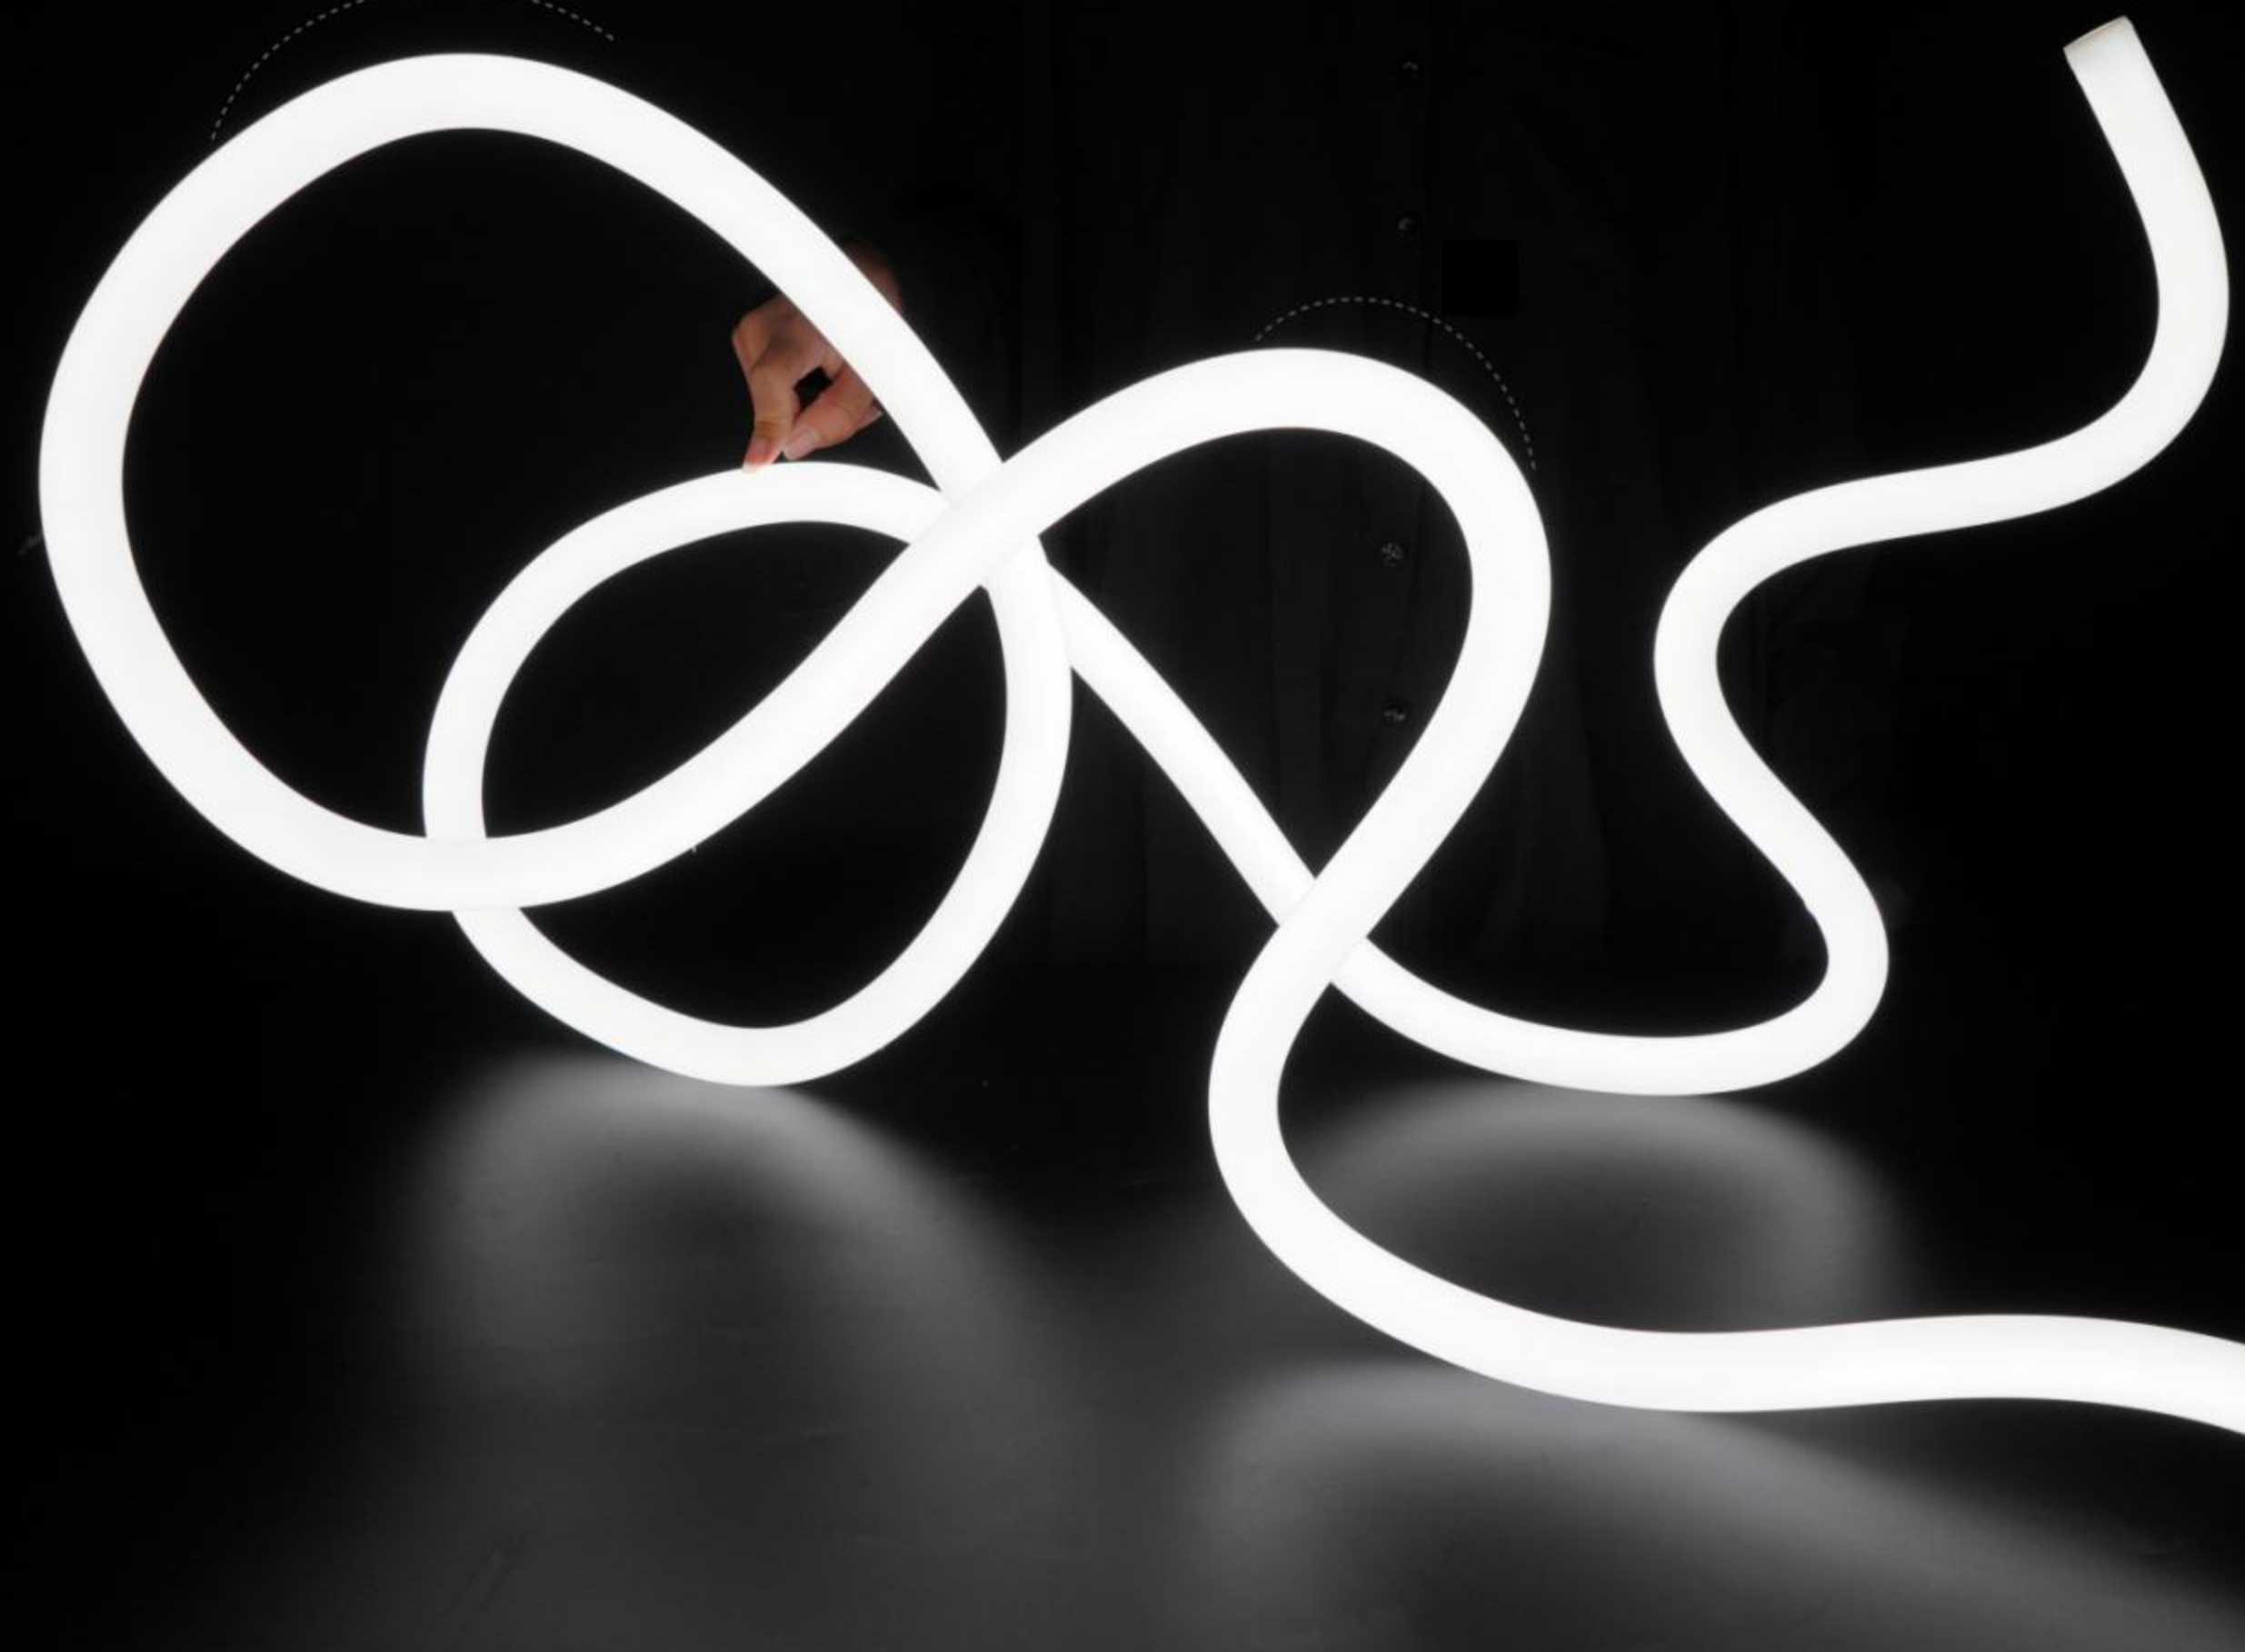


NNR25P NEW POSE-ABLE MODEL

POSE FOR BEAUTY

- Easy posing, flexible styling
- No dark area at end caps
- 360° glowing, full light look

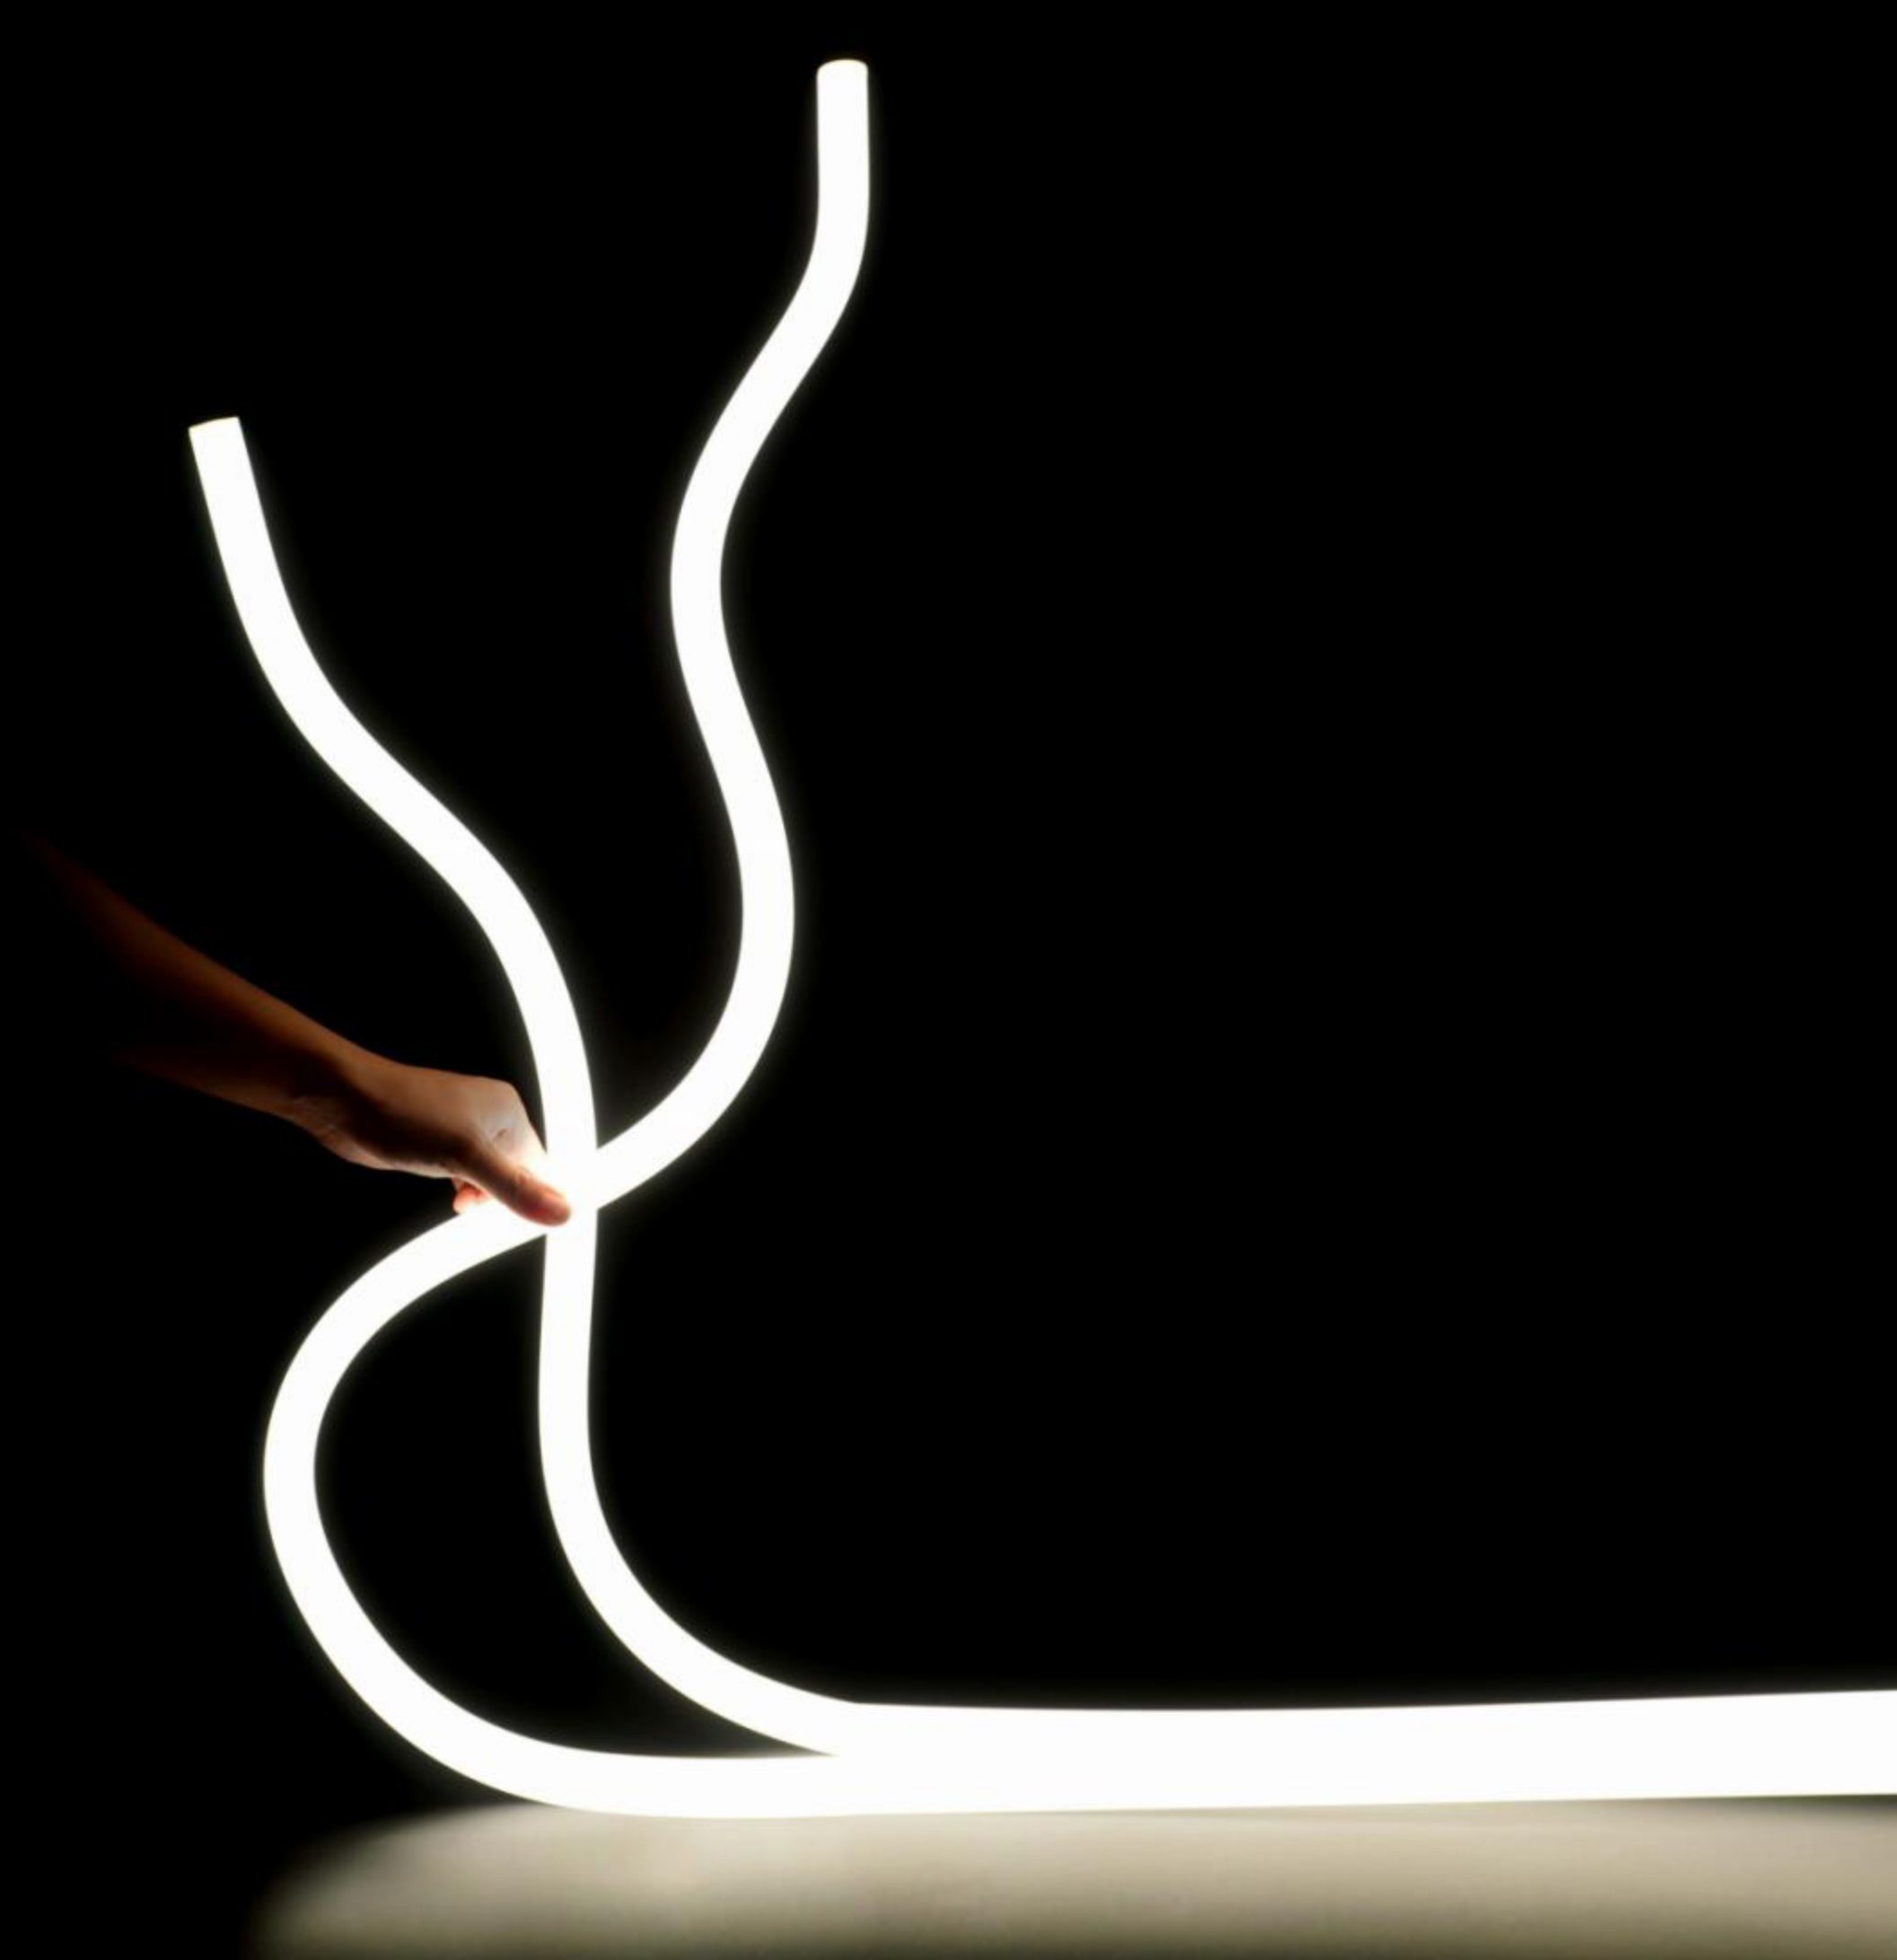

EASY POSING, FLEXIBLE STYLING

A certain firmness inside, no fixing tool required, bending is posing.



After splicing, you can bend it in another direction

FLEXIBLE COMBINATION INFINITE POSSIBILITIES


Splice long and bend in different directions, you get all kinds of shapes.

360° GLOWING, FULL LIGHT LOOK



NO DARK AREA AT END CAPS, LEVELED & AESTHETIC

Obvious dark area at end caps (on-market products)
Smooth light at end caps (our pose-able NNR25P)

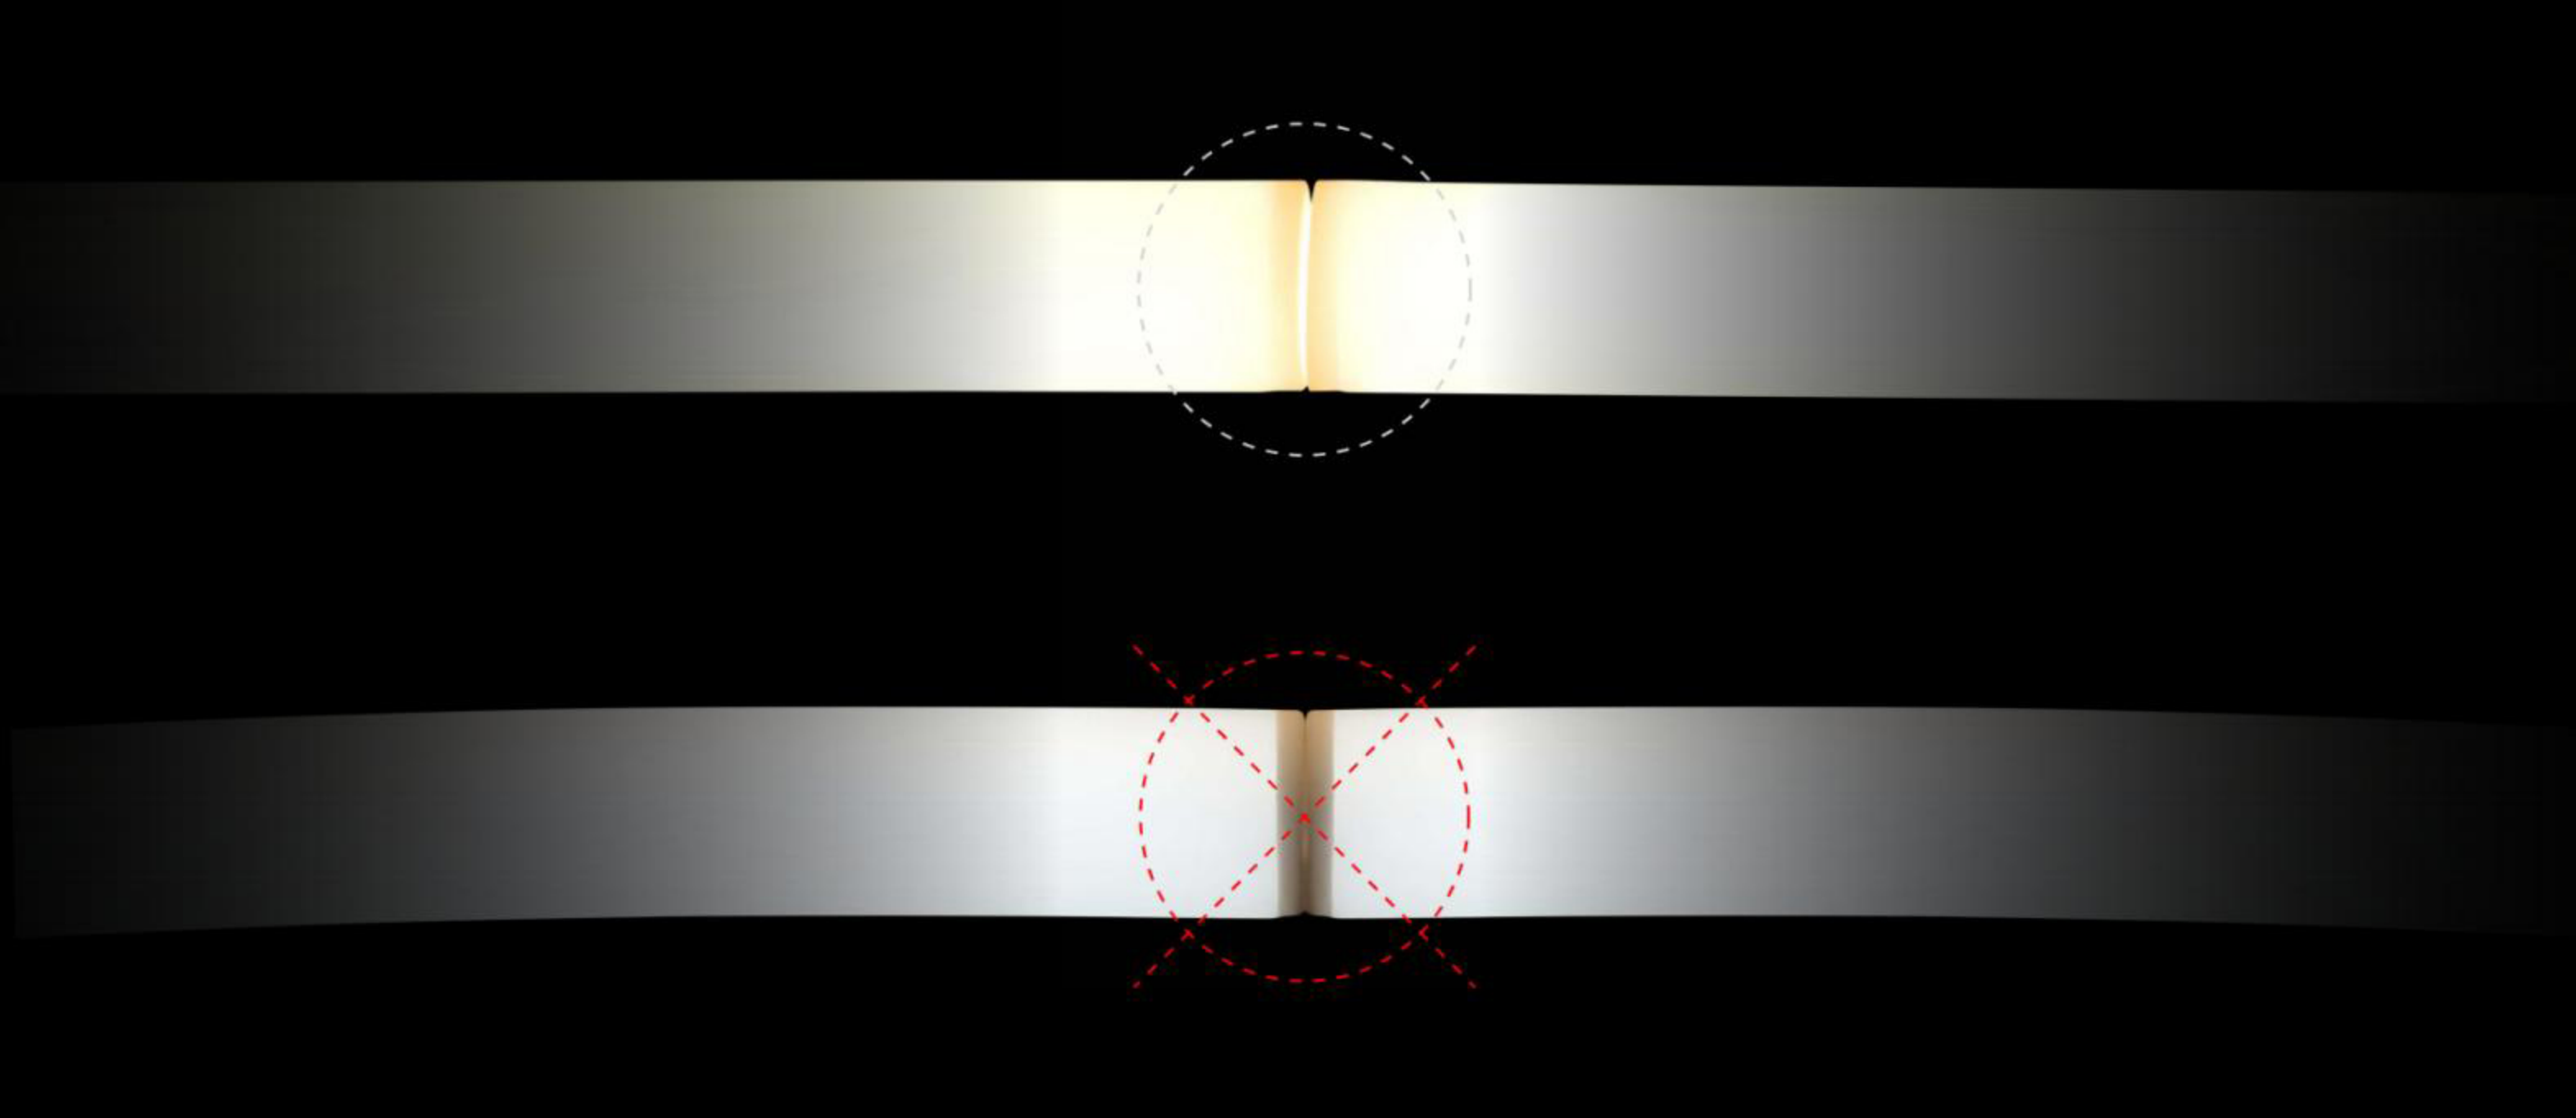


APPLICATION



PROCESS & WIRE-OUT METHOD

Silicone extrusion, straight and side wire-out optional
Standard size (5m/piece), support size customization

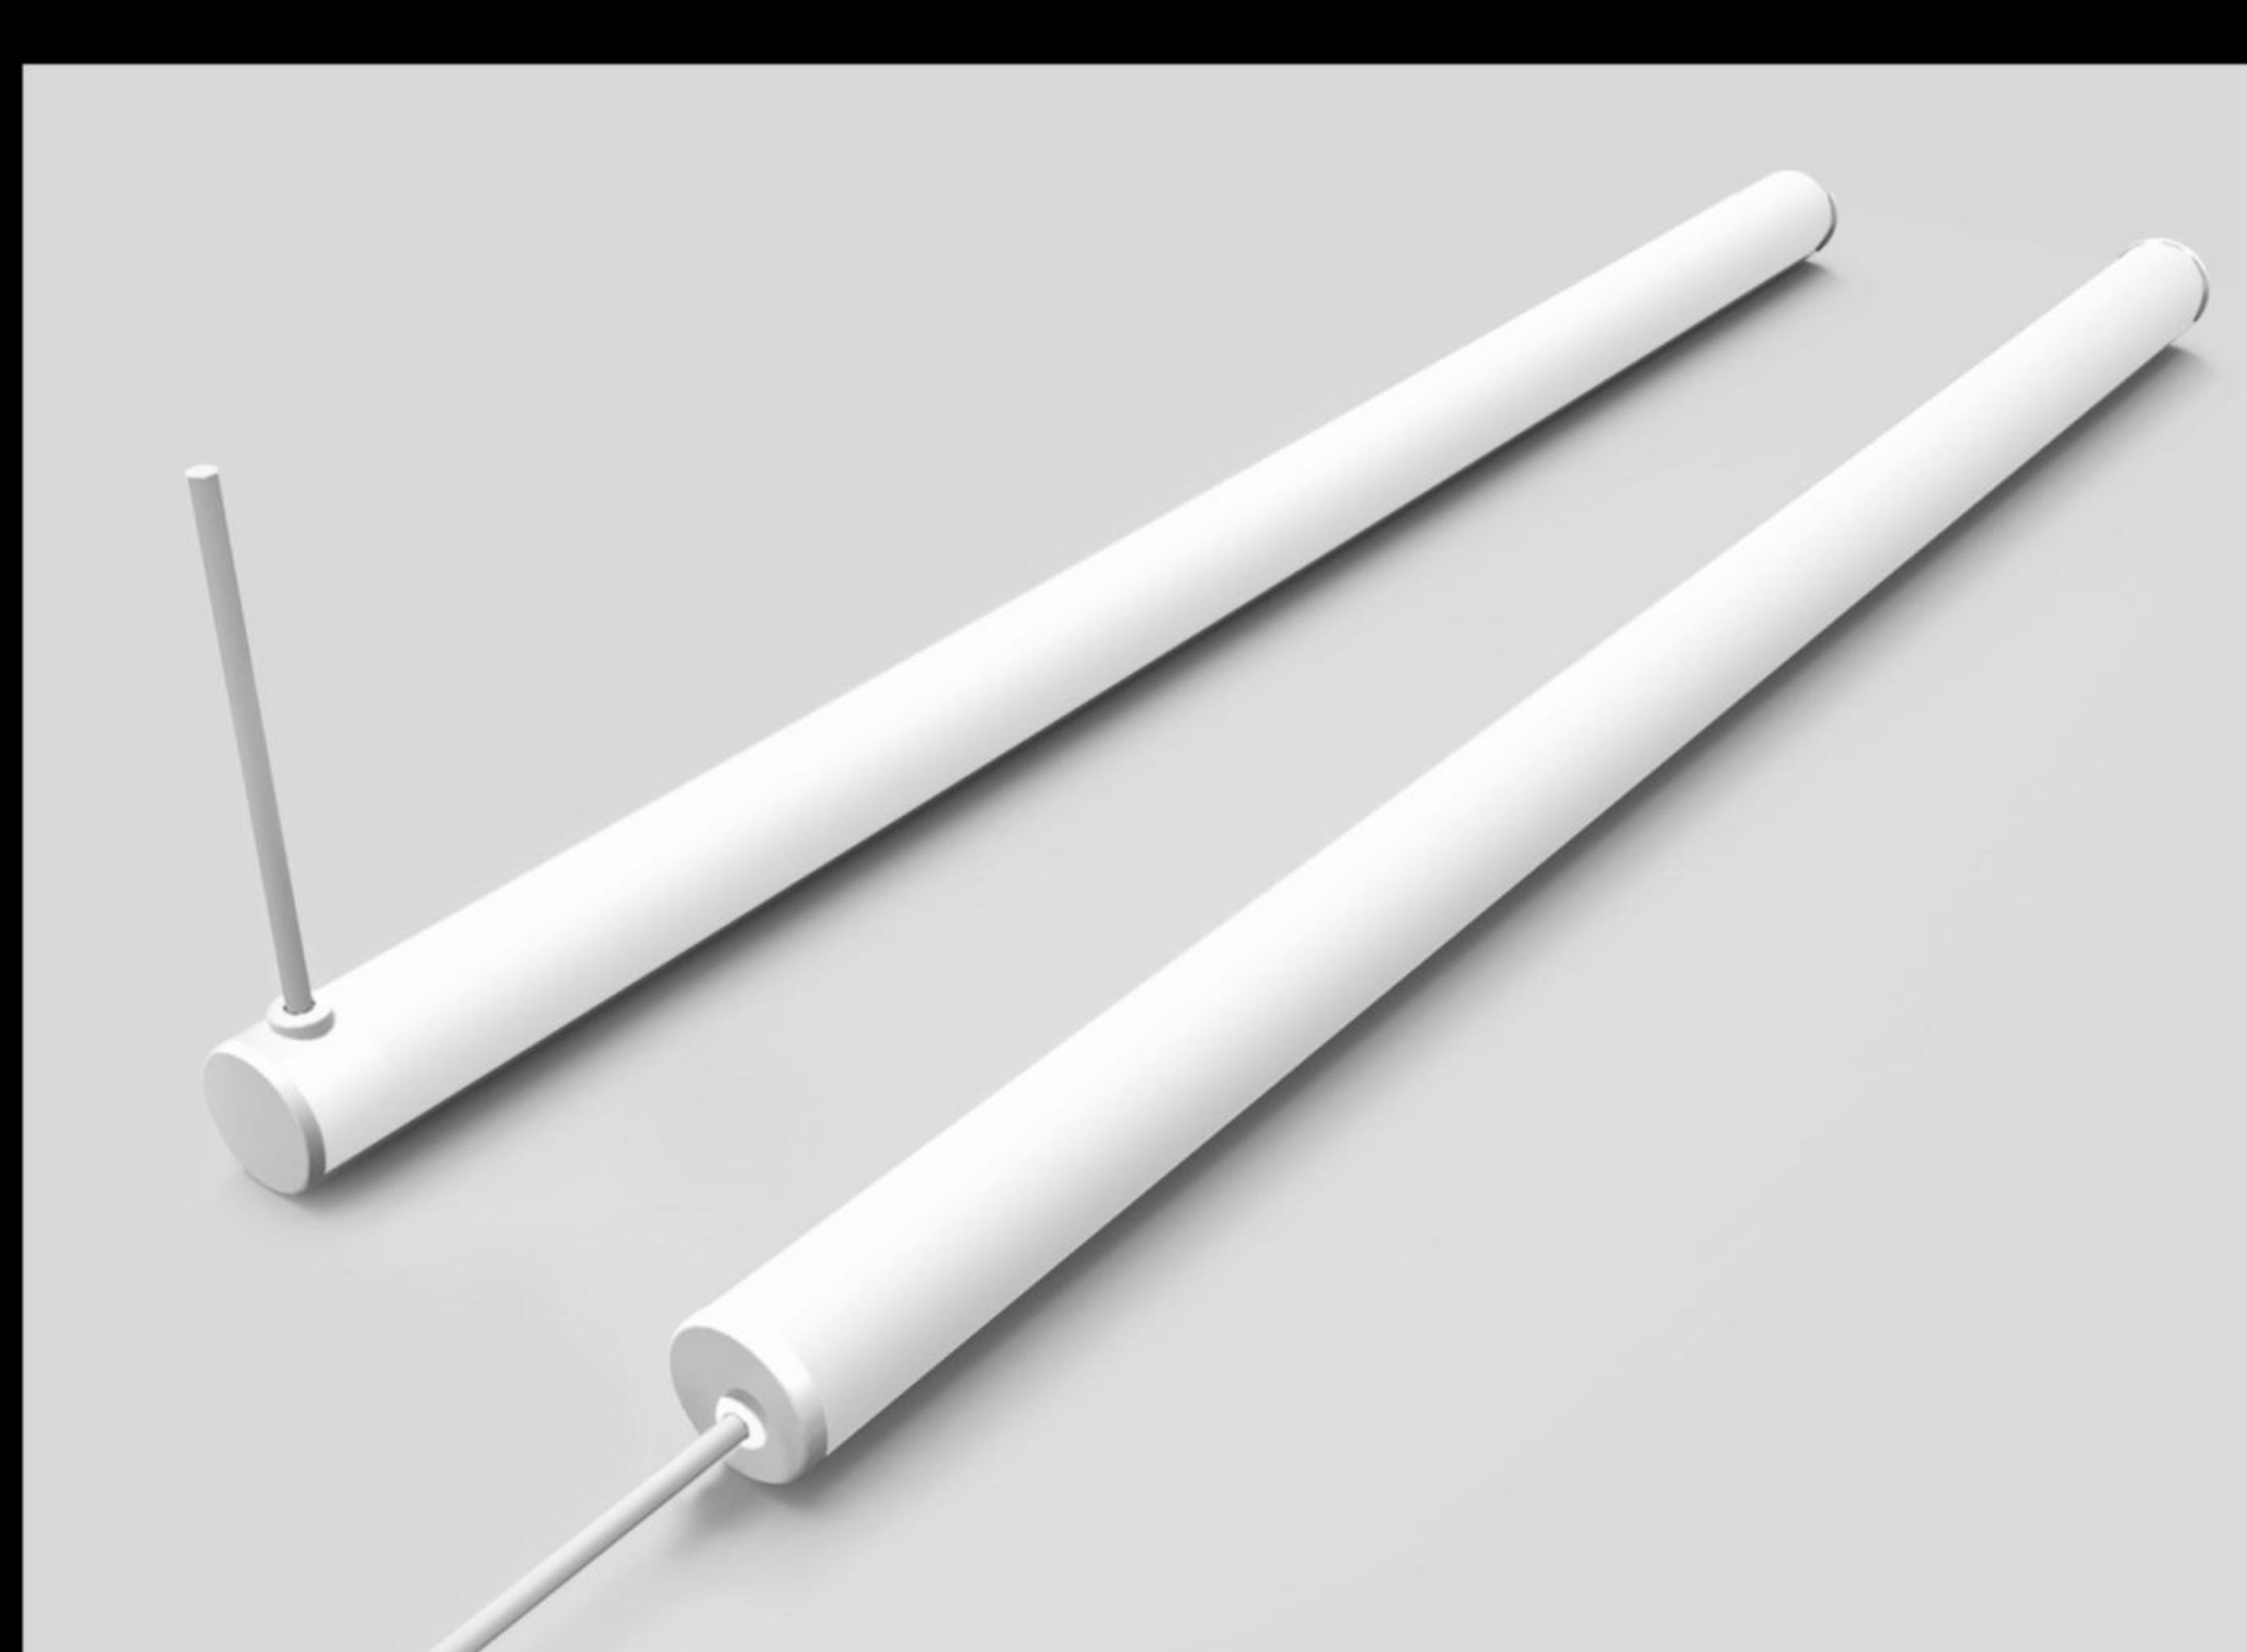

RECOMMENDED ACCESSORY

AS-NNR25DHS-XX	AS-NNR25DHX-0038	AS-NNR25LHX-0038
AS-NNR25LHX-0080	AS-NNR25PI-25	AS-NNR25VCC1-XX-2

PRODUCT PARAMETER

Model	Size	Voltage	Min. cutting unit	CCT/ color
NNR25P	5000/φ25	24V	Cannot be cut	2300K/2700K/3000K/4000K
	5000/φ25	48V	Cannot be cut	2300K/2700K/3000K/4000K

Max. power	Typ. power	Lumen(LM/m)	CRI	IP process
22.4 (6.83W/ft)	20 (6.08W/ft)	920(280/ft)/ 1100(335/ft)/ 1180(359/ft)/ 1140(347/ft)	>90	IP65
22.4 (6.83W/ft)	20 (6.08W/ft)	760(231/ft)/ 930(283/ft)/ 1000(304/ft)/ 960(292/ft)	>90	IP65

PACKAGE

5m/ reel 2 reels/ box

