


GENIE 2S



GENIE 2S


The GENIE 2S series boasts a sleek design with deep anti-glare features, 45° shading angle, and a slim 5mm bezel. It delivers excellent illumination, gentle yet powerful, with various optical options including a narrow 9° beam angle and high CRI of 90. Perfect for upscale hospitality and residential, its all-metal body ensures efficient heat dissipation while offering flexibility in installation, meeting designers' highest standards.

The all-metal body design ensures efficient heat dissipation, while the product's slim and delicate build allows for flexible adaptation, meeting designers' pursuit of ultimate application.

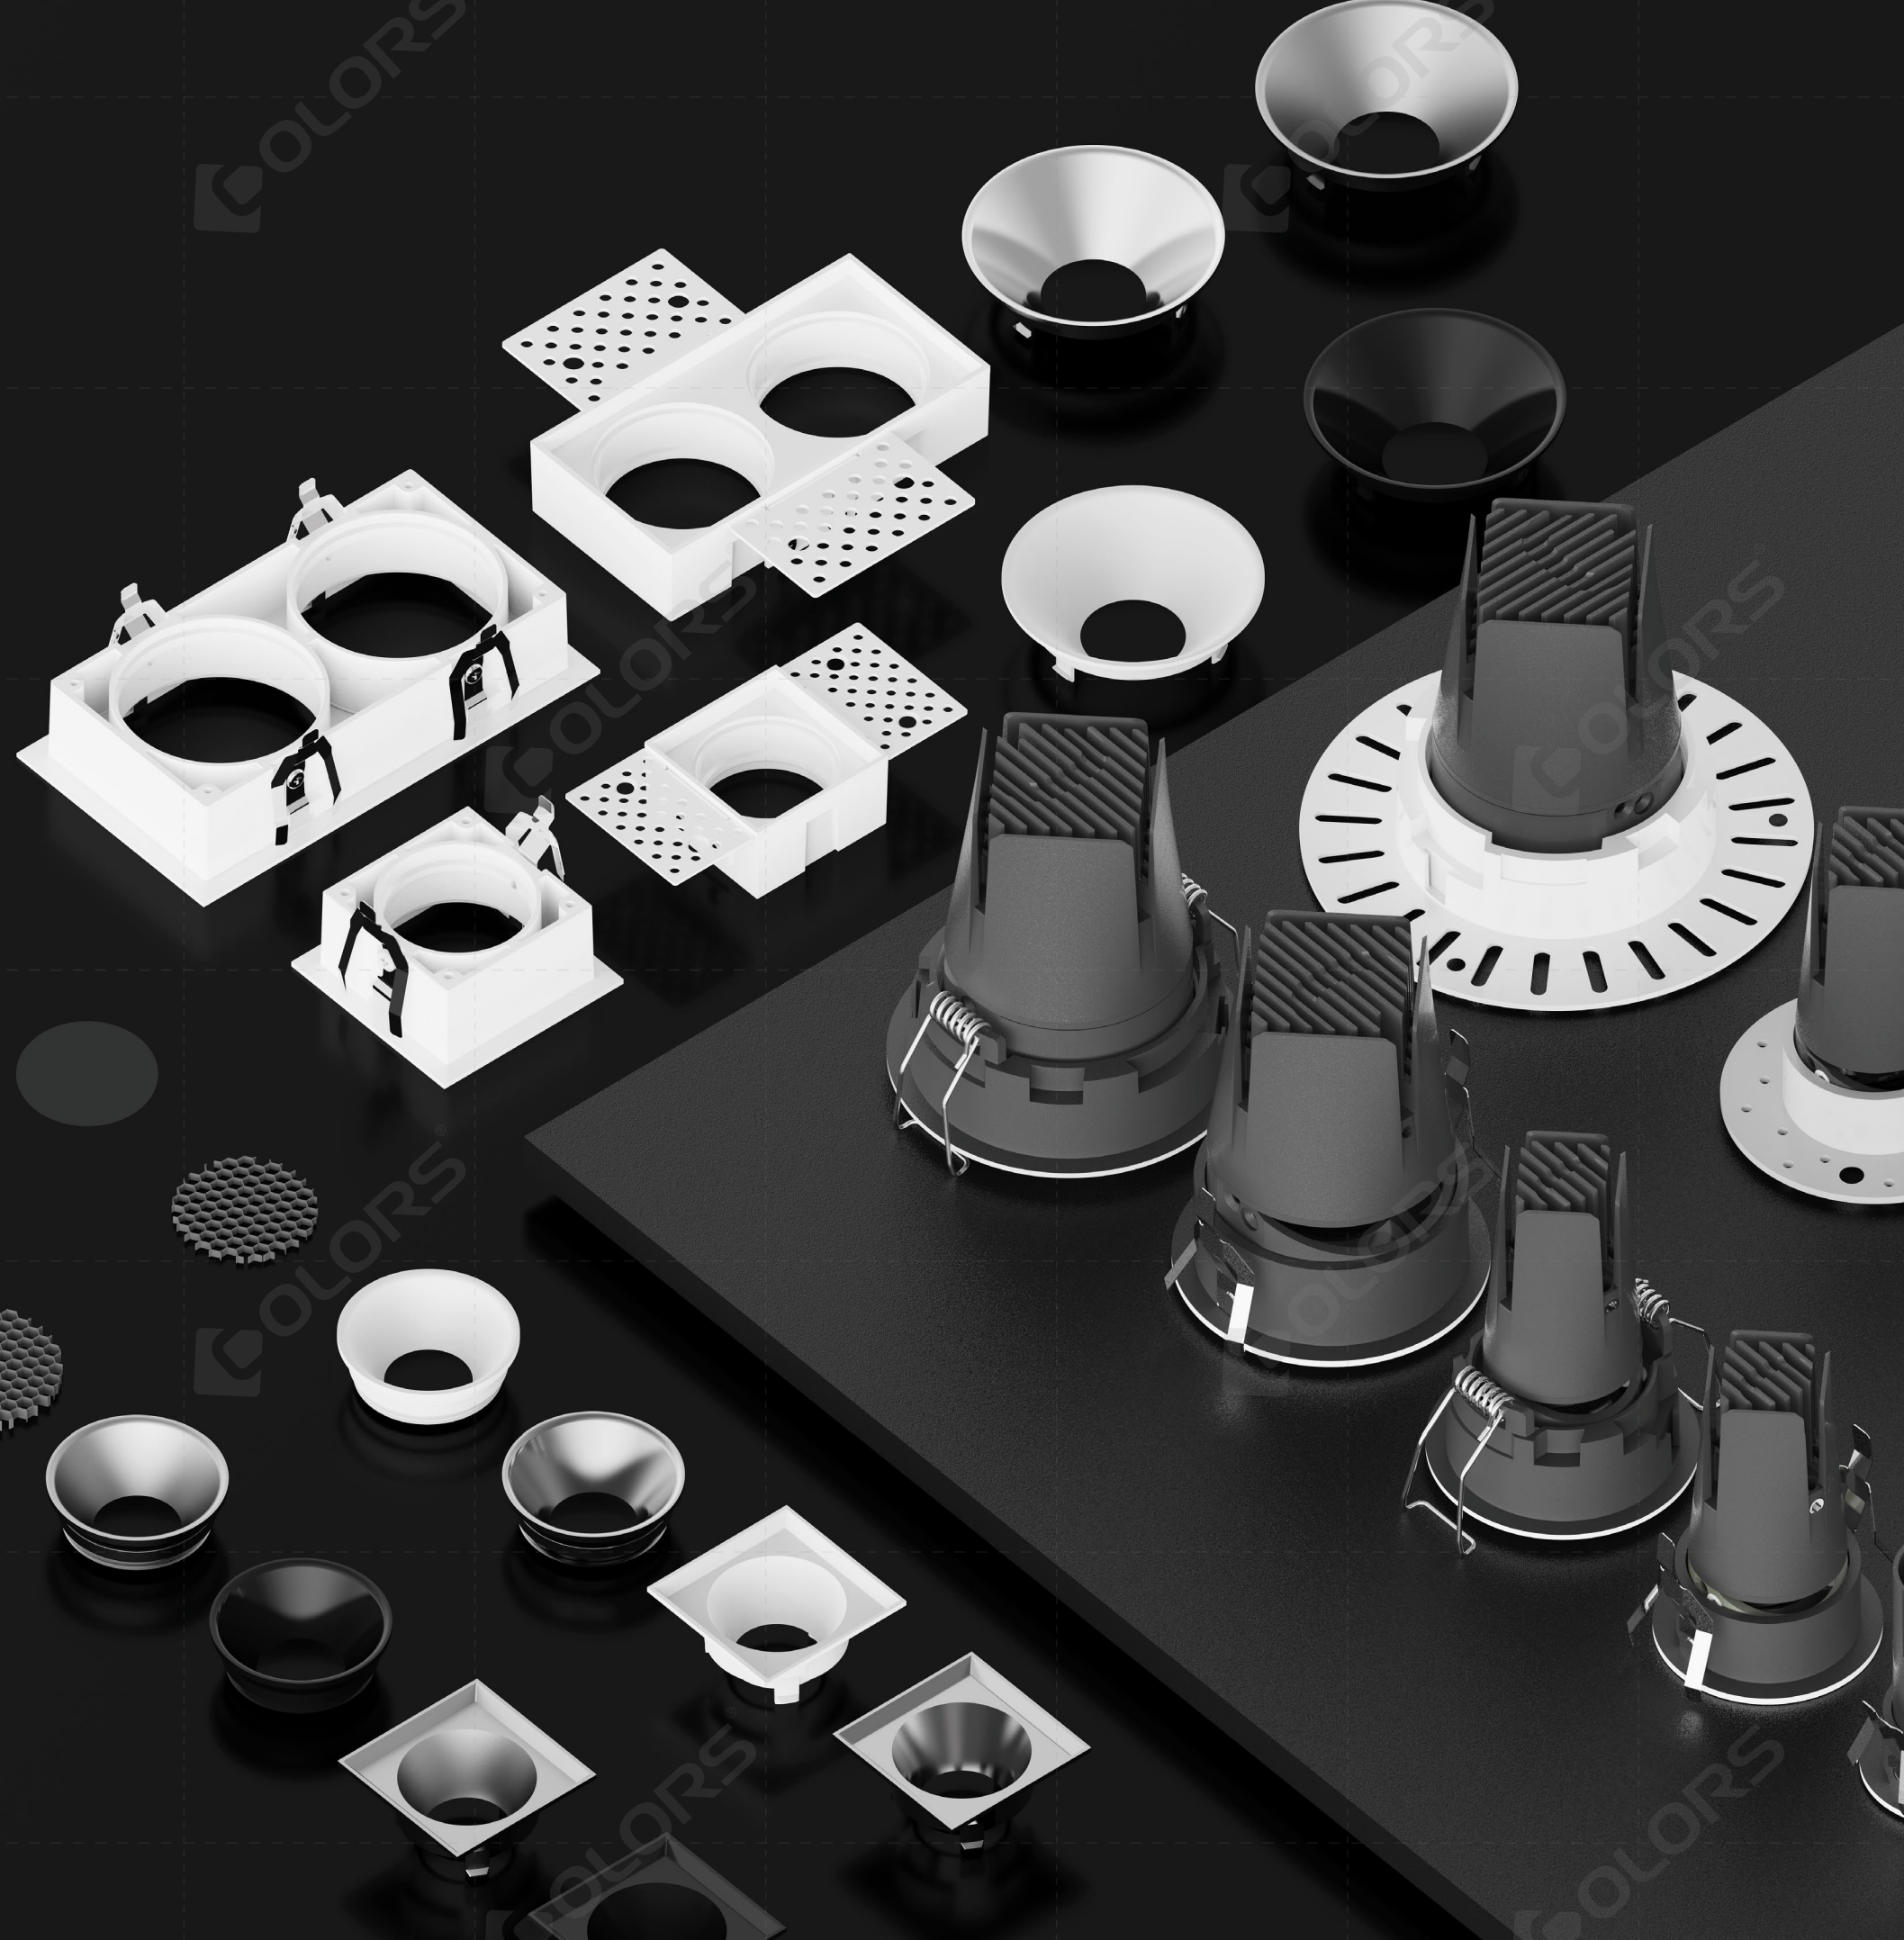

Exceptional industrial design

The perfect integration of architecture and products

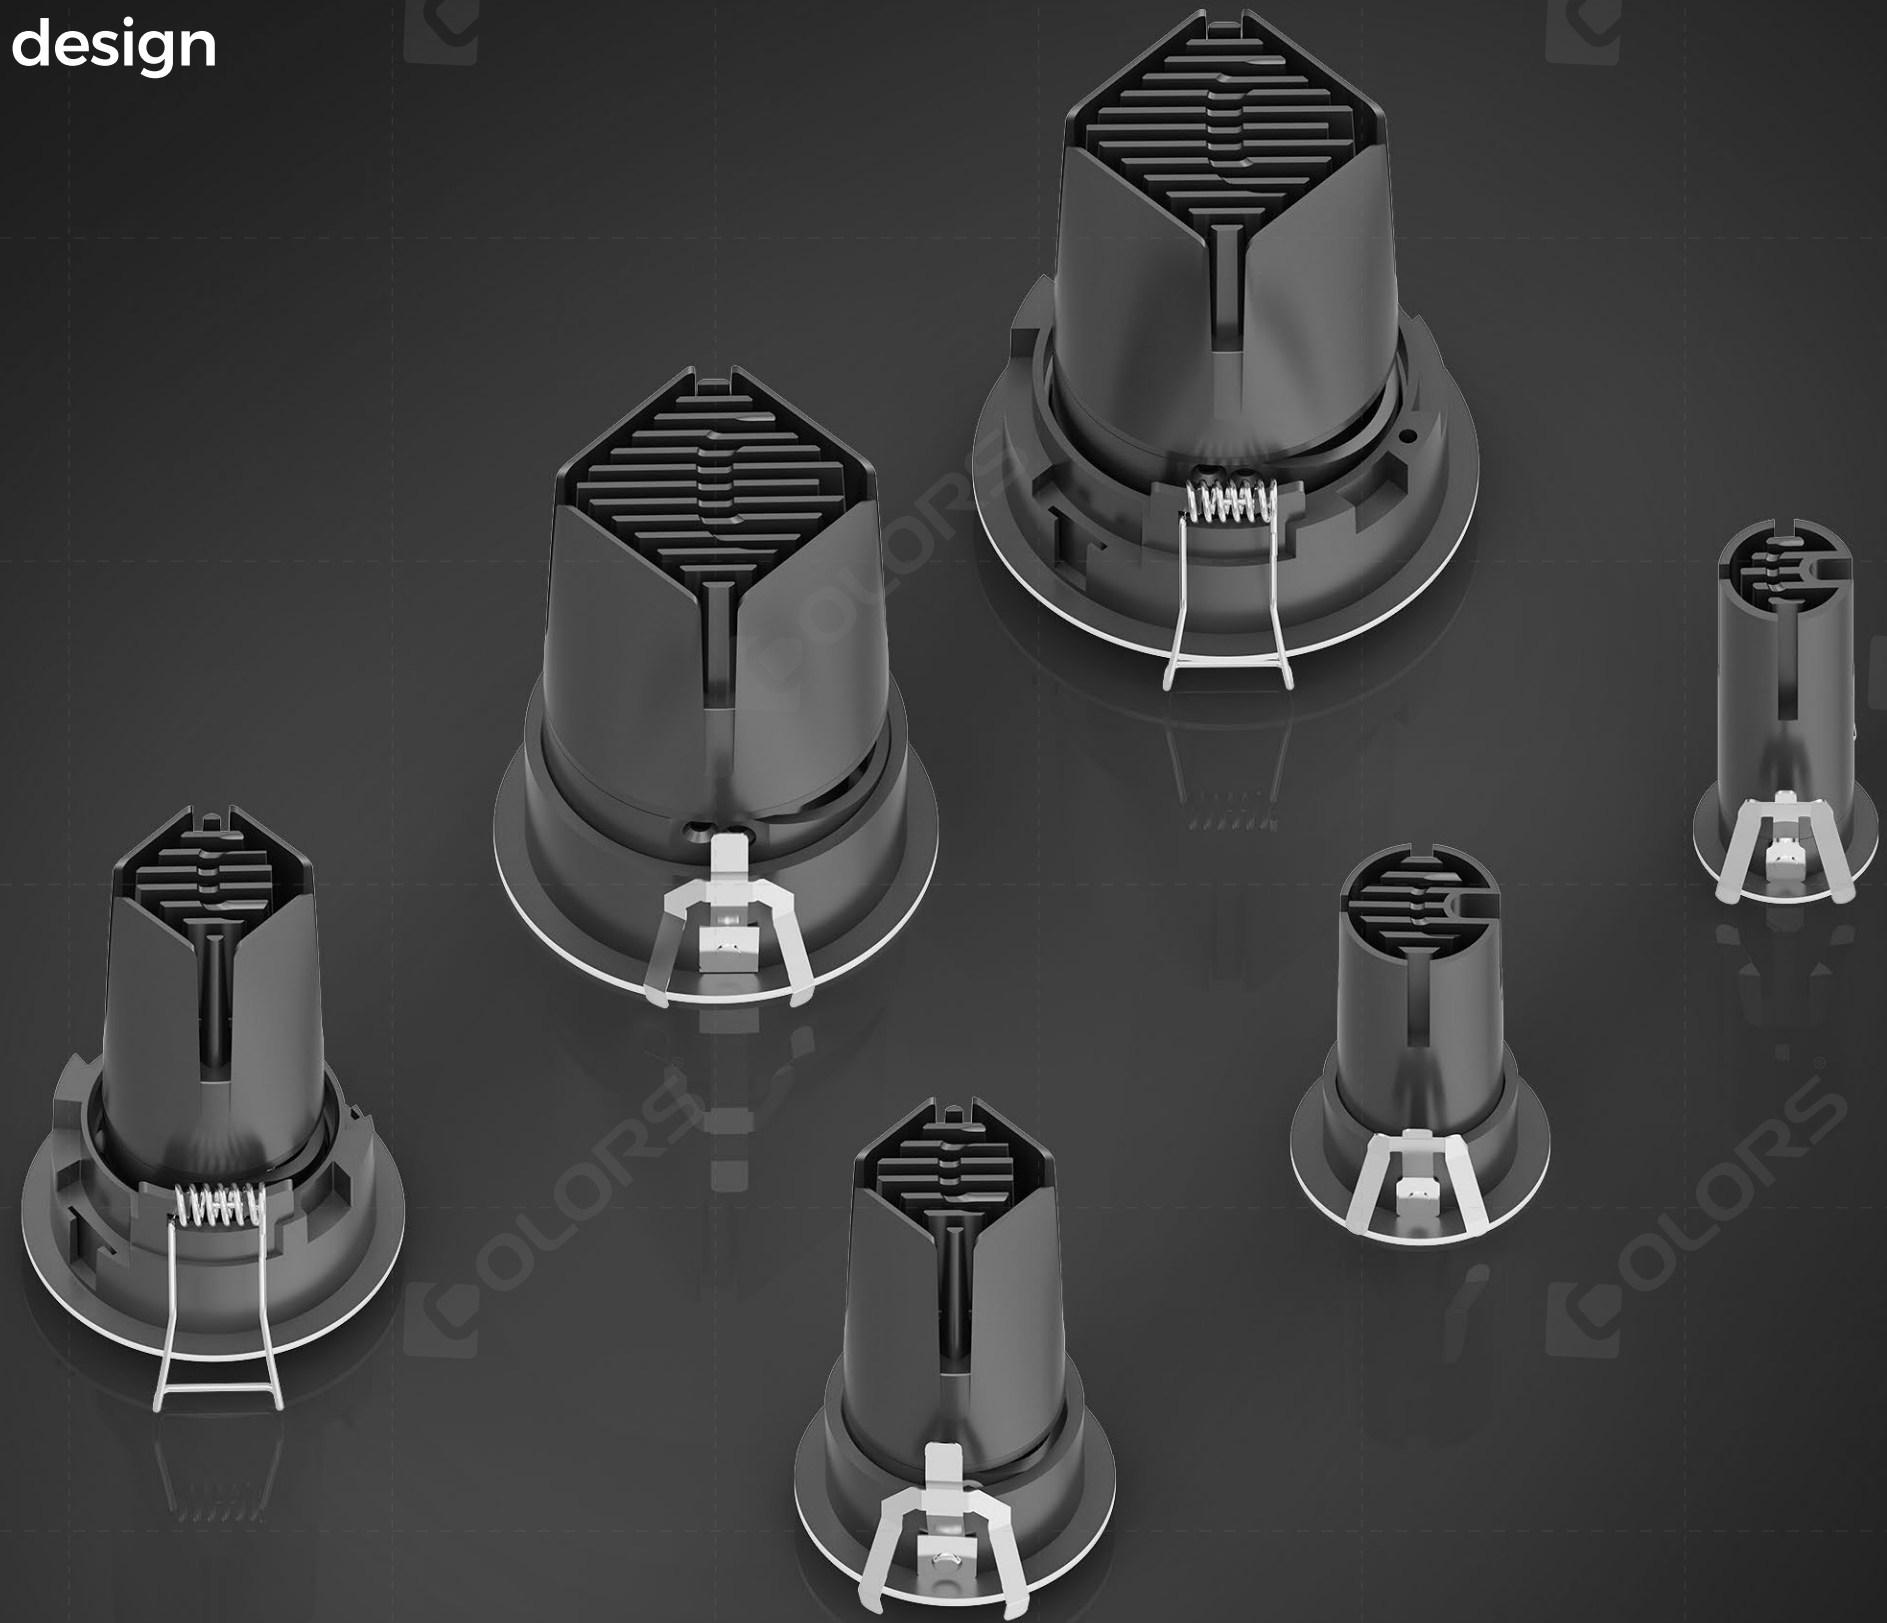

Choose Your Lighting Style

Square / Round

Trimless / Recessed

Fixed / Adjustable—tailor every detail to your space.

Fixed

Adjustable
(Round)

Adjustable
(Square)

25°

360°

Ultra narrow side ring

1.5_{mm}

5.0_{mm}



The Most Complete & Versatile Family of Lighting Solutions

Unrivalled in size diversity, power options, and application flexibility



Product Details

1. Radiator

High-quality die-casting aluminum, good heat dissipation, oil spraying process on the surface

2. COB light source

High CRI, CRI90, CCT 2700K / 3000K / 3500K / 4000K / 2700k-6500k


2700 K 3000 K 3500 K 4000 K Tunable White

3. Light source bracket

Use high quality PC material to fix the COB light source, so that the light source and the heat sink are close to each other to enhance heat dissipation and stabilize the use.

4. Optical lens

Using imported PC material, higher light transmittance

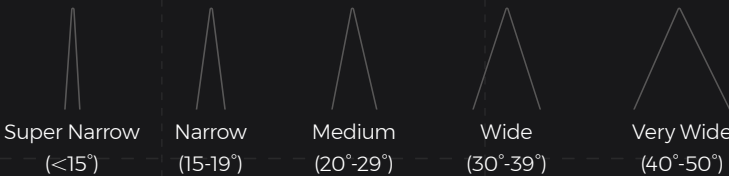

5. Central

Parts for connecting the lamp body with a pendulum angle of 0-25° and for connecting the lamp body with a horizontal rotation of 360°

6. Reflector

Available in a total of 4 colors, matte black, matte white, mirror, black chrome



7. Mounting Shrapnel

High-quality 304 stainless steel, able to adapt to 5-20MM ceiling

8. Frame

Borderless and edged optional, black and white optional

Control Systems
On/Off
DALI
0/1-10V
TRIAC

Four-way Convection
All-metal Body Small Body
Big Power

15W




Rigorous Thermal Design Management


Longer luminaire life, reliable and stable quality Stronger heat dissipation ability



Led Downlight Heat Dissipation Simulation

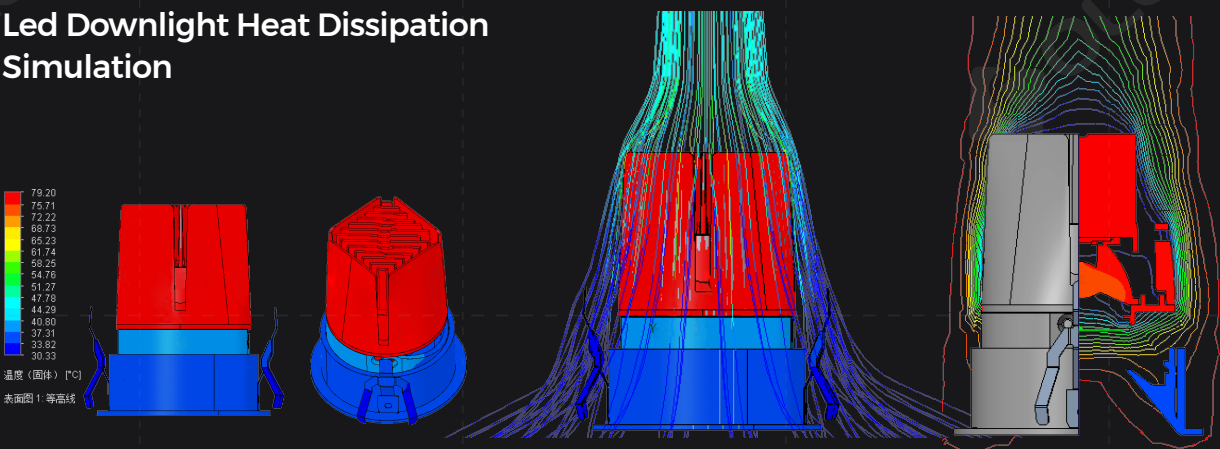

Curve Of Tc Point Temperature After Lighting

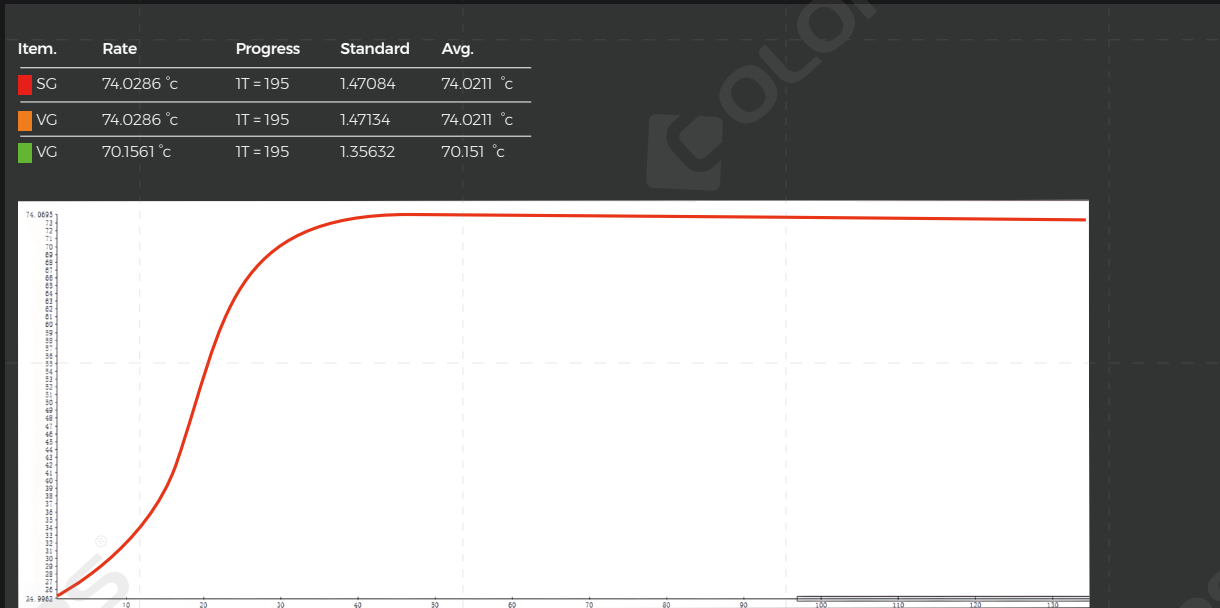

Split Design



Easy Installation

The frame can be installed independently, and the luminaire can be easily secured to the frame using spring balls.




Easy maintenance

When replacing the light source, the main body can be easily detached without damaging the ceiling.




Free combination


The luminaire is compatible with both recessed and non-decorative recessed frames, making it very inventory-friendly.




Mirror




Black Chrome



Matte Black




Matte White



Mirror



Black Chrome



Matte Black



Matte White


Light-emitting surface
IP54 waterproof



Multiple product types




Vertical 90°
Horizontal 355°

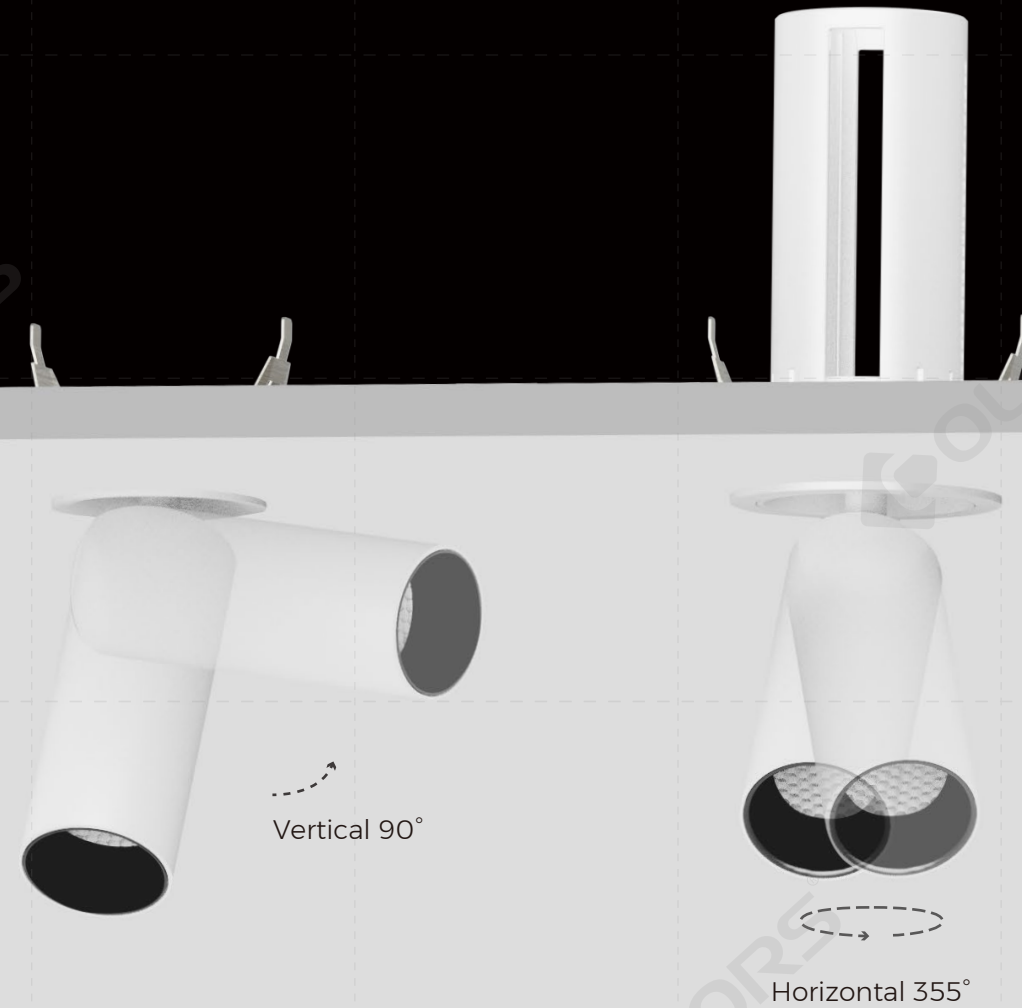


Patented Lens Design

Using cross-light-path topology and reconstructing free-form optical systems, precise light field control is achieved via ray tracing algorithms.

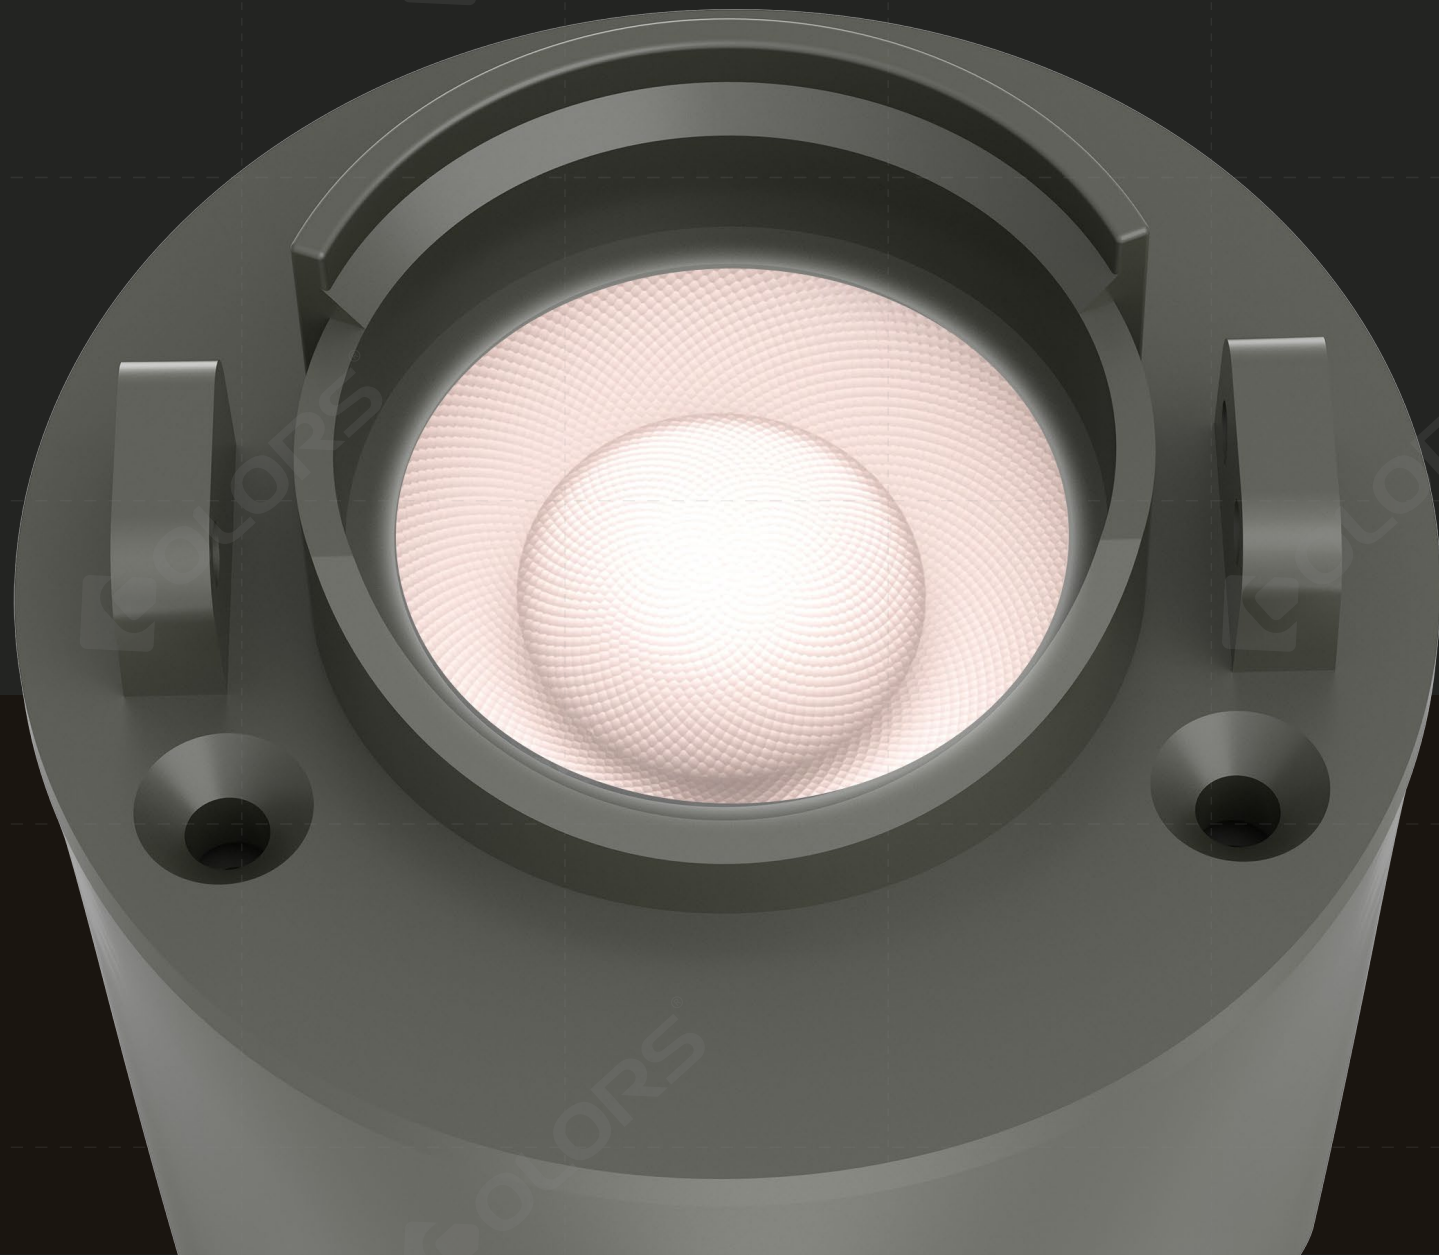

Deep Anti-glare Dark Light Technology Minimum UGR ≤ 1

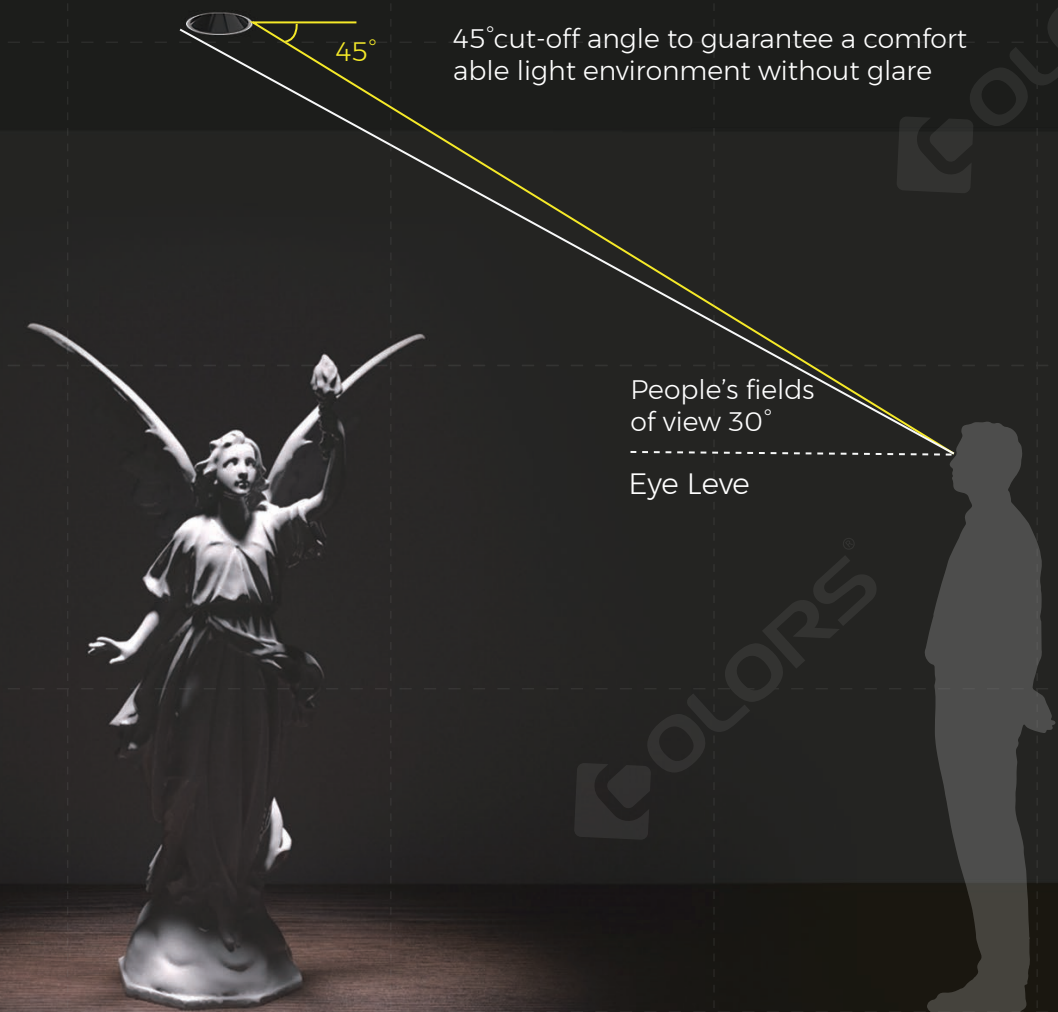


Proprietary Optical Design for a Soft
Pure Glow



Adjust The Brightness And CCT For Individual Application

White and bright to warm and dim, tunable white gives character to its environment

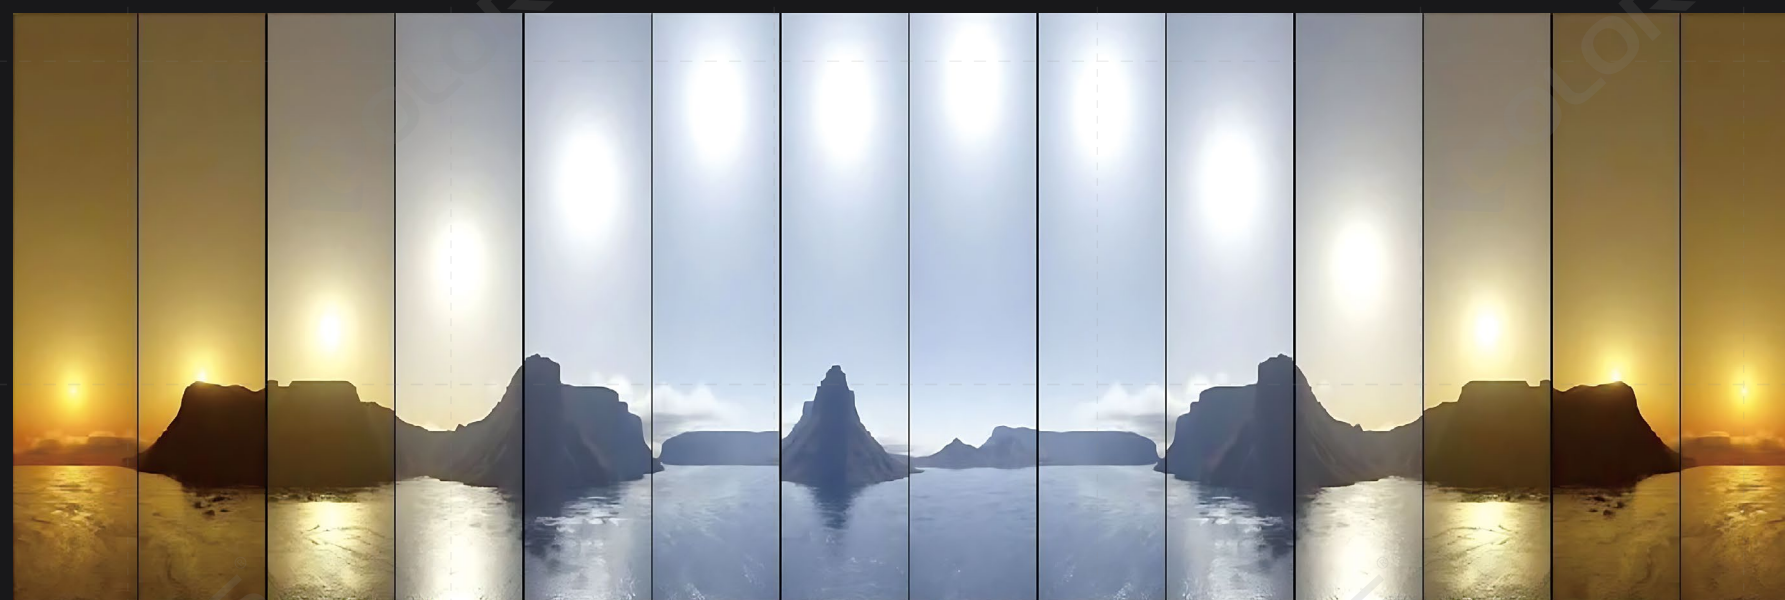

Sunrise

Morning

Noon

Afternoon

Sunset

<2000K

<2000K

5500-6500K

3500-4500K

<2000K

6500K



2700K

1%

100%



SKU	Version	Opening	Power	Input Current	Output voltage	Input Current(LED)	CRI	CCT	Beam angle	luminous efficacy (lm/w)	Luminous flux(lm)	SDCM	UGR
G2SE25L1(E)	/	φ25mm	6W	220-240V	36V	120mA	90	3000K	24°	40	240	≤3	≤8
				220-240V	36V	120mA	90	3000K	36°	43	260	≤3	≤16
G2SE35L1(E) G2SR35L1(E)	/	φ35mm	6W	220-240V	36V	120mA	90	3000K	15°	38	230	≤3	≤13
				220-240V	36V	120mA	90	3000K	24°	42	255	≤3	≤13
				220-240V	36V	120mA	90	3000K	36°	38	230	≤3	≤19

SKU	Version	Opening	Power	Input Current	Output voltage	Input Current(LED)	CRI	CCT	Beam angle	luminous efficacy (lm/w)	Luminous flux(lm)	SDCM	UGR	
G2SE45L2(E) G2SR45L2(E) G2SE50S1(E) G2SR50S1(E) G2SE55L2(E) G2SR55L2(E)	Normal	G2SE45L2(E): φ45mm G2SR45L2(E): φ45mm G2SE50S1(E): 50x50mm G2SR50S1(E): 50x53mm G2SE55L2(E): φ55mm G2SR55L2(E): φ55mm	6W	220-240V	36V	150mA	90	3000K	15°	40	240	≤3	≤6	
				220-240V	36V	150mA	90	3000K	24°	56	335	≤3	≤3	
				220-240V	36V	150mA	90	3000K	36°	57	340	≤3	≤10	
				220-240V	36V	150mA	90	3000K	45°	57	340	≤3	≤19	
			9W	220-240V	36V	200mA	90	3000K	24°	51	460	≤3	≤3	
				220-240V	36V	200mA	90	3000K	36°	52	470	≤3	≤10	
				220-240V	36V	200mA	90	3000K	45°	52	470	≤3	≤19	
					220-240V	36V	150mA	90	2700K	28°	45	270	≤3	≤6
	CCT Tunable		6W	220-240V	36V	150mA	90	2700K	36°	45	270	≤3	≤13	
				220-240V	36V	150mA	90	4000K	28°	55	330	/	≤6	
				220-240V	36V	150mA	90	4000K	36°	55	330	/	≤13	
				220-240V	36V	150mA	90	6500K	28°	52	310	≤3	≤6	
				220-240V	36V	150mA	90	6500K	36°	52	310	≤3	≤13	
				220-240V	36V	200mA	90	2700K	28°	40	360	≤3	≤8	
			9W	220-240V	36V	200mA	90	2700K	36°	40	360	≤3	≤13	
				220-240V	36V	200mA	90	4000K	28°	50	450	/	≤8	
				220-240V	36V	200mA	90	4000K	36°	50	450	/	≤13	
				220-240V	36V	200mA	90	6500K	28°	48	430	≤3	≤8	
				220-240V	36V	200mA	90	6500K	36°	48	430	≤3	≤13	

Note:
For G2SE50S2(E) / G2SR50S2(E):

Power & Luminous Flux: 2× the values stated above.
Opening: 96×50mm (1st model) / 95×53mm (2nd model).

SKU	Version	Opening	Power	Input Current	Output voltage	Input Current(LED)	CRI	CCT	Beam angle	luminous efficacy (lm/w)	Luminous flux(lm)	SDCM	UGR
			9W	220-240V	36V	200mA	90	3000K	9°	24	215	≤3	≤6
				220-240V	36V	200mA	90	3000K	15°	55	500	≤3	≤0
				220-240V	36V	200mA	90	3000K	24°	68	610	≤3	≤0
				220-240V	36V	200mA	90	3000K	36°	70	630	≤3	≤6
				220-240V	36V	200mA	90	3000K	50°	64	575	≤3	≤19
G2SE65L2(E) G2SR65L2(E) G2SE70S1(E) G2SR70S1(E) G2SE75L2(E) G2SR75L2(E)	Normal		12W	220-240V	36V	300mA	90	3000K	9°	22	265	≤3	≤6
				220-240V	36V	300mA	90	3000K	15°	53	635	≤3	≤0
				220-240V	36V	300mA	90	3000K	24°	66	800	≤3	≤0
				220-240V	36V	300mA	90	3000K	36°	68	815	≤3	≤6
				220-240V	36V	300mA	90	3000K	50°	63	760	≤3	≤19
			15W	220-240V	36V	350mA	90	3000K	24°	61	915	≤3	≤0
				220-240V	36V	350mA	90	3000K	36°	63	945	≤3	≤6
				220-240V	36V	350mA	90	3000K	50°	58	870	≤3	≤19
			9W	220-240V	36V	200mA	90	2700K	24°	42	380	≤3	≤6
				220-240V	36V	200mA	90	2700K	36°	43	390	≤3	≤10
				220-240V	36V	200mA	90	2700K	50°	40	365	≤3	≤19
				220-240V	36V	200mA	90	4000K	24°	60	540	/	≤6
				220-240V	36V	200mA	90	4000K	36°	62	560	/	≤10
				220-240V	36V	200mA	90	4000K	50°	58	520	/	≤19
				220-240V	36V	200mA	90	6500K	24°	53	475	≤3	≤6
				220-240V	36V	200mA	90	6500K	36°	54	490	≤3	≤10
				220-240V	36V	200mA	90	6500K	50°	51	460	≤3	≤19
				220-240V	36V	300mA	90	2700K	24°	41	490	≤3	≤6
CCT Tunable			12W	220-240V	36V	300mA	90	2700K	36°	42	505	≤3	≤10
				220-240V	36V	300mA	90	2700K	50°	39	470	≤3	≤19
				220-240V	36V	300mA	90	4000K	24°	58	700	/	≤6
				220-240V	36V	300mA	90	4000K	36°	60	720	/	≤10
				220-240V	36V	300mA	90	4000K	50°	56	670	/	≤19
				220-240V	36V	300mA	90	6500K	24°	51	615	≤3	≤6
				220-240V	36V	300mA	90	6500K	36°	53	635	≤3	≤10
				220-240V	36V	300mA	90	6500K	50°	49	590	≤3	≤19
			15W	220-240V	36V	350mA	90	2700K	24°	37	555	≤3	≤6
				220-240V	36V	350mA	90	2700K	36°	38	570	≤3	≤10
				220-240V	36V	350mA	90	2700K	50°	37	555	≤3	≤19
				220-240V	36V	350mA	90	4000K	24°	52	780	/	≤6

SKU	Version	Opening	Power	Input Current	Output voltage	Input Current(LED)	CRI	CCT	Beam angle	luminous efficacy (lm/w)	Luminous flux(lm)	SDCM	UGR
G2SE65L2(E) G2SR65L2(E) G2SE70S1(E) G2SR70S1(E) G2SE75L2(E) G2SR75L2(E)	CCT Tunable	G2SE65L2(E): Φ65mm G2SR65L2(E): Φ65mm G2SE70S1(E): 70x70mm G2SR70S1(E): 70x73mm G2SE75L2(E): Φ75mm G2SR75L2(E): Φ75mm	15w	220-240V	36V	350mA	90	4000K	36°	56	840	/	≤10
				220-240V	36V	350mA	90	4000K	50°	52	780	/	≤19
				220-240V	36V	350mA	90	6500K	24°	46	690	≤3	≤6
				220-240V	36V	350mA	90	6500K	36°	49	735	≤3	≤10
				220-240V	36V	350mA	90	6500K	50°	46	690	≤3	≤19

Note:
For G2SE70S2(E) / G2SR70S2(E):

Power & Luminous Flux: 2× the values stated above.
Opening: 136×70mm (1st model) / 135×73mm (2nd model).

SKU	Version	Opening	Power	Input Current	Output voltage	Input Current(LED)	CRI	CCT	Beam angle	luminous efficacy (lm/w)	Luminous flux(lm)	SDCM	UGR
G2SE35SR2(E) G2SE45SR2(E) G2SE45SS2(E) G2SE55SS2(E)	/	G2SE35SR2(E): Φ35mm G2SE45SR2(E): Φ45mm G2SE45SS2(E): Φ45mm G2SE55SS2(E): Φ55mm	6W	220-240V	36V	120mA	95	3000K	15°	50	300	≤3	≤13
				220-240V	36V	120mA	95	3000K	24°	53	315	≤3	≤13
				220-240V	36V	120mA	95	3000K	36°	56	335	≤3	≤16



LED LINEAR &
COMMERCIAL
LIGHTING



Tel: +86-755-2923-1888

E-mail: colors@colorsled.com

Web: www.colorsled.com

Add: 17F, Block B, Building 2, North of Skyworth

Inno Valley, Shiyan town, Bao'an District, Shenzhen