GIANT

The GIANT series downlight is available in a range of sizes (from ϕ120mm to ϕ170mm), with a maximum wattage of 60W and a maximum installation distance of 10m. It is suitable for airports, subway stations, as well as other large-scale transportation hubs and high-ceiling public spaces.

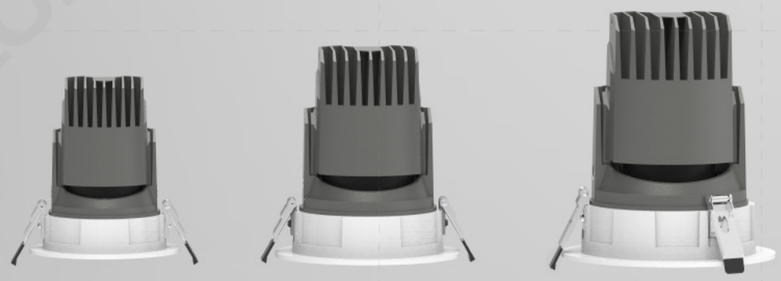







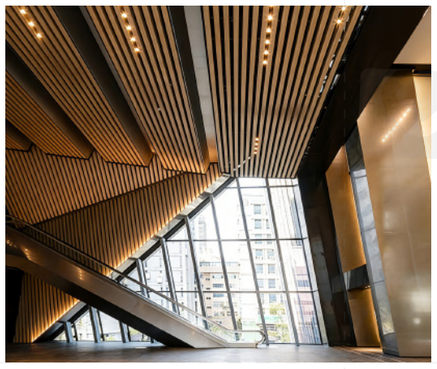

High Power with Adjustable Swing Angle

Multiple Beam Angles Reflectors Available

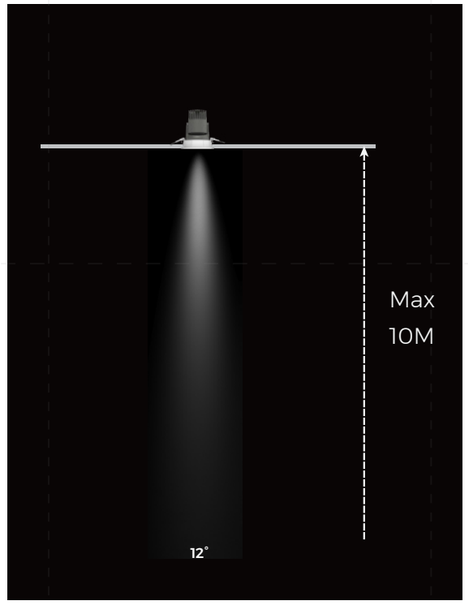

Ultra-Narrow Angle 12° Maximum Mounting Height 10m

SKU	Opening	Power	Input Voltage	Output Voltage	Input Current(LED)	CRI	CCT	Beam Angle	luminous Efficacy (lm/w)	Luminous Flux (lm)	SDCM	UGR
GTE120L2	Φ120mm	35W	220-240V	36V	850mA	>90	3000K	28°	70	2450	≤3	≤0
			220-240V	36V	850mA	>90	3000K	40°	70	2450	≤3	≤8
			220-240V	36V	850mA	>90	3000K	50°	60	2100	≤3	≤14
GTE145L2	Φ145mm	30W	220-240V	36V	750mA	>90	3000K	12°	60	1800	≤3	≤0
		50W	220-240V	36V	1250mA	>90	3000K	24°	65	3250	≤3	≤0
			220-240V	36V	1250mA	>90	3000K	38°	65	3250	≤3	≤13
			220-240V	36V	1250mA	>90	3000K	50°	60	3000	≤3	≤0
GTE170L2	Φ170mm	30W	220-240V	36V	750mA	>90	3000K	12°	60	1800	≤3	≤4
		60W	220-240V	36V	1500mA	>90	3000K	24°	63	3780	≤3	≤3
			220-240V	36V	1500mA	>90	3000K	38°	63	3780	≤3	≤0
			220-240V	36V	15000mA	>90	3000K	50°	60	3600	≤3	≤10