



H-Track

High-voltage track system



H-Track

High-voltage track system

The H-Track series is a 220V high-voltage track system compatible with spotlights, linear lights and decorative light modules. It delivers a maximum luminous efficacy of 135 LM/W and a Color Rendering Index (CRI) of 90, providing bright illumination with true-to-life color reproduction. Additionally, a dial-switch version (with adjustable color temperature and power) is available, allowing flexible light temperature adjustment to meet the needs of different scenarios.

Product Overview

Spotlight Modules-High Luminous efficiency



HTSR-80
φ 80*70mm
25W



HTSR-105
φ 105*90mm
35W

Spotlight Modules-ECO



EHS-55
φ 55*130mm
15W



EHS-80
φ 80*130mm
30W

Spotlight Modules-PRO



HS-45
φ 45*100mm
8W



HS-62
φ 62*130mm
10W/15W



HS-73
φ 73*148mm
20W/25W



HS-90
φ 90*160mm
30W

Spotlight Modules-Zoom



HSZ-55
φ 55*155mm
15W



HSZ-65
φ 65*165mm
25W

Linear Modules



HTFD
43*105*460mm 22W
43*105*912mm 44W



HTFP
43*105*460mm 22W
43*105*912mm 44W



HTGG
43*105*460mm 20W
43*105*912mm 40W




HCD
φ 30*600mm
14W



HG(A)
220*85mm
12W

Decorative Modules



HI-30
φ 30*300mm
7W



HIJ-30
φ 30*530mm
7W



HNK-25
φ 25*1000/2500mm
13W /33W



HIB-110
φ 110mm
5W




HIB-110(B)
φ 110mm
5W

High Luminous Efficiency
130LM/W CRI90



Ultra-Deep Anti-Glare Technology
Protecting Visual Health and Enhancing Long-Term Comfort

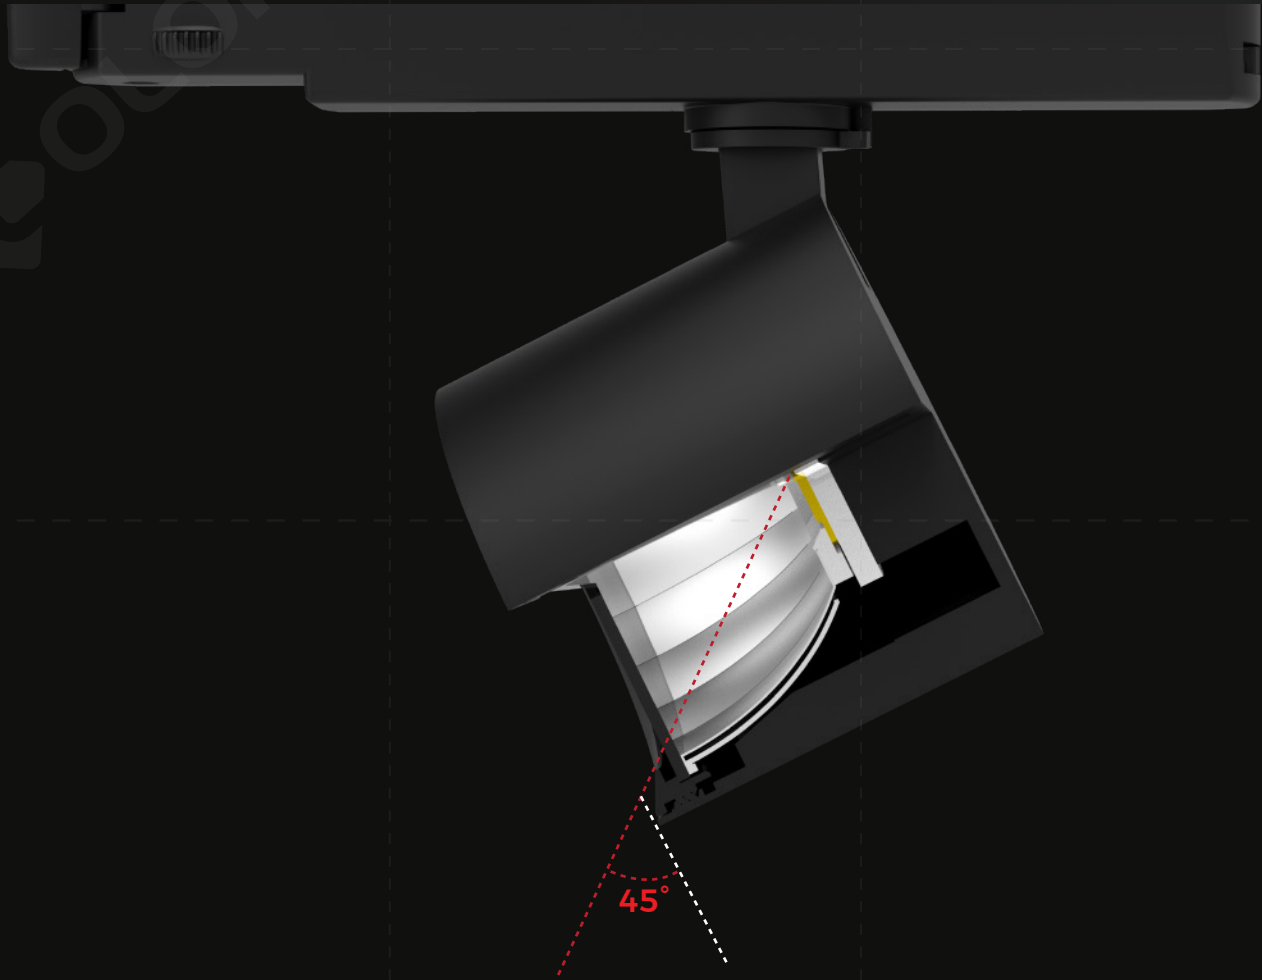

45° cut-off angle to guarantee a comfortable
light environment without glare

Comprehensive Optical Accessories

The newly upgraded track light provides a series of integrated accessories:
snoot that alter the lamp's appearance, accessories enhancing anti-glare performance such as honeycomb.


High Luminous Efficiency





High Luminous Efficiency
+
Honeycomb



Deep Anti-Glare

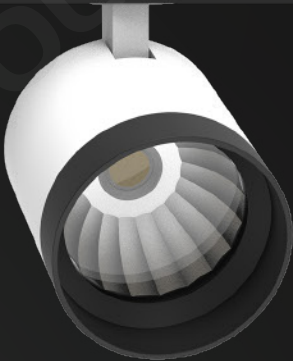


Deep Anti-Glare
+
Honeycomb

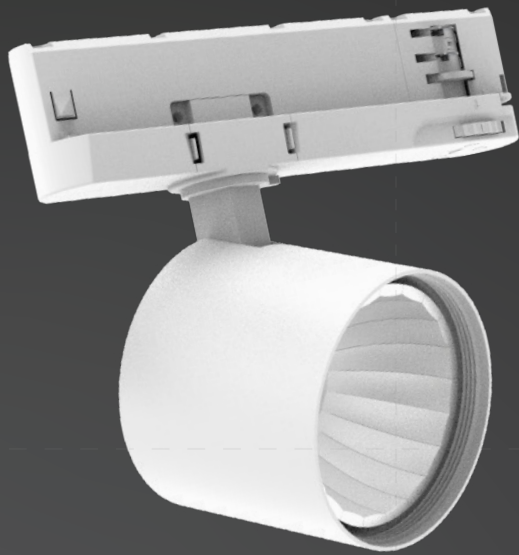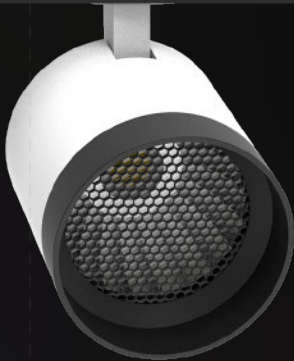

Glass



Honeycomb



Low anti-glare shield



High anti-glare shield




The Most Complete & Versatile Family of Lighting Solutions

8° Extremely Narrow Beam Angle, 6 Types Of Power



One Light Adapts To Various Applications

Adjustable with 3 power levels and 3 color temperature levels

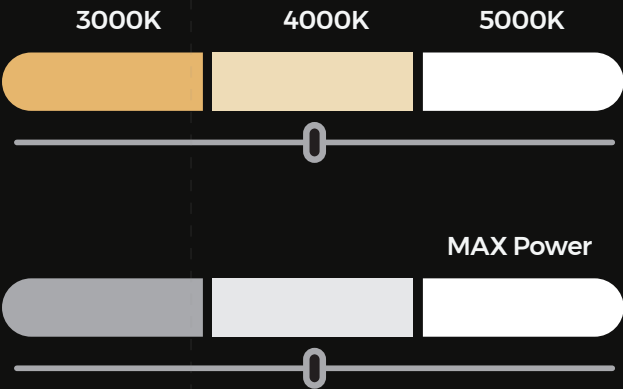


HTSR-80



HTSR-105



Linear Modules
350° Rotatable, 90° Pivotable

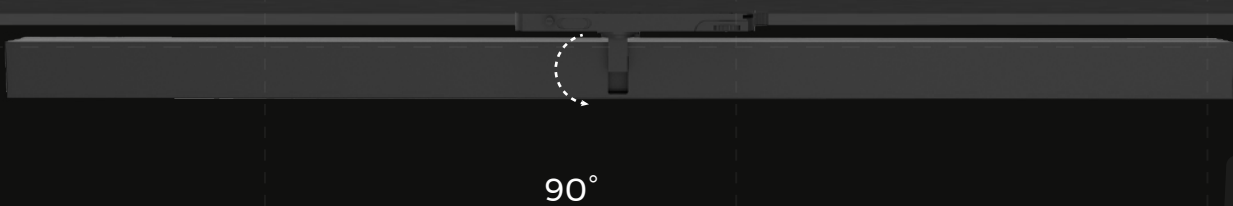


High Luminous Efficacy With
Multiple Optical Options

Diffuser
Up to 135LM/W



Prismatic
Up to 130LM/W




Grating
Up to 120LM/W




Track

Ceiling / Pendant track

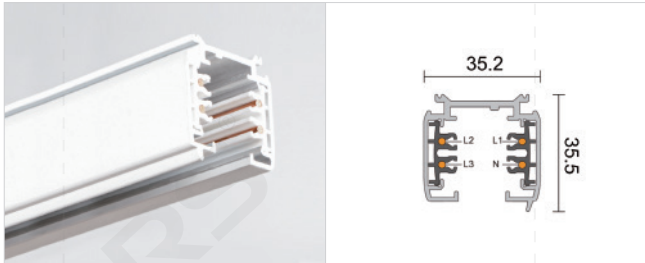

PRO-04X0
Installation: ceiling/pendant
Material: AL6063-T5
Coating: Black/White
Size: L1000/2000/3000*W35.2
*H35.5mm/

Rated current: 16A
Maximum load: 3500W
Input voltage: AC220V

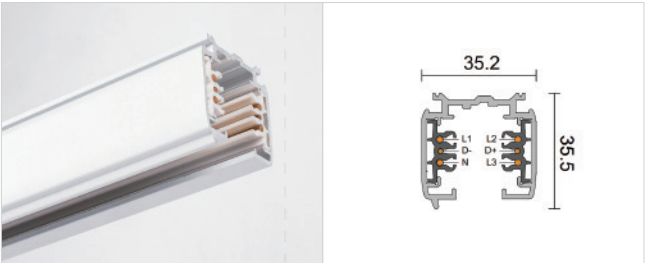

PRO-06X0
Installation: ceiling/pendant
Material: AL6063-T5
Coating: Black/White
Size: L1000/2000/3000*W35.2
*H35.5mm

Rated current: 16A
Maximum load: 3500W
Input voltage: AC220V

Accessory



Four Left power connector
Model: PRO-0431L
Size: 98*35*35mm



Four / six-wire End cap
Model: PRO-0432
Size: 31*35*35mm



Four wire "I" shape power connector
Model: PRO-0433
Size: 68*21*35mm



Four-wire L connector
Model: PRO-0435L
Size: 100*100*35mm



Six Left power connector
Model: PRO-D631L
Size: 139*35*35mm



Six wire "I" shape power connector
Model: PRO-D633
Size: 107*21*35mm



Six-wire L power connector
Model: PRO-D635L
Size: 119*119*35mm



Pendant rod accessory
Model: PRO-EZ0447
Rod length: 1000mm




Pendant rope accessory
Model: PRO-EZ0448
Rope length: 1500mm



Eco Track (4-wire)

Ceiling / Pendant track

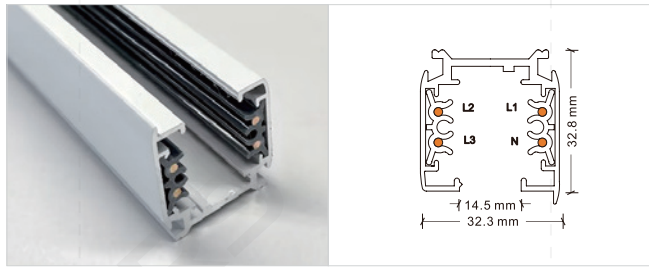

ECO-04X0

Installation: ceiling/pendant

Material: AL6063-T5

Coating: Black/White

Size: L1000/2000/3000*W32.3


*H32.8mm

Rated current: 16A

Maximum load: 3500W

Input voltage: AC220V

Accessory

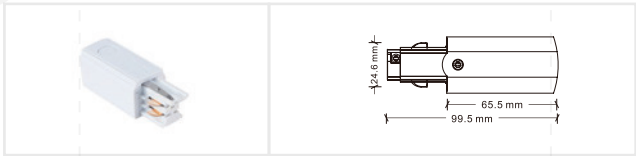


Left power connector

Model: ECO-0431L

Size: 99.5*32.8*32.3mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

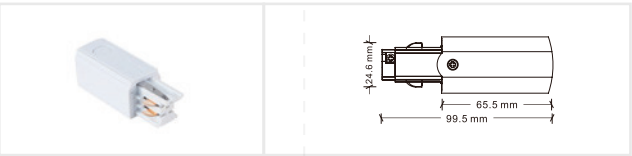


Right power connector

Model: ECO-0431R

Size: 99.5*32.8*32.3mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

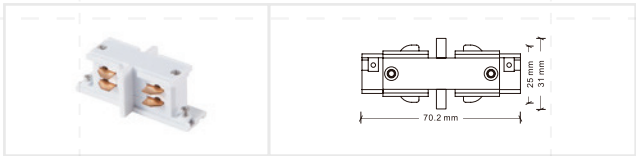


I-shape power connector

Model: ECO-0433

Size: 70.2*25*31mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

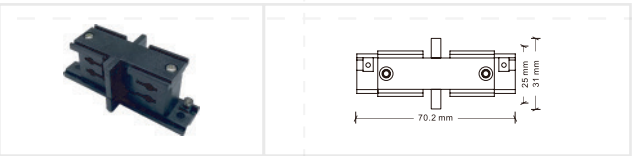


I-shape non-conducting connector

Model: ECO-0433(A)

Size: 70.2*25*31mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

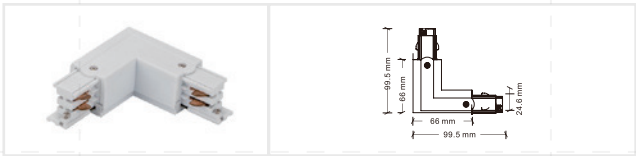


L-shape left power connector

Model: ECO-0435L

Size: 99.5*99.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

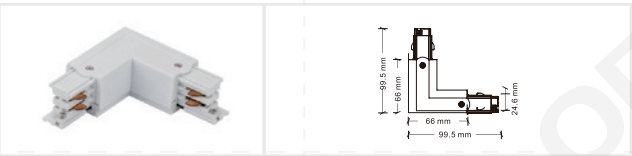


L-shape right power connector

Model: ECO-0435R

Size: 99.5*99.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

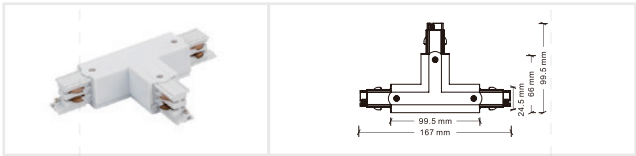


T-shape left power connector

Model: ECO-0436L1

Size: 167*99.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

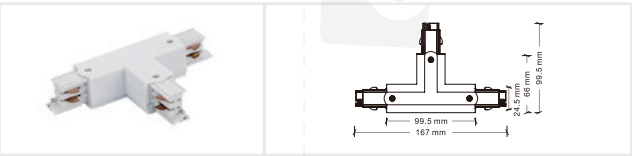

T-shape right power connector

Model: ECO-0436R1

Size: 167*99.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0




X-shape power connector

Model: ECO-0437

Size: 165.5*165.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

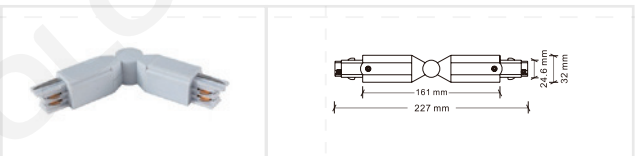

Turnable power connector

Model: ECO-M435

Size: 227*32*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0




End cap

Model: ECO-0432

Size: 25.5*33*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

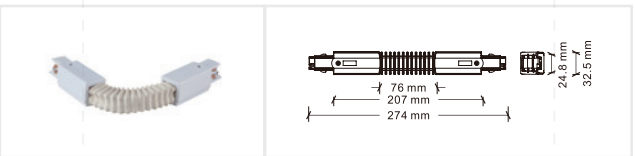

Soft power connector

Model: ECO-0439

Size: 274*32.5*32mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0



Pendant rod accessory

Model: ECO-EZ0448


Size: 2000mm

Colors: White/Black

Applicable track: Four-wire track ECO-04X0

Eco Track (6-wire)

Ceiling / Pendant track

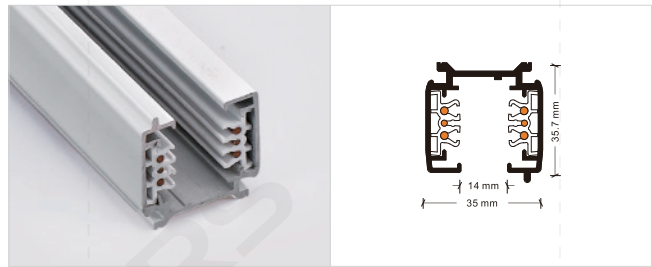

ECO-06X0

Installation: ceiling/pendant

Material: AL6063-T5

Coating: Black/White

Size: L1000/2000/3000*W35


*H35.7mm

Rated current: 16A

Maximum load: 3500W

Input voltage: AC220V

Accessory

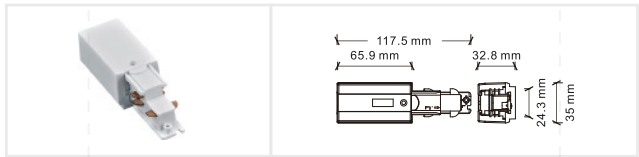


Left power connector

Model: ECO-0631L

Size: 117.5*32.8*35mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

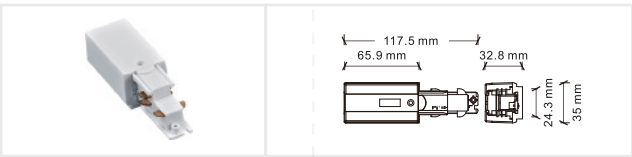


Right power connector

Model: ECO-0631R

Size: 117.5*32.8*35mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

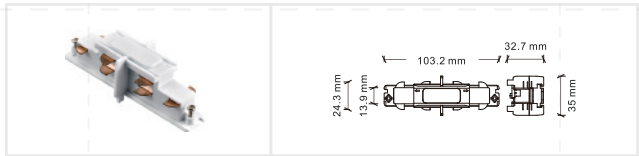


"I"shape Mini power connector

Model: ECO-0633

Size: 103.2*35*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

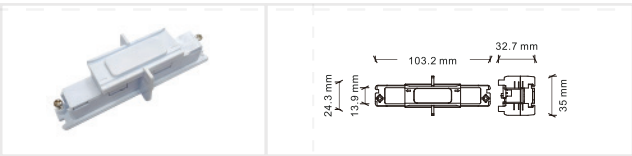


"I"shape Mini non-conducting connector

Model: ECO-0633(A)

Size: 103.2*35*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

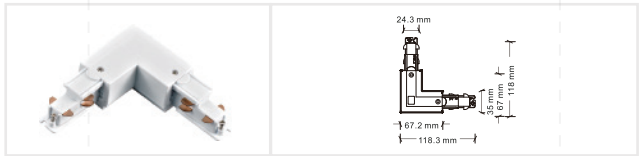


"L"shape left power connector

Model: ECO-0635L

Size: 118*118*32mm

Applicable track: Six-wire track ECO-06X0

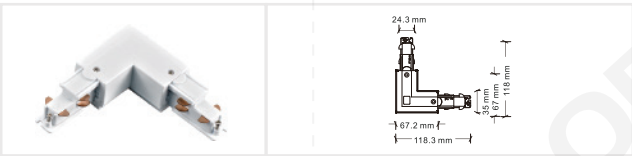


"L"shape right power connector

Model: ECO-0635R

Size: 118*118*32mm

Applicable track: Six-wire track ECO-06X0

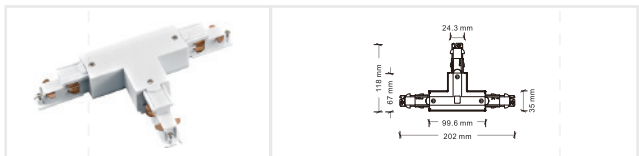


"T"shape left power connector

Model: ECO-0636L1

Size: 202*118*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

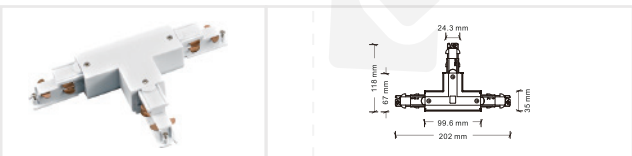


"T"shape right power connector

Model: ECO-0636R1

Size: 202*118*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

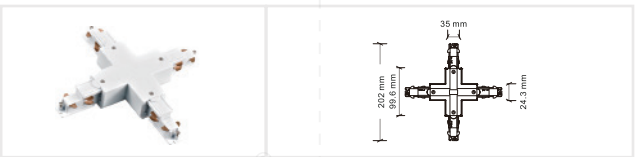


"X"shape power connector

Model: ECO-0637

Size: 202*202*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

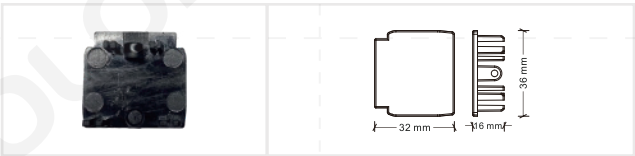


End cap

Model: ECO-0632

Size: 36*32*16mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0

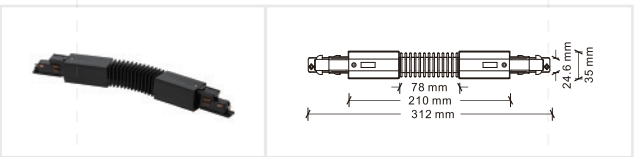

Soft power connector

Model: ECO-0639

Size: 274*32.5*32mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0



Pendant rod accessory

Model: ECO-EZ0648

Size: 2000mm

Colors: White/Black

Applicable track: Six-wire track ECO-06X0





LED LINEAR &
COMMERCIAL
LIGHTING



Tel: +86-755-2923-1888

E-mail: colors@colorsled.com

Web: www.colorsled.com

Add: 17F, Block B, Building 2, North of Skyworth

Inno Valley, Shiyan town, Bao'an District, Shenzhen