


GIANT

The GIANT series downlight is available in a range of sizes (from $\phi 120\text{mm}$ to $\phi 170\text{mm}$), with a maximum wattage of 60W and a maximum installation distance of 10m. It is suitable for airports, subway stations, as well as other large-scale transportation hubs and high-ceiling public spaces.





High Power with Adjustable Swing Angle

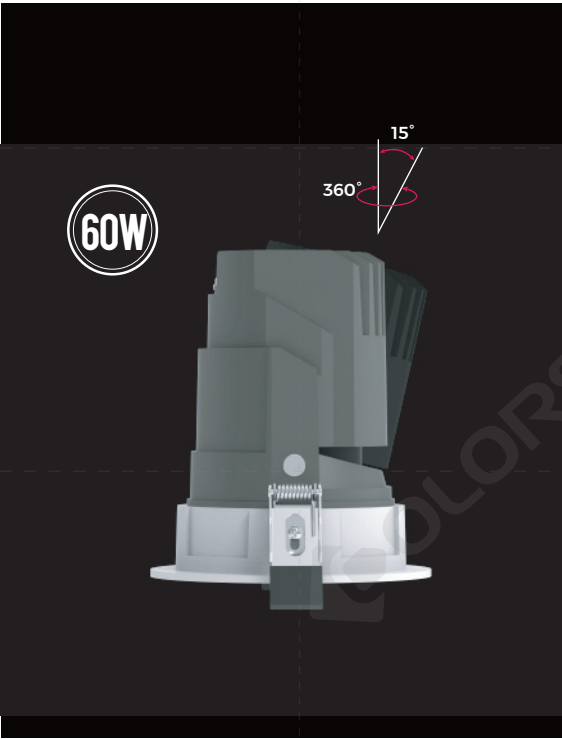

Multiple Beam Angles
Reflectors Available



Ultra-Narrow Angle 12°
Maximum Mounting Height 10m

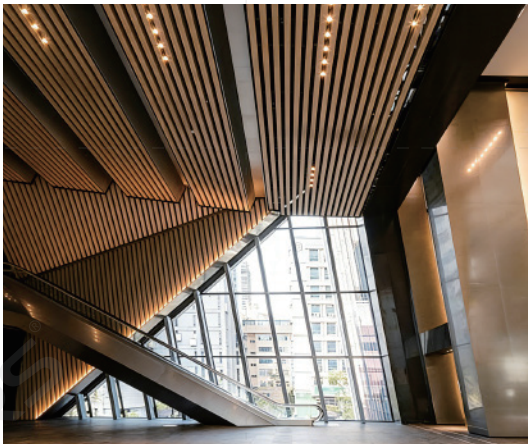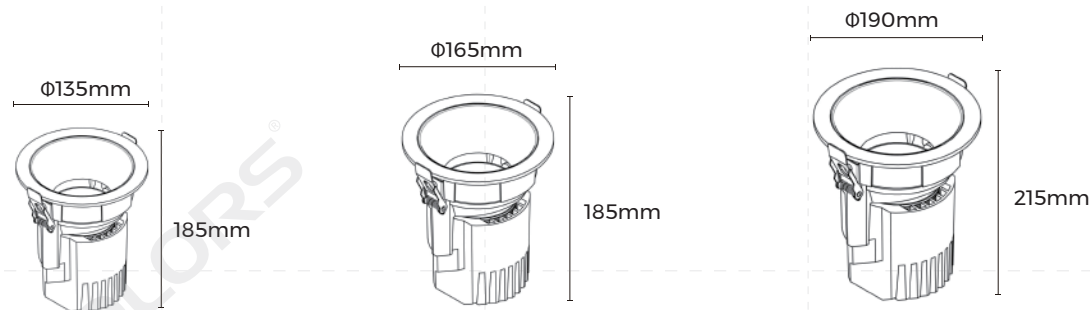

SKU	Opening	Power	Input Voltage	Output Voltage	Input Current(LED)	CRI	CCT	Beam Angle	luminous Efficacy (lm/w)	Luminous Flux (lm)	SDCM	UGR
BTE120L2	$\phi 120\text{mm}$	35W	220-240V	36V	850mA	>90	3000K	28°	70	2450	≤ 3	≤ 0
			220-240V	36V	850mA	>90	3000K	40°	70	2450	≤ 3	≤ 8
			220-240V	36V	850mA	>90	3000K	50°	60	2100	≤ 3	≤ 14
BTE145L2	$\phi 145\text{mm}$	30W	220-240V	36V	750mA	>90	3000K	12°	60	1800	≤ 3	≤ 0
		50W	220-240V	36V	1250mA	>90	3000K	24°	65	3250	≤ 3	≤ 0
			220-240V	36V	1250mA	>90	3000K	38°	65	3250	≤ 3	≤ 13
			220-240V	36V	1250mA	>90	3000K	50°	60	3000	≤ 3	≤ 0
BTE170L2	$\phi 170\text{mm}$	30W	220-240V	36V	750mA	>90	3000K	12°	60	1800	≤ 3	≤ 4
		60W	220-240V	36V	1500mA	>90	3000K	24°	63	3780	≤ 3	≤ 3
			220-240V	36V	1500mA	>90	3000K	38°	63	3780	≤ 3	≤ 0
			220-240V	36V	1500mA	>90	3000K	50°	60	3600	≤ 3	≤ 10