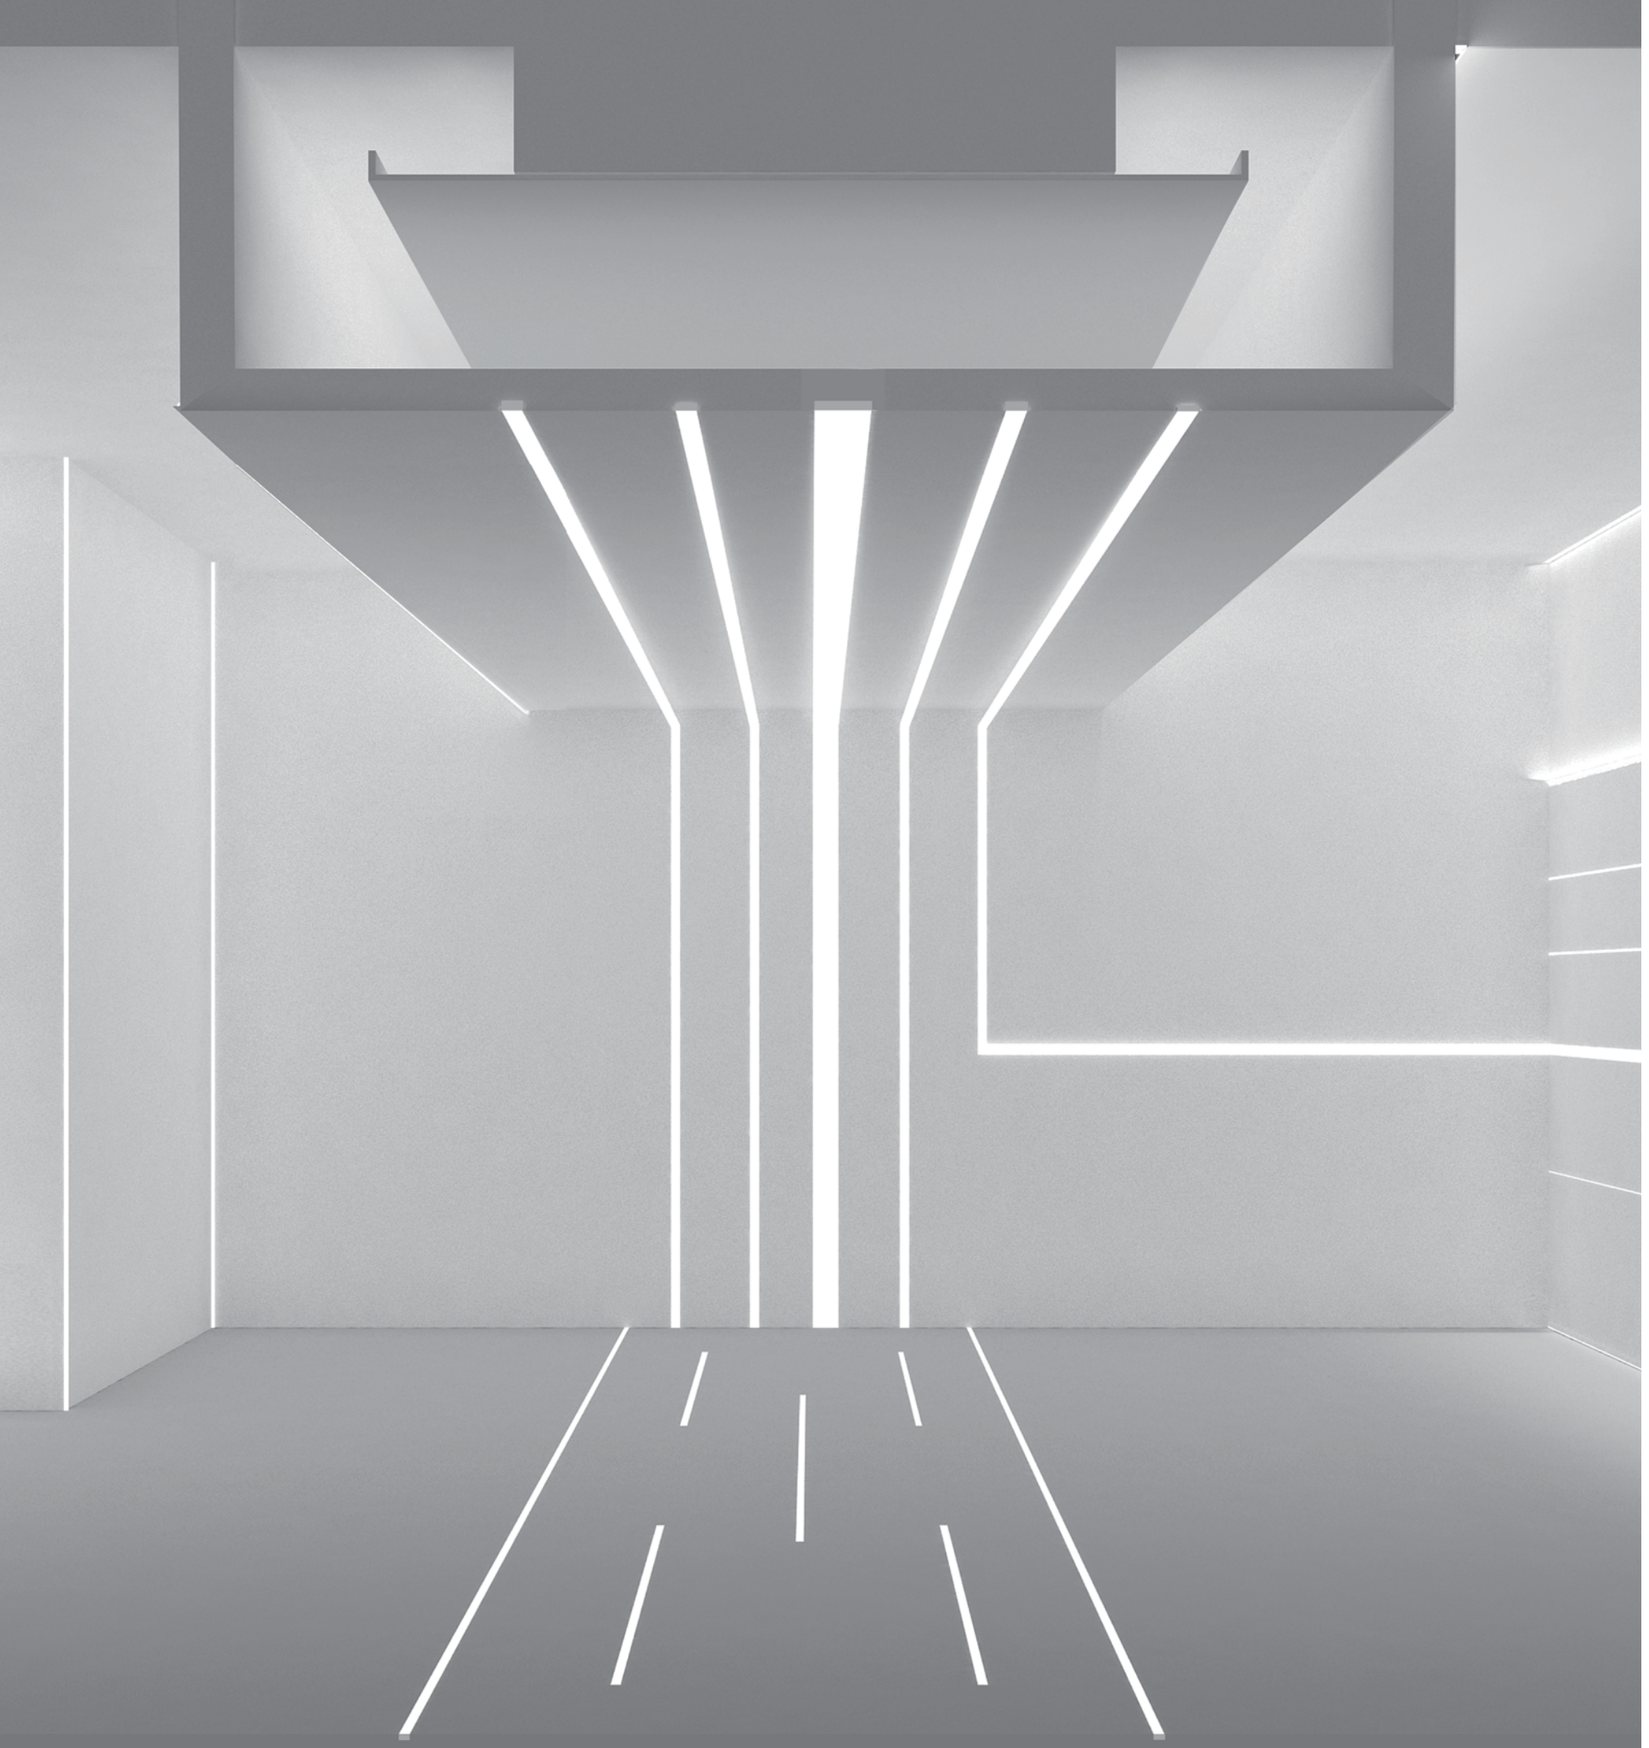


ALS

ALS Series, min. to 5mm in width, is designed for linear lights to perfectly fit into architectural settings such as plastered line, skirting board, corner, wall edge and floor etc. to achieve integrated lighting, full light look but in small profile.

Product Overview

Ceiling

LS0709



7.6x9MM

LS0812



7.8x12MM

LS1010



10x10MM

LS1510



15x10MM

LS1607



16x7MM

LS1613



16x13MM

LS1612L



16x18MM

LS1911C



19.7x19.6MM

LS1911K



19.7x19.7MM

LS2013



20x13MM

LS2020



20x20MM

LS2522



25x22.5MM

Pendant

LS3535



35x35MM

LS5050



50x50MM

LH25100




25x100MM

LT30



30x30MM


LT60



60x60MM

Recessed

LE1212




12x12MM

LE1410




14x10MM

LE1910



19x10MM

LE2409



24x9MM

LE2507



25x7MM

LE2513



25x13MM

LE3523



35x23MM

Trimless-Recessed

LR0812



47.8x12MM

LR1613



56x13MM

LR2013



60x13MM

LR2522



65x22MM

LR3735



99x35MM

LR3924



85x24MM

LR5535(A)



95x35MM

LR5535(B)



93x35MM

LR3840(A)



64.5x60MM

LR3840(B)



73.3x40MM

Corner

LG2323



40.3x24.3MM

LG2727



44.9x22.2MM

LG1616C(N)



16x16MM

LG1616K(N)



16x16MM

LG2020C



20x20MM

LG3030C



30x30MM

LG3030K

30x30MM

LR1616

38.4x36.5MM

Vario

LG7043

70x43MM

SK6013(A)

60x13.2MM

SK6013(B)

60x13.2MM

SK8513(B)

85x13.2MM

LS2126


21.4x27MM


LE2711

27.1x11MM



LS0709

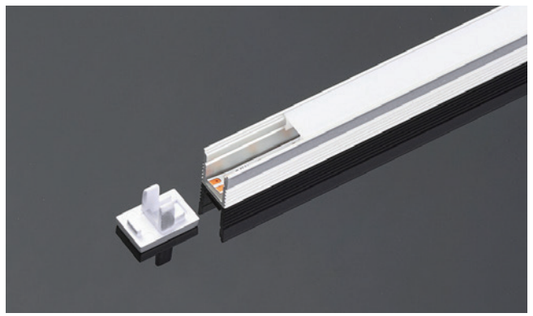



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W7.6×H9mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LS0709 L8×W7.6×H9mm	


Installation Accessories


Ceiling clip	CP-03 L15×W9.2×H4.5mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4×1.2mm	140LEDs	7LEDs/ 50mm




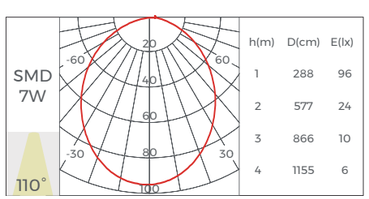

h(m)	D(cm)	E(lx)
1	288	96
2	577	24
3	866	10
4	1155	6

LS0812

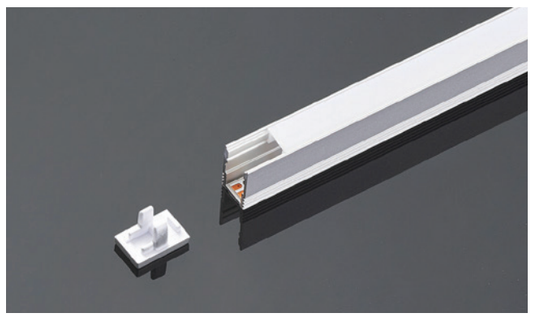



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W7.8×H12mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LS0812 L8×W7.8×H12mm	
End cap with hole	EC-LS0812 L8×W7.8×H12mm	


Installation Accessories


Ceiling clip	CP-03 L15×W9.2×H4.5mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4×1.2mm	140LEDs	7LEDs/ 50mm




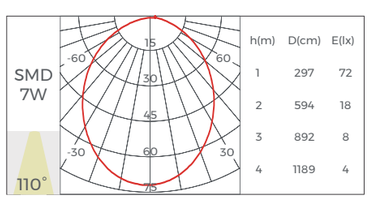

h(m)	D(cm)	E(lx)
1	297	72
2	594	18
3	892	8
4	1189	4

LS1010





Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W10×H10mm	
Diffuser	L2500*W9.43*H3.06mm	
Black Diffuser	CV-LS1010 L2500*W9.43*H3.06mm	
Holeless end caps	EC-LS1010 L10*W10*H8mm	
End cap with hole	EC-LS1010 L10*W10*H8mm	


Installation Accessories


Ceiling clip	CP-36 L12*W15*H4.5mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




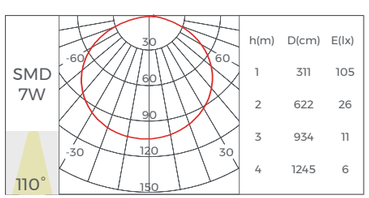

h(m)	D(cm)	E(lx)
1	311	105
2	622	26
3	934	11
4	1245	6

LS1510

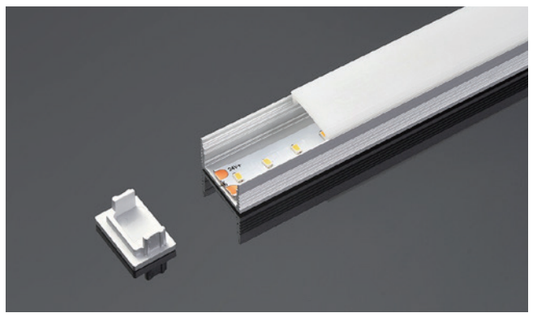



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W15×H10mm	
Diffuser	L2500×W14.4×H3mm	
Black Diffuser	CV-LS1510 L2500*W14.4*H3mm	
Holeless end caps	EC-LS1510 L15*W10*H8mm	
End cap with hole	EC-LS1510 L15*W10*H8mm	


Installation Accessories


Ceiling clip	CP-37 L17*W15*H4.5mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




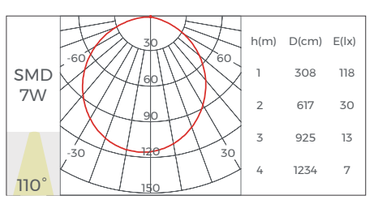

h(m)	D(cm)	E(lx)
1	308	118
2	617	30
3	925	13
4	1234	7

LS1607





Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500×W16×H7mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS1607 L6×W16×H7mm	
End cap with hole	EC-LS1607 L6×W16×H7mm	


Installation Accessories		
Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m	24V	15W/ m	5000×8×1.3mm	280LEDs	7LEDs/ 25mm




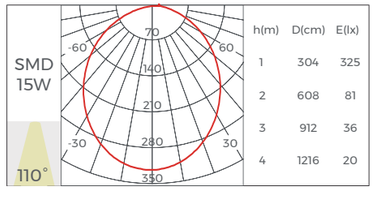

h(m)	D(cm)	E(lx)
1	304	325
2	608	81
3	912	36
4	1216	20

LS1613

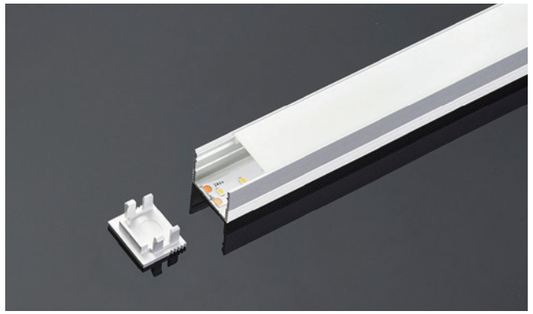



Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500×W16×H13mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS1613 L7×W16×H13mm	
End cap with hole	EC-LS1613 L7×W16×H13mm	


Installation Accessories		
Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm



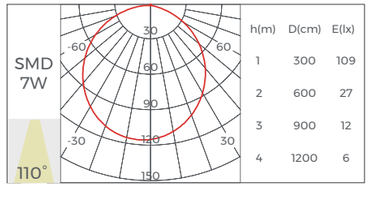


h(m)	D(cm)	E(lx)
1	300	109
2	600	27
3	900	12
4	1200	6

LS1612L

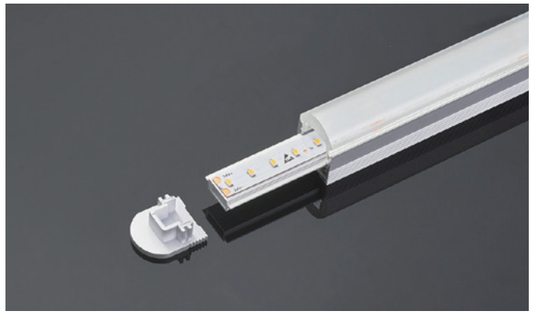

Basic Parameters	
Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach




Profile Components		
Profile	L2500×W16×H12mm	
Diffuser	L2500×W14.7×H4.5mm	
Holeless end caps	EC-LS1612L L16×W7×H18mm	
End cap with hole	EC-LS1612L L16×W7×H18mm	


Installation Accessories		
Ceiling clip	CP-04 17.8×15×4.5mm	
0-180° adjustable Ceiling clip	CP-06 35×17.7×21.4mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm



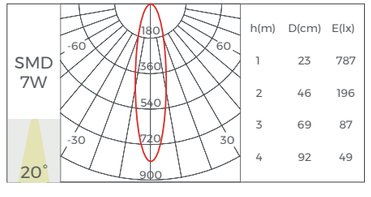

h(m)	D(cm)	E(lx)
1	23	787
2	46	196
3	69	87
4	92	49

Structure image

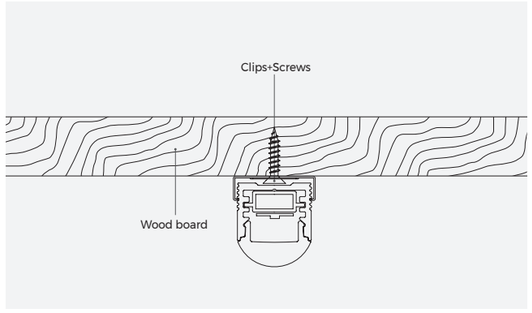

Effect image




LS1911C



Basic Parameters

Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components

Profile	L2500×W19.7×H11.1mm	
Diffuser	L2500×W19.7×H10.6mm	
Holeless end caps	EC-LS1911C L19.7×W19.7×H5mm	
End cap with hole	EC-LS1911C L19.7×W19.7×H5mm	

Installation Accessories

Ceiling clip	CP-07 38×15×4.5mm	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	

Standard extenders


180°/ "L"-type / "7"-type "T"-type /"X"-type	EX-E1 /EX-E2 /EX-E3 /EX-E4 /EX-E5




Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm



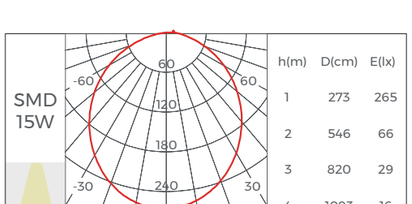


h(m)	D(cm)	E(lx)
1	273	265
2	546	66
3	820	29
4	1093	16

Structure image

Effect image




LS1911K

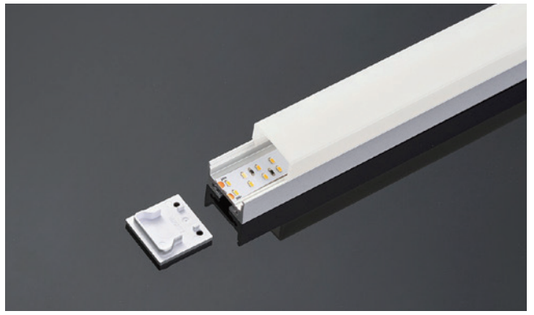

Basic Parameters

Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components

Profile	L2500×W19.7×H11.1mm	
Diffuser	L2500×W19.7×H10.6mm	
Holeless end caps	EC-LS1911K L19.7×W19.7×H5mm	
End cap with hole	EC-LS1911K L19.7×W19.7×H5mm	

Installation Accessories

Ceiling clip	CP-07 38×15×4.5mm	
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
Pendant cable (Wire and cable in one)	PE-K	

Standard extenders


180°/ "L"-type / "7"-type "T"-type /"X"-type	EX-E1 /EX-E2 /EX-E3 /EX-E4 /EX-E5




Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm




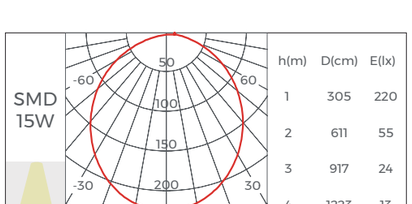

h(m)	D(cm)	E(lx)
1	305	220
2	611	55
3	917	24
4	1223	13


Structure image

Effect image

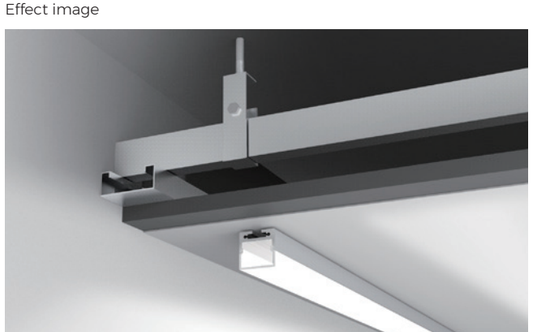

LS2013





Basic Parameters	
Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500*W20*H13mm	
Diffuser	L2500*W14.7*H4.3mm	
White Prismatic	CV-LR2013 L2500*W14.7*H4.3mm	
Black Prismatic	CV-LR2013 L2500*W14.7*H4.3mm	
Holeless end caps	EC-LS2013 L20*W13*H4.5mm	
End cap with hole	EC-LS2013 L20*W13*H4.5mm	


Installation Accessories		
Ceiling clip	CP-08 21.8X12X6.4mm	

Light Source

Flexible Strip 

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x 1.2mm	280LEDs	14LEDs/ 50mm




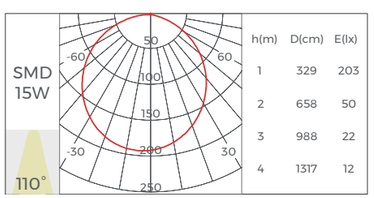

h(m)	D(cm)	E(lx)
1	329	203
2	658	50
3	988	22
4	1317	12

LS2020





Basic Parameters	
Installation	Ceiling, Trimless recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500×W20×H20mm	
Diffuser	L2500×W14.7×H4.3mm	
Prismutic Diffuser	CV-LR2013 L2500×W14.7×H4.3mm	
Black Diffuser	CV-LR2013 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LS2020 L20×W20×H4.5mm	
End cap with hole	EC-LS2020 L20×W20×H4.5mm	


Installation Accessories		
Ceiling clip	CP-08 21.8X12X6.4mm	

Light Source

Flexible Strip 


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x 1.2mm	280LEDs	14LEDs/ 50mm



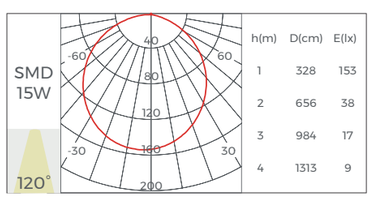


h(m)	D(cm)	E(lx)
1	328	153
2	656	38
3	984	17
4	1313	9

LS2522

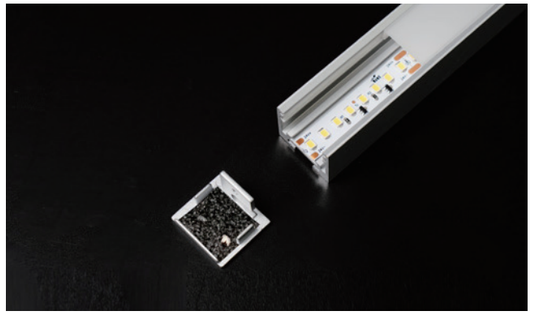

Basic Parameters	
Installation	Pendant, Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500*W25*H22.5mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LS25 L25.1*W22.5*H16.5mm	



Installation Accessories		
Whole luminaire splicing bars	EX-29 105*23*8.1mm	
Splicing bars	EX-31 100*15.5*2mm	
Pendant Accessory	PE-I	
Pendant Accessory	PE-J	
Ceiling Accessory	CL-16 64.5*24.5*5mm	
Power box 100w Non dimming	PB-02 574*25*50mm	
Power box 100w 1-10v dimming	PB-04 574*35*60mm	

Cover Accessories		
Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L107.7*W19.5*H15mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	

Corner Accessories		
L-shaped	L90-LS25 277X277X22mm	
T-shaped	T90-LS25 529X277X22mm	
X-shaped	X90-LS25 529X529X22mm	

* All corners are available in with/without light source.


Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x 1.6mm	160LEDs	8LEDs/ 50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x 1.2mm	30LEDs/ PCS	6LEDs/ 107.7mm

h(m)	D(cm)	E(lx)
1	251	967
2	502	241
3	754	107
4	1005	60

LS3535

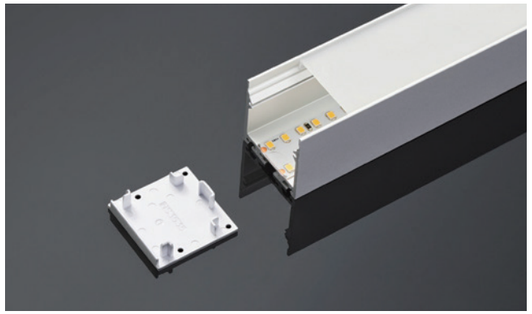



Basic Parameters

Installation	Ceiling, Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500*W35*H35mm	
Diffuser	L2500*W32.8*H5.1mm	
Holeless end caps	EC-LS3535 L35*W35*H9mm	

Installation Accessories


Ceiling clip	CP-15 L24.6*W20*H6.2mm	
Pendant Cable (with junction box)	PY-D	
Pendant Cable	PN-D	
Splicing Bar	EX-09 L1000*W13.32*H2.65mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M	24V	20W/M	2500x20x1.5mm	280LEDs	14LEDs/ 50mm




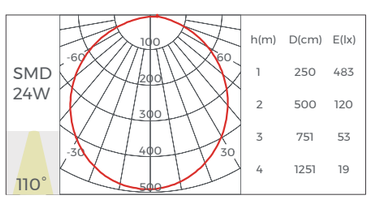

h(m)	D(cm)	E(lx)
1	250	483
2	500	120
3	751	53
4	1251	19

LS5050





Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500*W50*H50mm	
Diffuser	L2500*W44.7*H6.1mm	
Holeless end caps	EC-LS5050(N) L50*W50*H12mm	


Installation Accessories


Pendant Cable (with junction box)	PY-D	
Pendant Cable	PN-D	
Pendant Rod	PG-I	
Splicing Bar	EX-11 L400*W45.6*H21.4mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500*34*1.5mm	280LEDs	14LEDs/ 50mm



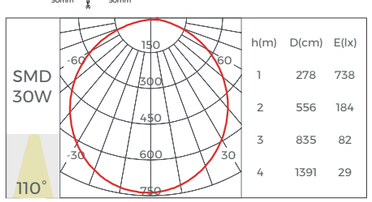

h(m)	D(cm)	E(lx)
1	278	738
2	556	184
3	835	82
4	1391	29

LH25100




Basic Parameters

Installation	Pendant
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500*W25*H100mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LH25 L100*W20*H10.5mm	




Installation Accessories


Splicing bars	EX-30 80*22*15mm	
Pendant Accessory	PE-H	
	PE-G	
Power box 100w Non dimming	PB-02 574*25*50mm	
Power box 100w 1-10v dimming	PB-04 574*35*60mm	

Light Source

Flexible Strip



Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/ 50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/ PCS	6LEDs/ 107.7mm



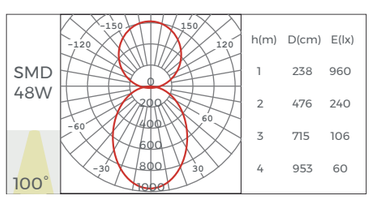

h(m)	D(cm)	E(lx)
1	238	960
2	476	240
3	715	106
4	953	60

Cover Accessories


Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L107.7*W19.5*H15.0mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	


Corner Accessories

L-shaped	L90-LH25 277X277X100mm	
T-shaped	T90-LH25 529X277X100mm	
X-shaped	X90-LH25 529X529X100mm	

* All corners are available in with/without light source.

LT30

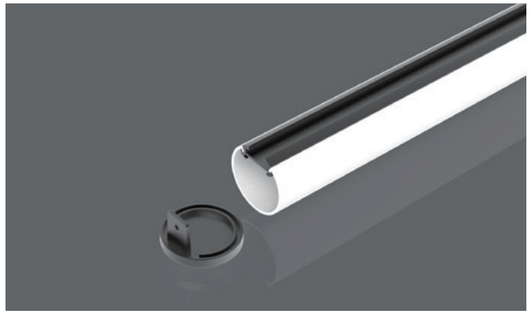



Basic Parameters	
Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components		
Profile	L2500×W19.5×H7.4mm	
Diffuser	L2500×Φ30×H26.8mm	
Holeless end caps	EC-LT30 Φ32.5XH2.4mm	

Installation Accessories		
Pendant cable (Wire and cable in one)	PE-A	
Pendant Cable	PN-Y	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/ M	24V	16.2W/ M	5000x10x 1.6mm	168LEDs	7LEDs/ 42mm



LT60

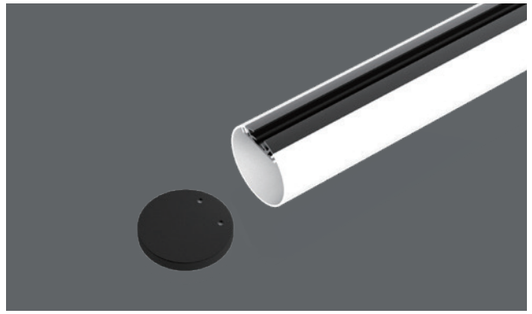





Basic Parameters	
Installation	Pendant
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500×W35.2×H11mm	
Diffuser	L2500×Φ60×H55.6mm	
Holeless end caps	EC-LT60 Φ63.4xH8mm	

Installation Accessories		
Pendant cable (with junction box)	PY-D	
Pendant cable	PN-D	
180° extender	EX-09 L1000×W13.3×H2.6mm	


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/ M 2000LM/ M	24V	20W/ M	2500x20x 1.5mm	280LEDs	14LEDs/ 50mm




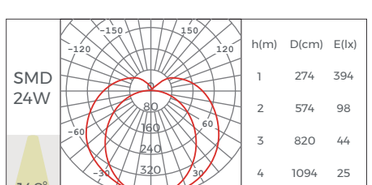

h(m)	D(cm)	E(lx)
1	274	394
2	574	98
3	820	44
4	1094	25

LE1212

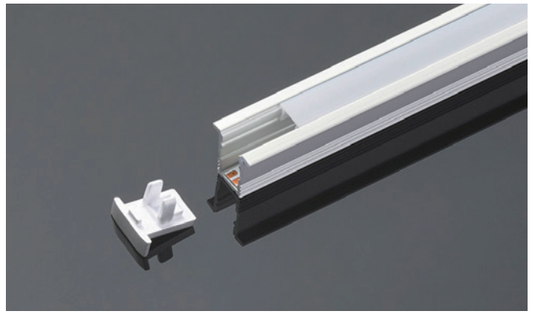





Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500×W12×H12mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LE1212 L12×W12×H10mm	
End cap with hole	EC-LE1212 L12×W12×H10mm	

Installation Accessories		
Embedded clip	CP-11 25×13×9.5mm	


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4 ×1.2mm	140LEDs	7LEDs/ 50mm




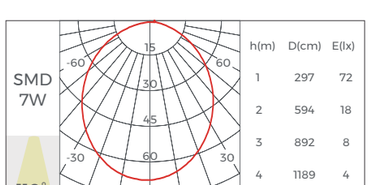

h(m)	D(cm)	E(lx)
1	297	72
2	594	18
3	892	8
4	1189	4

LE1410

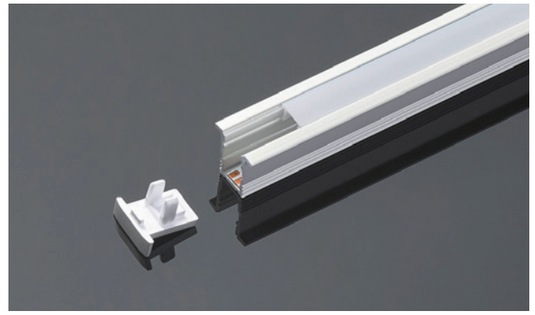





Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components		
Profile	L2500×W14×H10mm	
Diffuser	L2500×W9.43×H3.06mm	
Black Prismatic	CV-LS1010 L2500×W9.43×H3.06mm	
Holeless end caps	EC-LE1410 L14×W10×H8mm	
End cap with hole	EC-LE1410 L14×W10×H8mm	

Installation Accessories		
Embedded Clips	CP-38 L15.3×W24×H8mm	


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8× 1.2mm	140LEDs	7LEDs/ 50mm




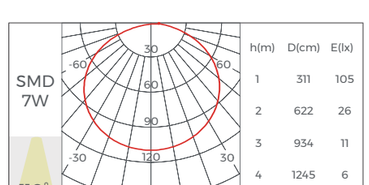

h(m)	D(cm)	E(lx)
1	311	105
2	622	26
3	934	11
4	1245	6

LE1910

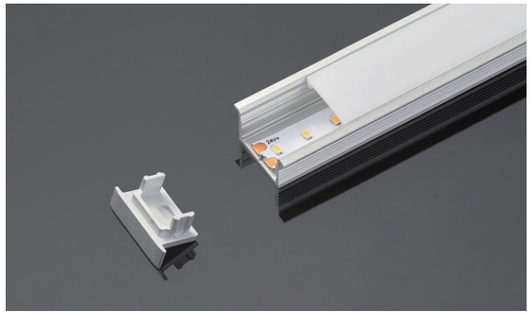



Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500xW19xH10mm	
Diffuser	L2500xW14.43xH3mm	
Black Diffuser	CV-LS1510 L2500xW14.43xH3mm	
Holeless end caps	EC-LE1910 L19xW10xH8mm	
End cap with hole	EC-LE1910 L19xW10xH8mm	


Installation Accessories

Embedded clip	CP-39 L24×W20.79×H8.5mm	

Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm

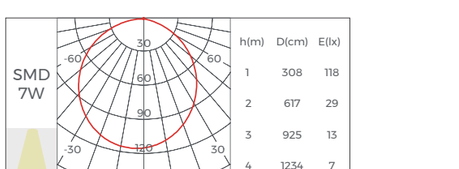

LE2409





Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components


Profile	L2500×W23.8×H8.8mm	
Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
End cap	EC-LE2409 L23.8×W8.8×H14mm	
End cap with hole	EC-LE2409 L23.8×W8.8×H14mm	

Light Source


Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4×1.2mm	140LEDs	7LEDs/ 50mm



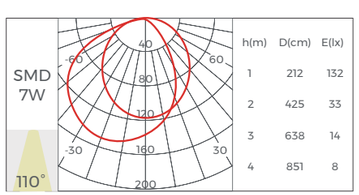

LE2507

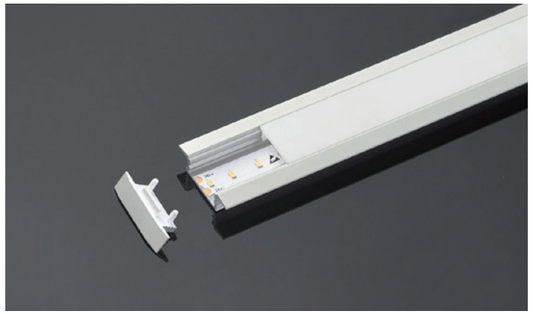



Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White


Profile Components


Profile	L2500×W25×H7mm	
Diffuser	L2500×W14.6×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LE2507 L25×W7×H10mm	
End cap with hole	EC-LE2507 L25×W7×H10mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/m	24V	15W/ m	5000×8×1.3mm	280LEDs	7LEDs/ 25mm



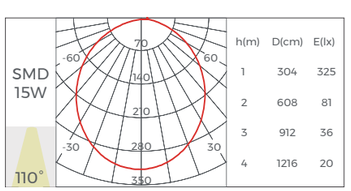

LE2513





Basic Parameters

Installation	Recessed
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White

Profile Components

Profile	L2500×W25×H13mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LE2513 L25×W13×H11mm	
End cap with hole	EC-LE2513 L25×W13×H11mm	


Installation Accessories


Embedded clip	CP-12 21.79×20×11mm	

Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm



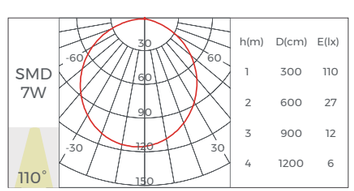


LE3523



Basic Parameters	
Installation	Recessed
Material	AL6063-T5, spraying surface
Coating	Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components


Profile	L2500*W35*H23mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LE25 L35*W23*H21.5mm	



Installation Accessories

Splicing bars	EX-31 100*15.5*2mm	
Recessed Accessory	RE-14 24*16.3*15mm	

Cover Accessories

Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L107.7*W19.5*H15mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	

Corner Accessories


L-shaped	L90-LE25 277X277X23mm	
T-shaped	T90-LE25 529X277X23mm	
X-shaped	X90-LE25 529X529X23mm	


* All corners are available in with/without light source.

Light Source

Flexible Strip 


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/ 50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/ PCS	6LEDs/ 107.7mm



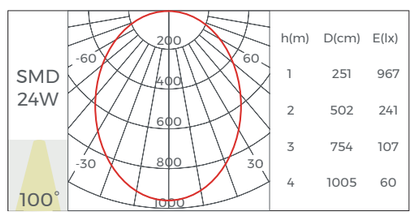

h(m)	D(cm)	E(lx)
1	251	967
2	502	241
3	754	107
4	1005	60


LR0812

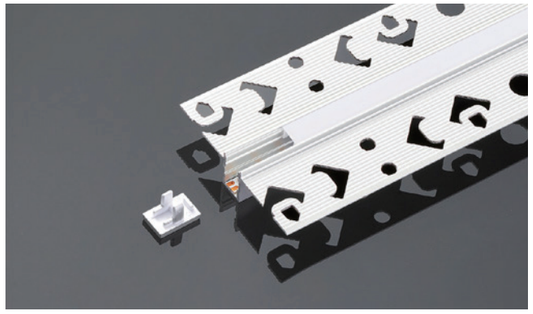

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500*W47.8*H12mm	
Diffuser	L2500*W6.4*H3.7mm	
Black Diffuser	CV-LR0812 L2500*W6.4*H3.7mm	
Holeless end caps	EC-LR0812 L8*W7.8*H12mm	
End cap with hole	EC-LR0812 L8*W7.8*H12mm	




Installation Accessories


Screw	CL-01 M3.5*40mm	

Light Source

Flexible Strip 


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/m	24V	6.6W/m	5000*4*1.2mm	140LEDs	7LEDs/ 50mm



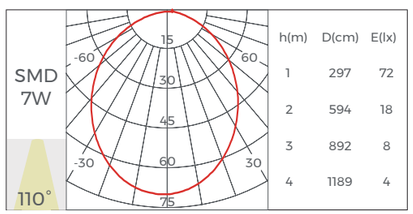

h(m)	D(cm)	E(lx)
1	297	72
2	594	18
3	892	8
4	1189	4


Structure image

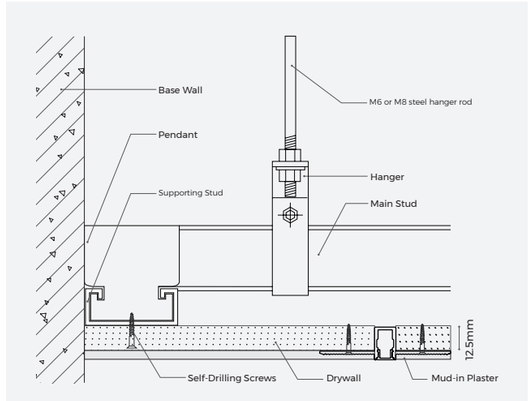

Effect image



LR1613

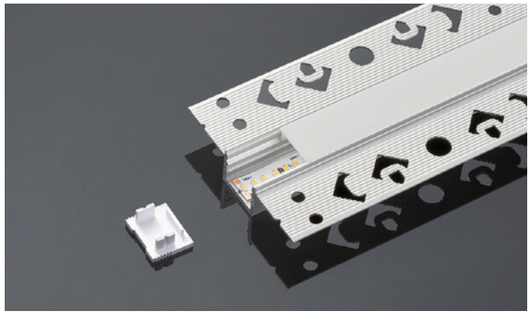


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W56×H13mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LR1613 L7×W16×H13mm	
End cap with hole	EC-LR1613 L7×W16×H13mm	




Installation Accessories

Screw	CL-01 M3.5×40mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6140-24V-8mm	>90	710LM/m	24V	6.6W/m	5000×8×1.2mm	140LEDs	7LEDs/50mm




Structure image

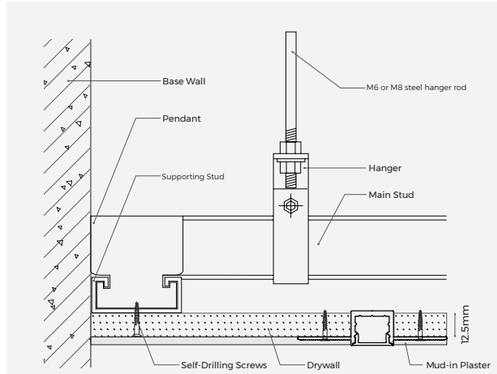


Effect image



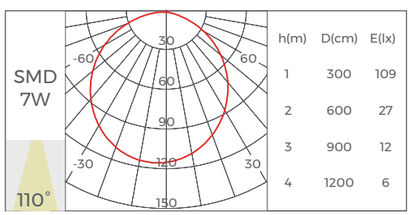

h(m)	D(cm)	E(lx)
1	300	109
2	600	27
3	900	12
4	1200	6

LR2013

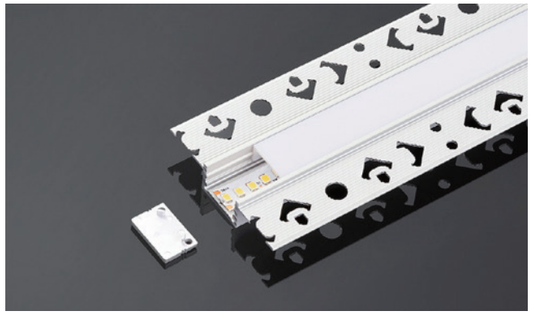


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W60×H13mm	
Diffuser	L2500×W14.7×H4.3mm	
White Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR2013 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LR2013 L20×W13×H4.5mm	
End cap with hole	EC-LR2013 L20×W13×H4.5mm	




Installation Accessories

Screw	CL-01 M3.5×40mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D6280-24V-10mm	>90	1508LM/M	24V	15W/M	5000x10x1.2mm	280LEDs	14LEDs/50mm




Structure image

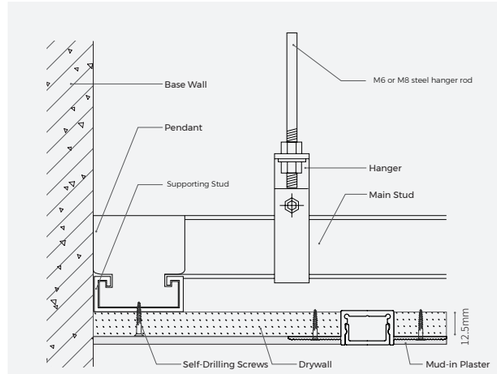


Effect image



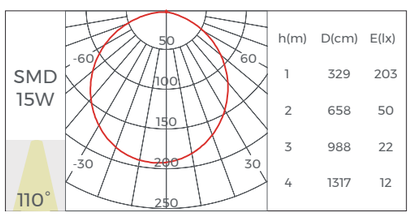

h(m)	D(cm)	E(lx)
1	329	203
2	658	50
3	988	22
4	1317	12

LR2522

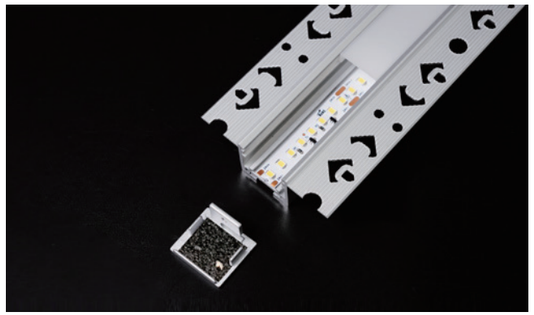


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components


Profile	L2500*W65*H22.5mm	
Diffuser	L2500*W20.4*H6.7mm	
Holeless end caps	EC-LS25 L25.1*W22.5*H16.5mm	



Installation Accessories

Screw	CL-01 M3.5*40mm	
Splicing bars	EX-31 100*15.5*2mm	

Cover Accessories

Prismatic Diffuser	CV-LS25FP L2500*W20.4*H6.7mm	
Grating	CV-LS25G L107.7*W19.5*H15mm	
Asymmetric	CV-LS25LA L2500*W22*H7.5mm	
Blind	CV-LS25FB L2500*W20.4*H6.7mm	

Corner Accessories


L-shaped	L90-LR25 277X277X22.5mm	
T-shaped	T90-LR25 529X277X22.5mm	
X-shaped	X90-LR25 529X529X22.5mm	


* All corners are available in with/without light source.

Light Source

Flexible Strip 

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
DS8160(A)-24V-10mm	>80 >90	2900LM/M 2280LM/M	24V	20W/M	5000x10x1.6mm	160LEDs	8LEDs/ 50mm
DY830-24V-14mm	>80 >90	2400LM/M 2060LM/M	24V	20W/M	538.5x13.5x1.2mm	30LEDs/ PCS	6LEDs/ 107.7mm



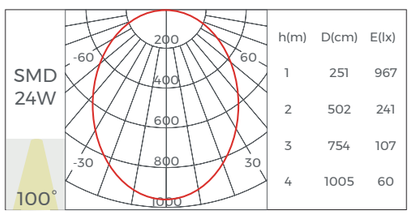

h(m)	D(cm)	E(lx)
1	251	967
2	502	241
3	754	107
4	1005	60

LR3735




Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W99×H35mm	
Holeless end caps	EC-LR3735 L59.8×W35×H2mm	



Installation Accessories


Screw	CL-01 M3.5*40mm	

Light Source

Flexible Strip 


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/M	24V	16.2W/M	5000x10x1.6mm	168LEDs	7LEDs/ 42mm



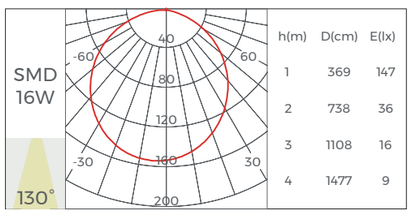

h(m)	D(cm)	E(lx)
1	369	147
2	738	36
3	1108	16
4	1477	9


Structure image

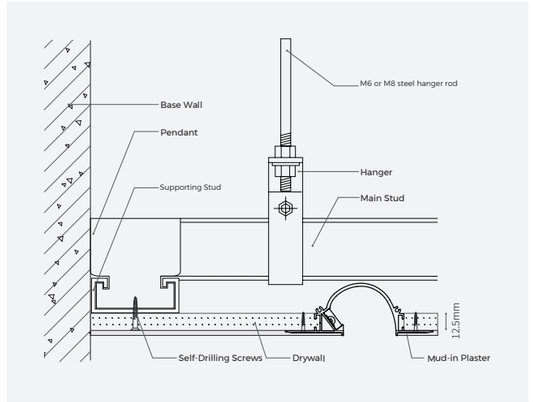


Effect image



LR3924

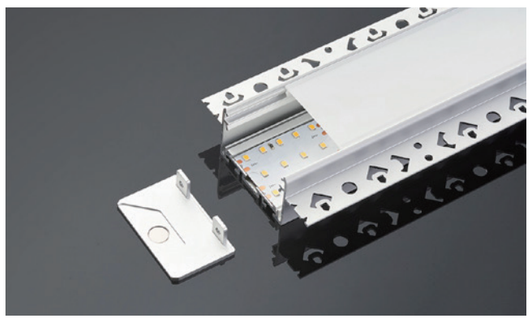

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach




Profile Components		
Profile	L2500×W85×H24mm	
Diffuser	L2500×W34.2×H10.2mm	
Holeless end caps	EC-LR3924 L38.6×W24×H2mm	

Installation Accessories		
Screw	CL-01 M3.5×40mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-20mm	>80 >95	2600LM/M 2000LM/M	24V	20W/M	2500x20x1.5mm	280LEDs	14LEDs/50mm




Structure image

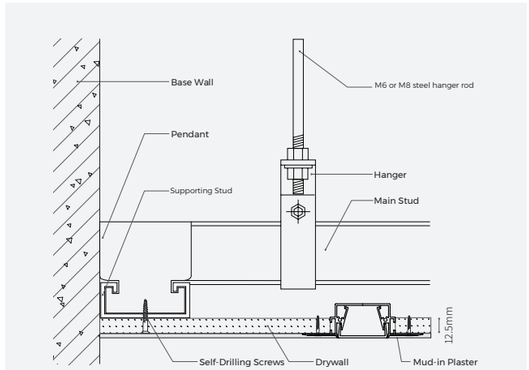


Effect image



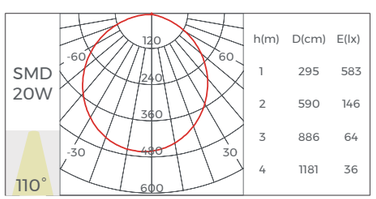


h(m)	D(cm)	E(lx)
1	295	583
2	590	146
3	886	64
4	1181	36

LR5535(A)

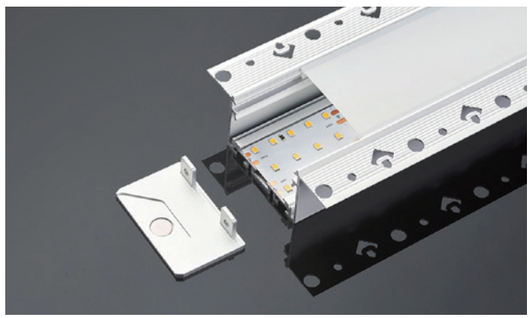


Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach




Profile Components		
Profile	L2500×W95×H35mm	
Diffuser	L2500×W48.8×H5.6mm	
Flexible diffuser	CV-LS5470FD(F) L50000×W48.8×H5.6mm	
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000×W48.8×H5.6mm	
Holeless end caps	EC-LR5535(A) L55×W35×H22mm	

Installation Accessories		
Screw	CL-01 M3.5×40mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500×34×1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	>80	2740LM/m	24V	50W/m	2500×34×1.5mm	560LEDs	28LEDs/50mm
Rigid module							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	499×36×5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	>80	2740LM/m	24V	50W/m	499×36×5.6mm	560LEDs	28LEDs/50mm

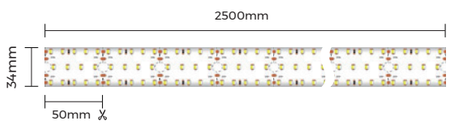

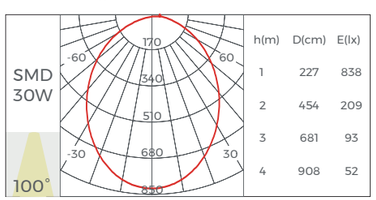


h(m)	D(cm)	E(lx)
1	227	838
2	454	209
3	681	93
4	908	52

Splicing Accessories					
180°extender	EX-E1		"Y"-type (120°)	EX-E9	
"T"-type (90°)	EX-E4		"T"-type(60°+120°)	EX-E12	
"L"-type (60°)	EX-E10		"L"-type (90°)	EX-E2	
"L"-type (120°)	EX-E8		"X"-type (90°)	EX-E5	
"X"-type(60°+120°)	EX-E11		"7"-type (60°)	EX-E7	
"7"-type (90°)	EX-E3		"7"-type (120°)	EX-E6	
Splicing bar	EX-17 50×9×22.5mm				

Corners		
"L"-type	L90-LR5535(A) 107×107×35mm	
"L"-type(inward)	L90N-LR5535(A) 100×100×95mm	
"L"-type (outward)	L90W-LR5535(A) 100×100×95mm	
"T"-type	T90-LR5535(A) 150×107×35mm	
"X"-type	X90-LR5535(A) 150×150×35mm	

LR5535(B)

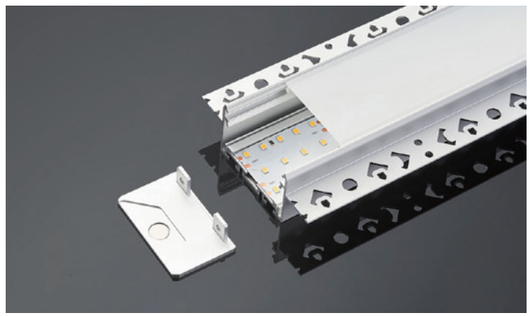


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W95×H35mm	
Diffuser	L2500×W48.8×H5.6mm	
Flexible diffuser	CV-LS5470FD(F) L50000×W48.8×H5.6mm	
Flexible Prismatic diffuser	CV-LS5470FP(F) L50000×W48.8×H5.6mm	
Holeless end caps	EC-LR5535(B) L55×W35×H22mm	



Installation Accessories

Screw	CL-01 M3.5×40mm	


Light Source


Flexible Strip 

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
D8280-24V-34mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	2500×34×1.5mm	280LEDs	14LEDs/50mm
D8560SWW-24V-34mm	>80	2740LM/m	24V	50W/m	2500×34×1.5mm	560LEDs	28LEDs/50mm

Rigid module 

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/meter	Cutting unit
DY8280B-24V-36mm	>80 >95	3150LM/m 2500LM/m	24V	25W/m	499×36×5.6mm	280LEDs	14 LEDs/50mm
DY8560SWW-24V-36mm	>80	2740LM/m	24V	50W/m	499×36×5.6mm	560LEDs	28LEDs/50mm

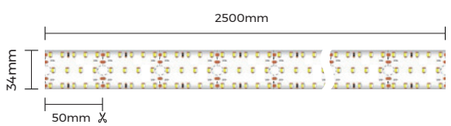

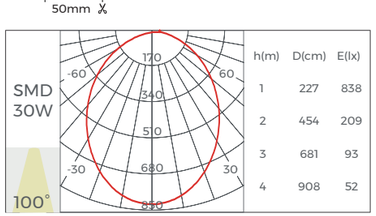

h(m)	D(cm)	E(lx)
1	227	838
2	454	209
3	681	93
4	908	52


Splicing Accessories

180°extender	EX-E1	"Y"-type (120°)	EX-E9
"T"-type (90°)	EX-E4	"T"-type(60°+120°)	EX-E12
"L"-type (60°)	EX-E10	"L"-type (90°)	EX-E2
"L"-type (120°)	EX-E8	"X"-type (90°)	EX-E5
"X"-type(60°+120°)	EX-E11	"7"-type (60°)	EX-E7
"7"-type (90°)	EX-E3	"7"-type (120°)	EX-E6
Splicing bar	EX-17 50×9×22.5mm		

Corners

"L"-type	L90-LR5535(B) 107×107×35mm	
"L"-type(inward)	L90N-LR5535(B) 100×100×93mm	
"L"-type (outward)	L90W-LR5535(B) 100×100×93mm	
"T"-type	T90-LR5535(B) 150×107×35mm	
"X"-type	X90-LR5535(B)) 150×150×35mm	

LG2323

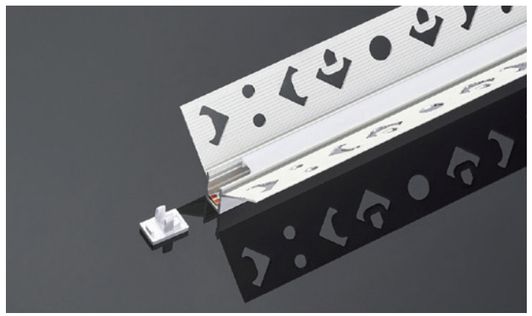


Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W40.3×H24.3mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LG2323 L8×W7.8×H12mm	
End cap with hole	EC-LG2323 L8×W7.8×H12mm	



Structure image


Installation Accessories


Screw	CL-01 M3.5×40mm	

Light Source


Flexible Strip 

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4×1.2mm	140LEDs	7LEDs/50mm



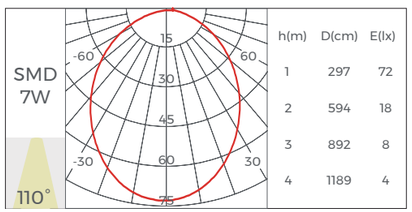


h(m)	D(cm)	E(lx)
1	297	72
2	594	18
3	892	8
4	1189	4

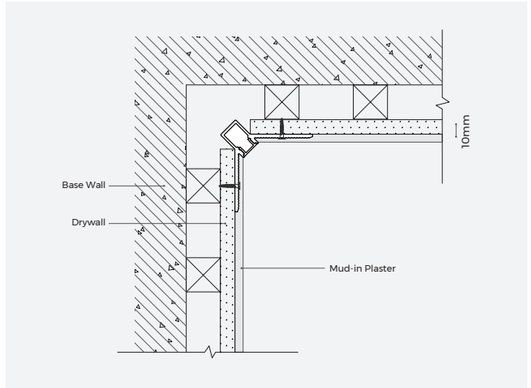

Effect image



LG2727

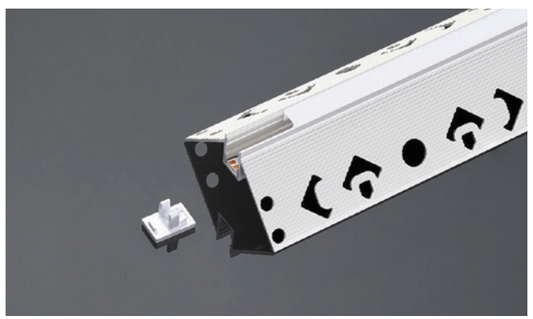

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W44.9×H22.2mm	
Diffuser	L2500×W6.4×H3.7mm	
Black Diffuser	CV-LR0812 L2500×W6.4×H3.7mm	
Holeless end caps	EC-LG2727 L8×W7.8×H12mm	
End cap with hole	EC-LG2727 L8×W7.8×H12mm	


Installation Accessories


Screw	CL-01 M3.5×40mm	

Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-4mm	>90	710LM/ m	24V	6.6W/ m	5000×4×1.2mm	140LEDs	7LEDs/ 50mm







Structure image

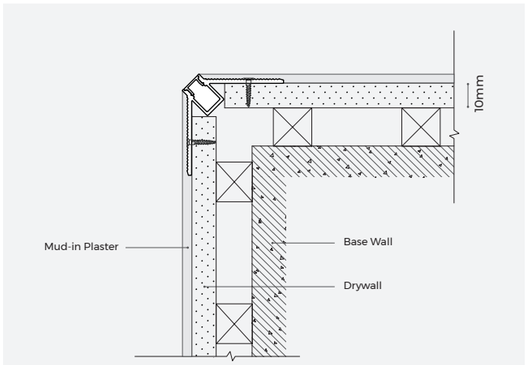

Effect image

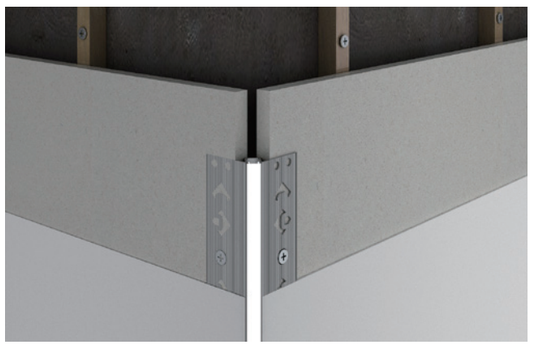

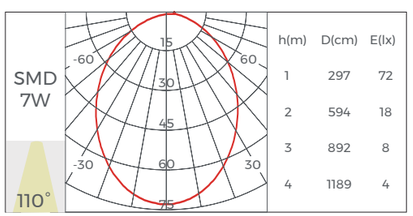

LG1616C(N)



Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W16×H16mm	
Diffuser	L2500×W19.4×H6mm	
Holeless end caps	EC-LG1616C(N) L16×W16×H6.5mm	
End cap with hole	EC-LG1616C(N) L16×W16×H6.5mm	


Installation Accessories


Ceiling clip	CP-13 15×17×17mm	

Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm






Structure image

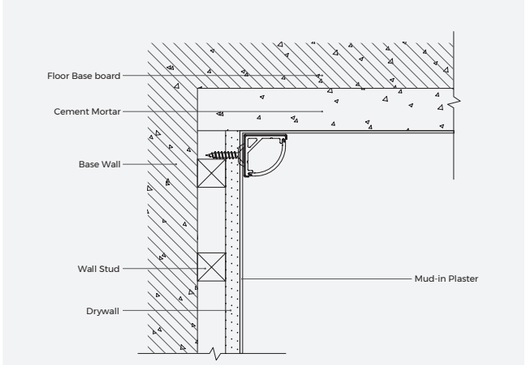

Effect image



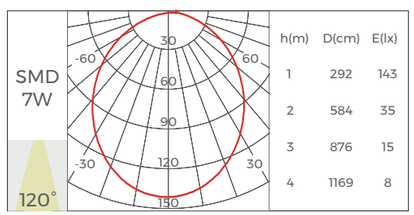

LG1616K(N)




Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W16×H16mm	
Diffuser	L2500×W14.6×H14.6mm	
Holeless end caps	EC-LG1616K(N) L16×W16×H6.5mm	
End cap with hole	EC-LG1616K(N) L16×W16×H6.5mm	




Installation Accessories

Ceiling clip	CP-13 15×17×17mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




Structure image

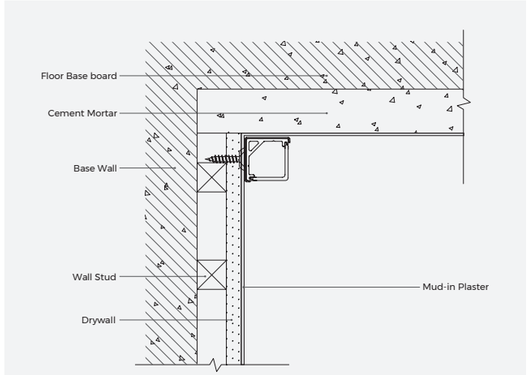


Effect image



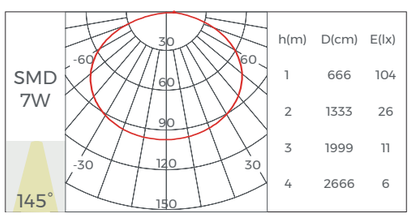

LG2020C

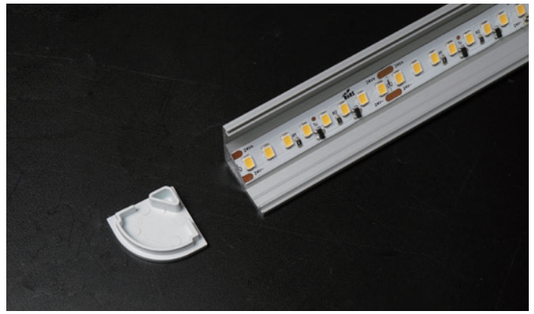


Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W20×H20mm	
Diffuser	L2500×W25.4×H7.7mm	
Holeless end caps	EC-LG2020C L20×W20×H6.5mm	
End cap with hole	EC-LG2020C L20×W20×H6.5mm	




Installation Accessories

Ceiling clip	CP-50 L21.1×W21.1×H15mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/ 50mm



Structure image

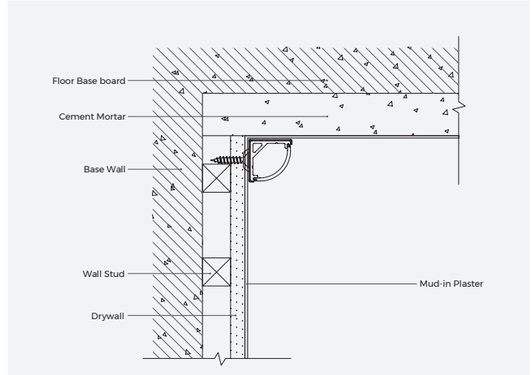

Effect image



LG3030C




Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W30×H30mm	
Diffuser	L2500×W28.9×H28.9mm	
Holeless end caps	EC-LG3030C L30×W30×H5mm	
End cap with hole	EC-LG3030C L30×W30×H5mm	




Installation Accessories


Ceiling clip	CP-14 31×31×14mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/50mm



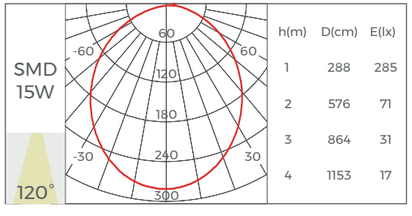

h(m)	D(cm)	E(lx)
1	288	285
2	576	71
3	864	31
4	1153	17


Structure image

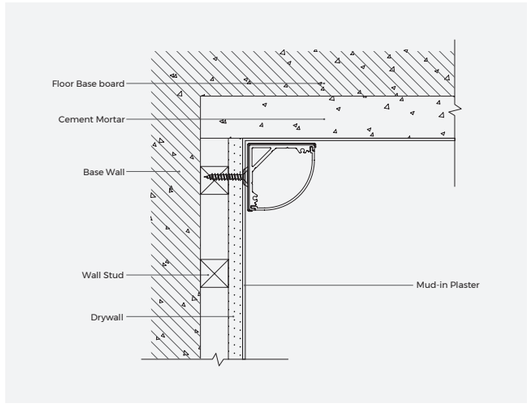

Effect image



LG3030K

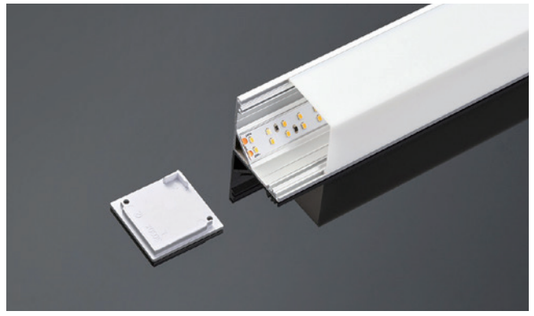


Basic Parameters

Installation	Ceiling
Material	AL6063-T5, spraying surface/ anodizing
Coating	Silver anodized, Black, White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components

Profile	L2500×W30×H30mm	
Diffuser	L2500×W29.2×H29.2mm	
Holeless end caps	EC-LG3030K L30×W30×H5mm	
End cap with hole	EC-LG3030K L30×W30×H5mm	




Installation Accessories


Ceiling clip	CP-14 31×31×14mm	

Light Source

Flexible Strip


Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-10mm	>90	1508LM/ m	24V	15W/ m	5000×10×1.2mm	280LEDs	14LEDs/50mm



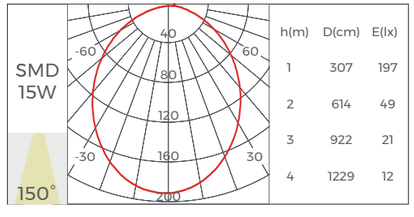

h(m)	D(cm)	E(lx)
1	307	197
2	614	49
3	922	21
4	1229	12


Structure image

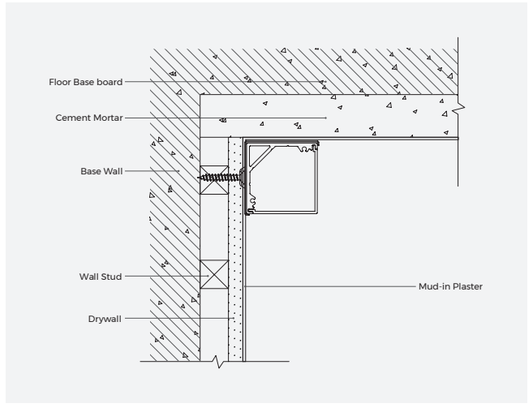

Effect image




LR1616

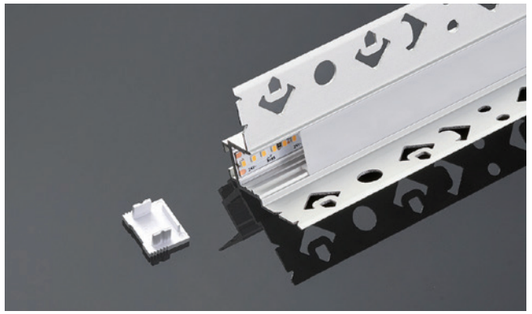

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components

Profile	L2500×W38.4×H36.5mm	
Diffuser	L2500×W14.7×H4.5mm	
White Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Black Prismatic	CV-LR1613 L2500×W14.7×H4.3mm	
Holeless end caps	EC-LR1616 L7×W16×H13mm	
End cap with hole	EC-LR1616 L7×W16×H13mm	


Installation Accessories

Screw	CL-01 M3.5×40mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm




Structure image

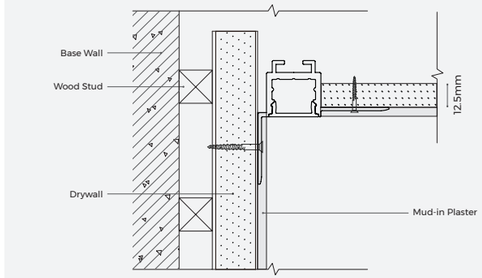


Effect image



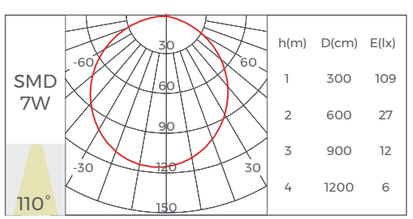


h(m)	D(cm)	E(lx)
1	300	109
2	600	27
3	900	12
4	1200	6

LR3840(A)

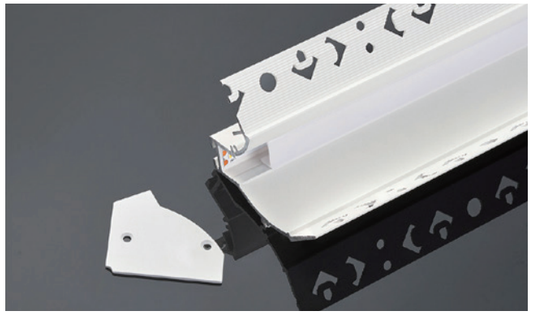

Basic Parameters

Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach



Profile Components

Profile	L2500×W64.5×H60mm	
Diffuser	L2500×W13.5×H8.5mm	
Holeless end caps	EC-LR3840(A) L43.3×W40×H1.5mm	


Installation Accessories

Screw	CL-01 M3.5×40mm	


Light Source

Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/ m	24V	15W/ m	5000×8×1.3mm	280LEDs	7LEDs/ 25mm




Structure image

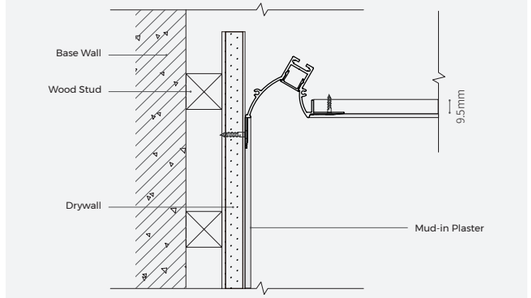


Effect image



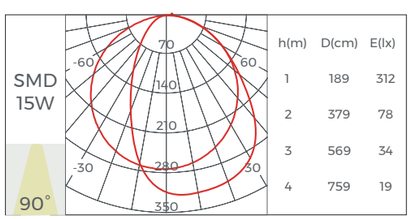

h(m)	D(cm)	E(lx)
1	189	312
2	379	78
3	569	34
4	759	19


LR3840(B)

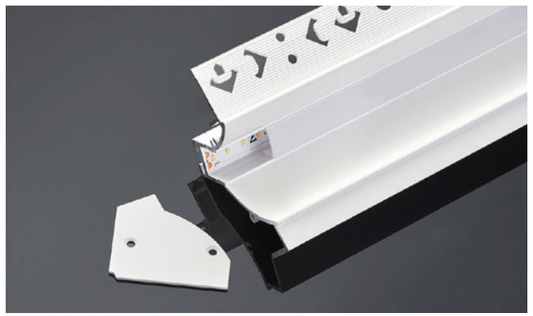

Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500×W73.3×H40mm	
Diffuser	L2500×W13.5×H8.5mm	
Holeless end caps	EC-LR3840(B) L43.3×W40×H1.5mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	




Structure image


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6280-24V-8mm	>90	1650LM/ m	24V	15W/ m	5000×8×1.3mm	280LEDs	7LEDs/ 25mm



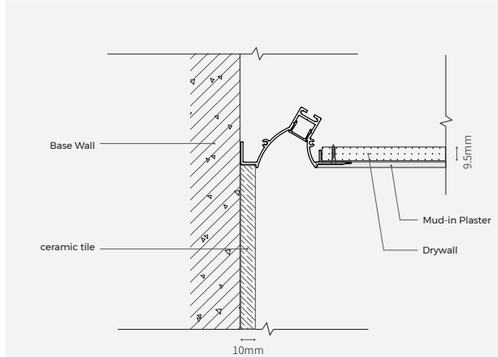

Effect image

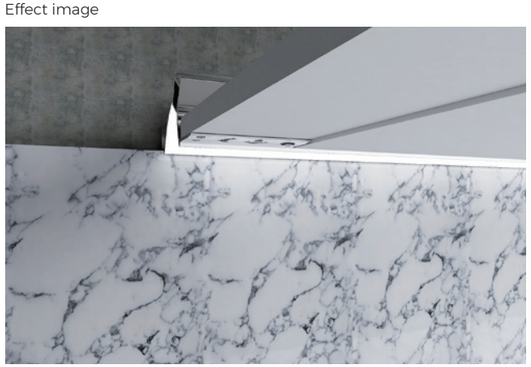

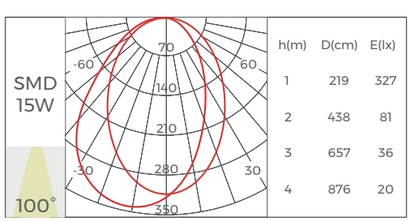

h(m)	D(cm)	E(lx)
1	219	327
2	438	81
3	657	36
4	876	20


LG7043



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach


Profile Components		
Profile	L2500×W43×H70mm	
Diffuser	L2500×W18.9×H6.5mm	
Holeless end caps	EC-LG7043 L70×W43×H2mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	




Structure image


Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm



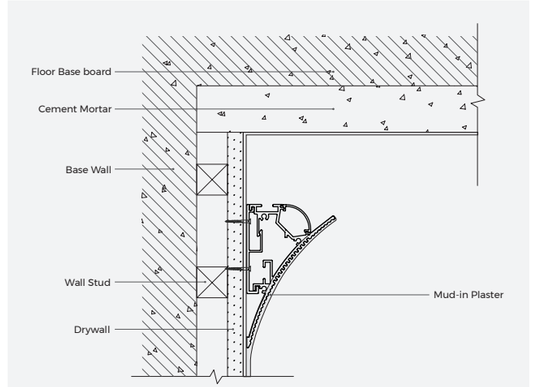

Effect image

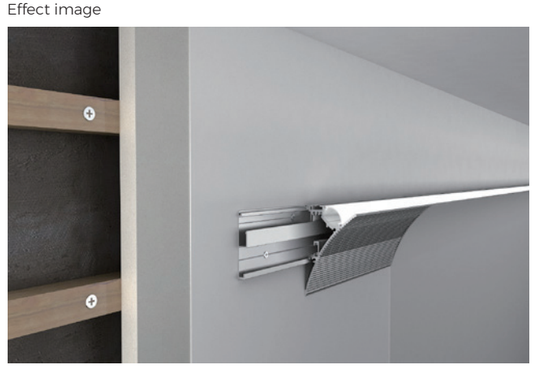

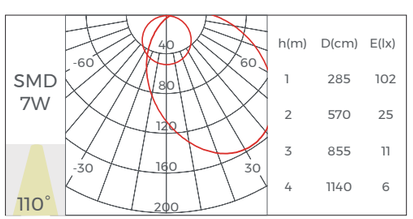

h(m)	D(cm)	E(lx)
1	285	102
2	570	25
3	855	11
4	1140	6

SK6013(A)





Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W13.2×H60mm	
Diffuser	L2500×W10.3×H6.8mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm






Structure image

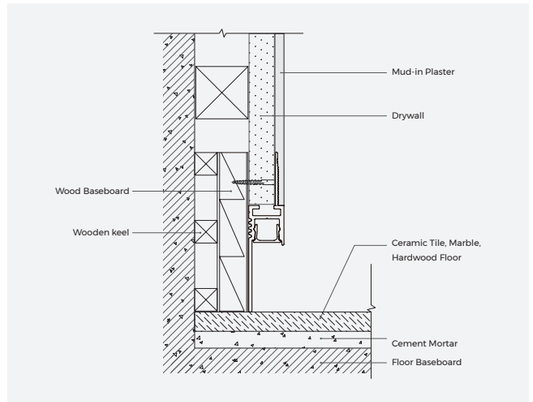

Effect image



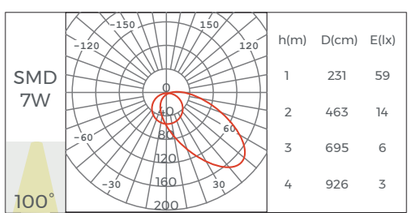

h(m)	D(cm)	E(lx)
1	231	59
2	463	14
3	695	6
4	926	3

SK6013(B)





Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W13.2×H60mm	
Diffuser	L2500×W10.3×H6.8mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm







Structure image

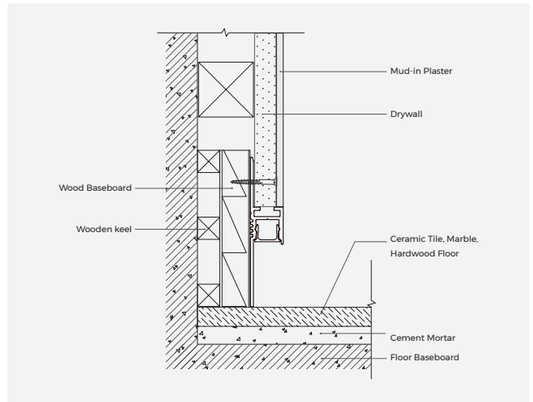


Effect image

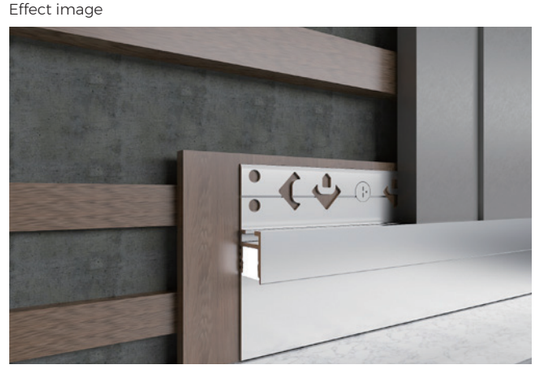

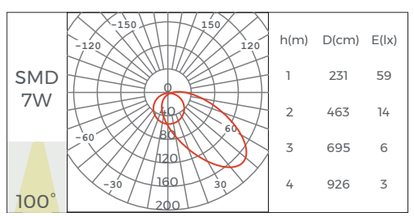

h(m)	D(cm)	E(lx)
1	231	59
2	463	14
3	695	6
4	926	3

SK8513(B)

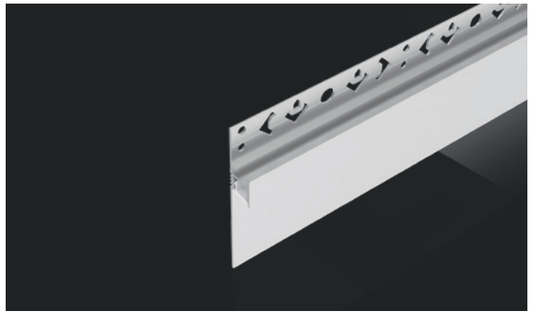



Basic Parameters	
Installation	Trimless recessed
Material	AL6063-T5, spraying surface
Coating	White
Application	Indoor
IP grade	IP20
Warranty	5 years
Certification	Rohs, Reach

Profile Components		
Profile	L2500×W13.2×H85mm	
Diffuser	L2500×W10.3×H6.8mm	


Installation Accessories		
Screw	CL-01 M3.5×40mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm






Structure image

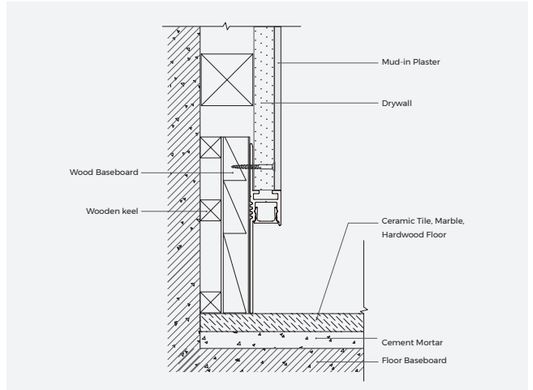

Effect image



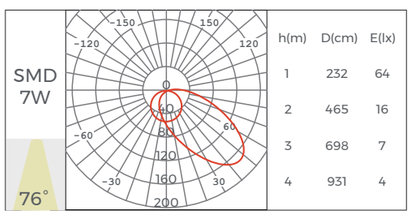


LS2126




Basic Parameters	
Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10


Profile Components		
Profile	L2500×W21.4×H27mm	
Diffuser	L2500×W18×H3.4mm	
Holeless end caps	EC-LS2126 L27×W21.4×H5mm	
End cap with hole	EC-LS2126 L27×W21.4×H5mm	

Light Source							
Flexible Strip							
Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D6140-24V-8mm	>90	710LM/ m	24V	6.6W/ m	5000×8×1.2mm	140LEDs	7LEDs/ 50mm







Structure image

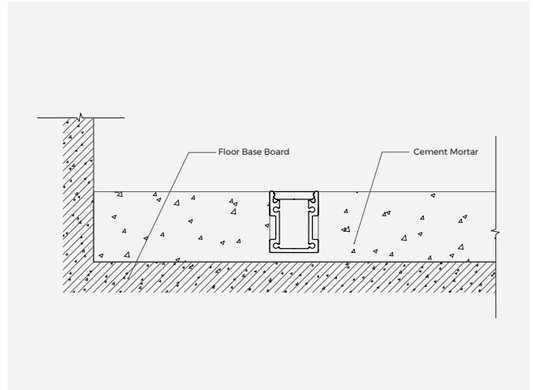

Effect image

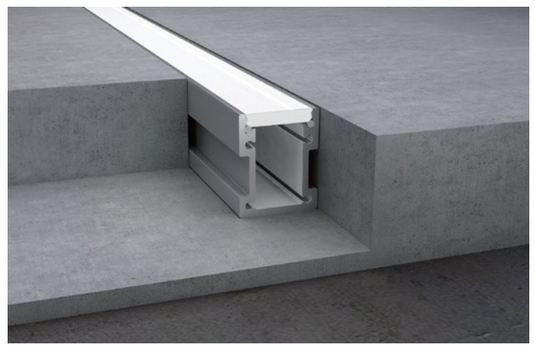

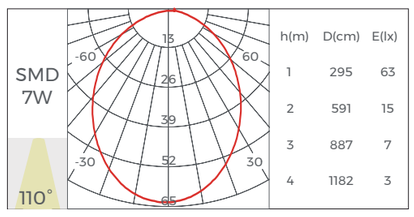

LE2711




Basic Parameters

Installation	Recessed
Material	AL6063-T5
Coating	Silver anodized
Application	Indoor
IP grade	IP65
Warranty	5 years
Certification	Rohs, Reach, IK10

Profile Components

Profile	L2500×W27×H11mm	
Diffuser	L2500×W18×H3.4mm	
Holeless end caps	EC-LE2711 L27.2×W11×H7.8mm	
End cap with hole	EC-LE2711 L27.2×W11×H7.8mm	




Light Source


Flexible Strip

Model	CRI	Lumens	Voltage	Typ.power	Size	LEDs/ meter	Cutting unit
D8168-24V-10mm	>90	1860LM/ M	24V	16.2W/ M	5000x10x1.6mm	168LEDs	7LEDs/ 42mm



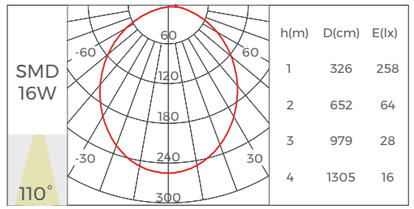

Structure image

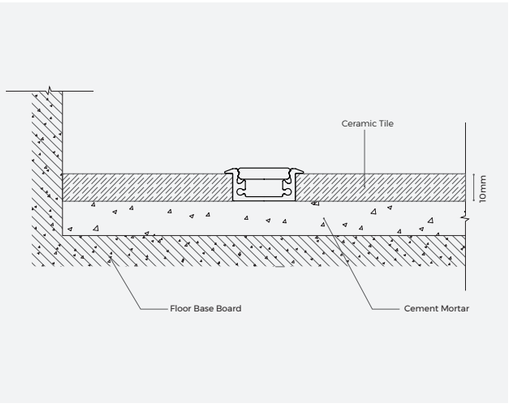

Effect image





Tel: +86-755-2923-1888
E-mail: hc@hcled.com
Web: www.hcled.com
Add: 17F, Block B, Building 2, North of Skyworth
Inno Valley, Shiyan town, Bao'an District, Shenzhen