

**Downlight Specification**

# BR95L2

— **Brook series**



## Basic Parameters

- Material: ADC12, spraying surface
- Driver Installation: Remote
- IP grade: IP65
- CCT: 2700/3000/3500/4000K optional
- CRI: 90
- SDCM(Light source): <3 Step (ANSI)
- Beam angle: 15°/24°/30°/45° optional
- UGR(X=4H,Y=8H): ≤6(15°/24°/30°), ≤13(45°)
- Lighting direction: Downward
- Dimming method: Non / 1-10V / DALI optional
- Input voltage: AC220-240V
- Working temperature: -15°C~30°C
- Application: Indoor/outdoor
- Installation: Recessed
- Certification: CE, ROHS, Reach
- Warranty: 5 years




## Frame Color



White

## Reflector type



Matte black




Matte white



Mirror




Black chrome






Matte Silver

## Optical Accessory



Honeycomb

## Product mechanical data

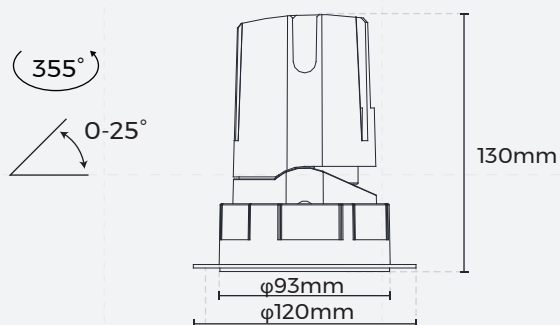

Opening size: φ95mm

## ©Luminaire Parameters

Model	Size (mm)	Opening (mm)	Input	Power.tpy (W)	CRI	CCT	Beam Angle	Lumen (LM)
BR95L2	φ120*130	φ95	36V/500mA	20	>90	3000K	15°	1060
							24°	1200
							30°	1260
							45°	1200
BR95L2	φ120*130	φ95	36V/600mA	25	>90	3000K	24°	1400
							30°	1500
							45°	1400

Note:

1. The above parameters were tested based on Ra90, 3000K, light source;

2700K Light efficiency & Luminous flux=3000K\*0.95

3500K Light efficiency & Luminous flux=3000K\*1.05

4000K Light efficiency & Luminous flux=3000K\*1.08

2. The input voltage and input current belong to the light source.

3. luminous flux is allowed to have a ±10% error range;

4. The above parameters are typical values.


5. Note: If the "Honeycomb" is selected, it will be installed on the spotlight by default, and the parameters will change as follows.

- Spotlights with beam angles of "15°", "24°" and "30°": the light efficiency will be reduced by 30%, the beam Angle will be reduced by 12%, the anti-glare effect will be better, and the UGR will be reduced by 40%.


- Spotlights with beam angles of "45°": the light efficiency will be reduced by 50%, the beam Angle will be reduced by 25%, the anti-glare effect will be better, and the UGR will be reduced by 40%.

## ©Optical Parameter

· Type Power:20W

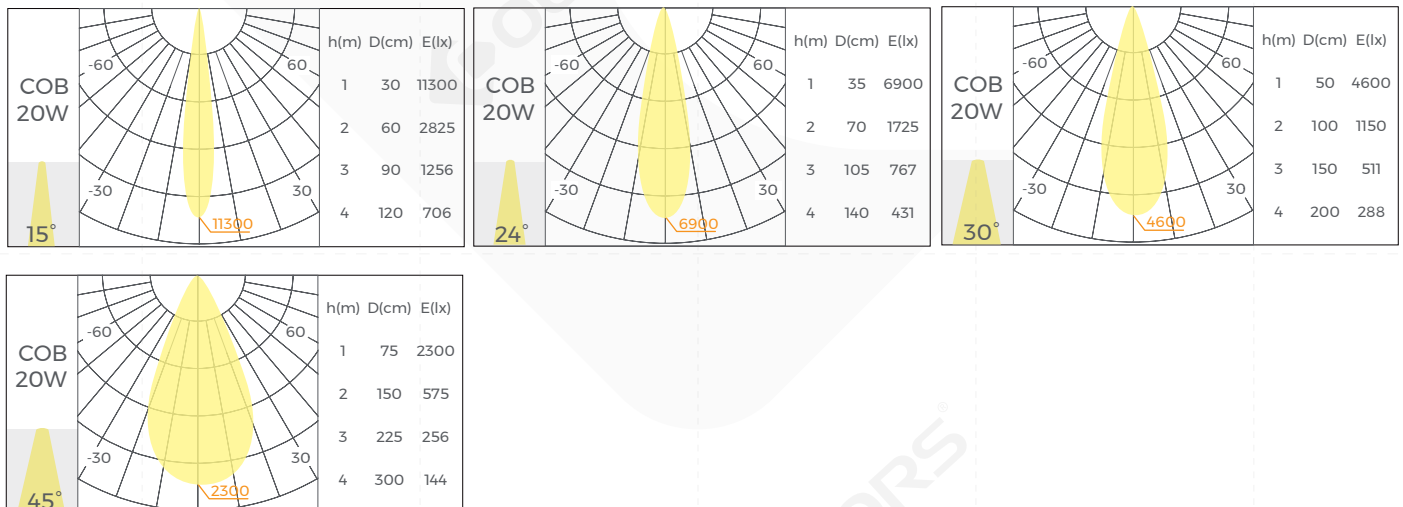

• Type Power:25W

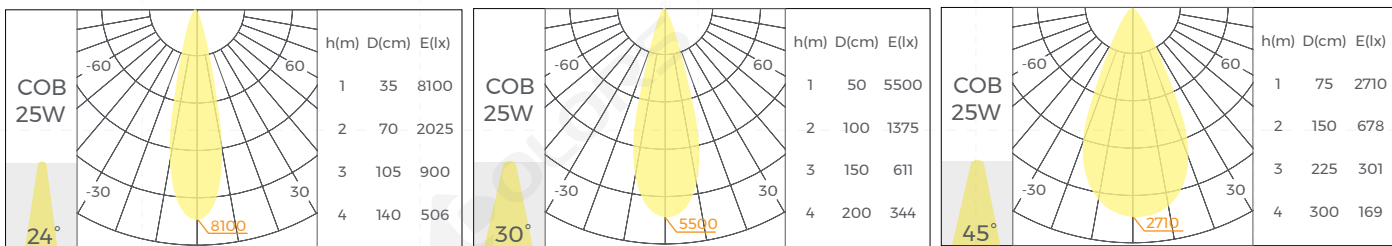


Note:

1. Central light intensity value = 1 meter maximum luminous intensity value;
  1. N meter maximum luminous intensity value = Central light intensity value/N<sup>2</sup>;
- For example: 2 meter maximum luminous intensity value = Central light intensity value/2<sup>2</sup>;

## ◎Packing

Model	Size (mm/box)	Quantity /box	Quantity /carton	NW (kg/box)	NW (kg/carton)	CW (kg)	Size (mm/carton)
DL-BR95L2-XXX	165*125*150	1	20	1	20	24.5	645*345*315

## ◎Model Code

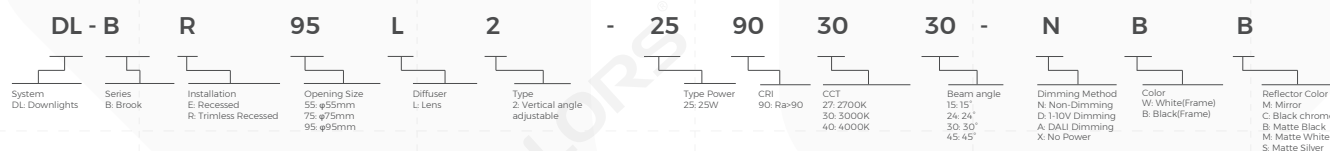

## ◎Attentions

1. Non-professionals are prohibited from installing, disassembling and repairing the product.
2. Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
3. Please use professional cutting tools when cutting.
4. Do not use any acid or alkaline adhesive to fix products.