

Plug-in System **Specification**


HTM53NK-40

— HOLA T series



【Basic Parameters】

- Installation: Ceiling
- Material: AL6063-T5
- Coating: Black(RAL9005)
- Dimming method: Non/DALI-2/CASAMBI
- Input voltage: DC48V
- SDCM: <5 Step (ANSI)
- CRI: 90
- CCT: 2700/3000/4000K optional
- Beam angle: 360°
- Application: Indoor
- IP grade: IP20
- Warranty: 5 years
- Certification: CE、UKCA、ROHS、Reach

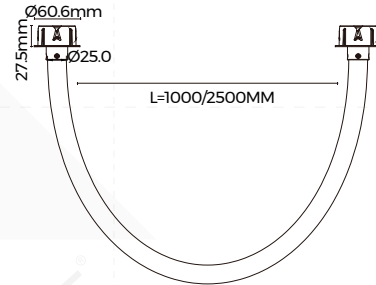

【Luminaire Parameters】



| Version | Model | Length | Input Voltage (V) | Max. Current (A) | Type Power (W) | Max. Power (W) | CRI | CCT | Lumen (LM) |
|---------|------------|--------------------|-------------------|------------------|----------------|----------------|-----|-------|--------------------|
| Normal | HTM53NK-25 | 1000mm [3.28ft] | DC48V | 0.37 | 16 | 17.6 | >90 | 2700K | 1240 [274LM/ft] |
| | | | | | | | | 3000K | 1310 [280LM/ft] |
| | | | | | | | | 4000K | 1395 [299LM/ft] |
| | | 2500mm [8.2ft] | | 0.92 | 40 | 44 | | 2700K | 3100 [274LM/ft] |
| | | | | | | | | 3000K | 3270 [280LM/ft] |
| | | | | | | | | 4000K | 3480 [299LM/ft] |

Note:

1. The above parameters were tested based on Ra90, 4000K, light source;
2. luminous flux is allowed to have a ±10% error range;
3. The above parameters are typical values.

[Product Accessories Information]

| Picture | Section size | Name | Description | Model | Note |
|---|---|--------------------|--|------------------------------|--|
|  |  | Base | Material: PC+ADC12 Input Voltage:DC48V Coating:Black White Installation:Surface Rated Power:150W Rated Current:3A Certification:CE Warranty:5 years Maximum load: 8Kg/Lamp | RA-HM64 | |
|  |  | Base | Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Installation:Trimless recessed Open Size: φ 80mm Rated Power:150W Rated Current:3A Certification:CE Warranty:5 years Maximum load: 1Kg/Lamp | RA-HE80 | |
|  |  | Base | Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Installation:Trimless recessed Open Size: φ 65mm Rated Power:150W Rated Current:3A Certification:CE Warranty:5 years Maximum load: 8Kg/Lamp | RA-HR65 | |
|  |  | Quick connector | Material:PA6 Size:L38*W9.4*H10.5mm [Inch Size: L1.5"*W0.37"*H0.41"] Applicable wires: solid wire:0.5-4mm ² stranded wire:0.5-2.5mm ² Rated Voltage:250V/600V Rated Current:32A Certification:CE Warranty:3 years | TB-02 | |
|  |  | CASAMBI controller | Dimming mode: CASAMBI Size :180*42*25mm [Inch Size:7.09"*1.65"*0.98"] Input voltage :24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices:≤64 Control groups:≤8 Certification:CE,UKCA Warranty:5 years | 1200EN1612-CAS -0-0000003 | Controller should be used with DALI dimming modules. |

| | | | | | |
|---|---|---------------------|---|--------------------|-------------------------------------|
|  |  <p>100/150W</p> <p>250W</p> | <p>Power supply</p> | <p>Dimming mode: Non-dimming Input: AC220-240V~ 50/60Hz PF:≥0.95 Output voltage:48VDC Output current:2.1/3.13/5.21A Power:100/150/250w Efficiency:0.9</p> | <p>BN-V48-XXXP</p> | <p>Power supply Accessories</p> |
|---|---|---------------------|---|--------------------|-------------------------------------|

Note:

1. Max. power cable (16AWG main cable) of base ≤ 50M
2. Total power of modules during work < 80%~85% output power of supply

[Packing]

| Model | Size (mm/box) | Quantity /box | Quantity /carton | NW (kg/box) | NW (kg/carton) | GW (kg) | Size (mm/carton) |
|----------------------|---------------|---------------|------------------|-------------|----------------|---------|-----------------------------------|
| FD-HTM53NK401000-XXX | / | / | 3 | / | 4.8 | 7.1 | 590*590*210 (23.2"*23.2"*8.3") |
| FD-HTM53NK402500-XXX | / | / | 2 | / | 12 | 10.5 | 590*590*210 (23.2"*23.2"*8.3") |

[Attentions]

1. Non-professionals are prohibited from installing, disassembling and repairing the product
2. Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
3. Please use professional cutting tools when cutting
4. Do not use any acid or alkaline adhesive to fix products
5. The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment
6. PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use.
7. The insertion and removal of the base and lighting module shall not exceed 50 times