

**KING 2** Wall

# K2W73L1D



# K2W73L1D

## Basic Parameters

|                     |                        |
|---------------------|------------------------|
| Application         | Indoor                 |
| Material            | AL1070, Powder Coating |
| Coating             | Black,White            |
| IP Grade            | IP65                   |
| Warranty            | 5 years                |
| Working Temperature | -15℃~35℃               |


## Electrical Parameters

|           |                            |
|-----------|----------------------------|
| Typ.power | 2x7W                       |
| Control   | Non-Dimming, Triac Dimming |

## Optical Parameters

|            |                                            |
|------------|--------------------------------------------|
| LED        | COB Light Source >50,000h-L80-B10 (Ta 25℃) |
| SDCM       | <3 Step                                    |
| CRI        | >90                                        |
| CCT        | 2700K,3000K,3500K,4000K                    |
| Beam Angle | 36°                                        |

## Dimensions

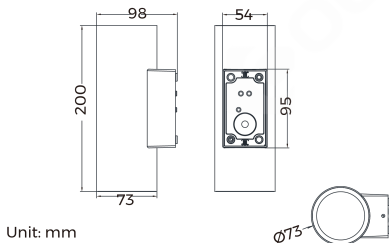

## Luminaire Parameters

| Type Power (W) | Input Voltage(LED) (V) | Input Current (mA) | CCT   | Beam Angle | Luminaire Luminous Flux(lm) | UGR | Center Beam Candlepower (CBCP) | Beam Diameter |
|----------------|------------------------|--------------------|-------|------------|-----------------------------|-----|--------------------------------|---------------|
| 2*7W           | 36V                    | 0.35A              | 2700K | 36°        | 1090                        | ≤16 | 1250                           | 63            |
| 2*7W           | 36V                    | 0.35A              | 3000K | 36°        | 1150                        | ≤16 | 1300                           | 63            |
| 2*7W           | 36V                    | 0.35A              | 3500K | 36°        | 1185                        | ≤16 | 1350                           | 63            |
| 2*7W           | 36V                    | 0.35A              | 4000K | 36°        | 1210                        | ≤16 | 1400                           | 63            |

Note:

1. The above parameters are tested based on the light source with Color Rendering Index Ra90 and 3000K.
2. The input voltage and input current belong to the light source.
3. The brand of the light source is CREE.
4. The brand of the power supply is LIFUD.
5. Incorporation of any of the following—honeycomb filter, Linear Spread Filter, or Diffusion Filter—will reduce luminous efficacy, UGR, and beam angle.
6. luminous flux is allowed to have a ±10% tolerance.
7. The above parameters are typical values.

## Light Distribution

## Packing

| Size (mm/box)   | Quantity /box | QTY/CTN | N.WT (kg/box) | G.WT (kg/box) | G.WT (kg/ctn) | Size (mm/carton) |
|-----------------|---------------|---------|---------------|---------------|---------------|------------------|
| L234*W132*H81mm | 1             | 24      | 0.5           | 0.51          | 12.24         | L483*W412*H346mm |

## Attentions

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting.
- 4、 Do not use any acid or alkaline adhesive to fix products.
- 5、 The product can be used in outdoor or indoor.