


# Infinite System Specification


## — Hexagon series




H-CE3535D  
H-CE5035D  
H-CE7035D  
H-CE3535P  
H-CE5035P  
H-CE7035P

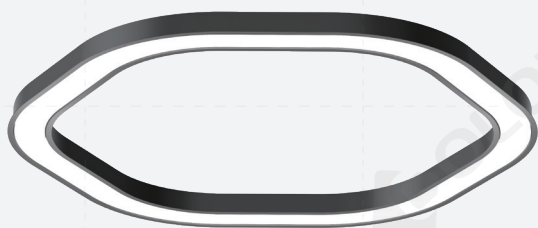


Optical: Diffuser

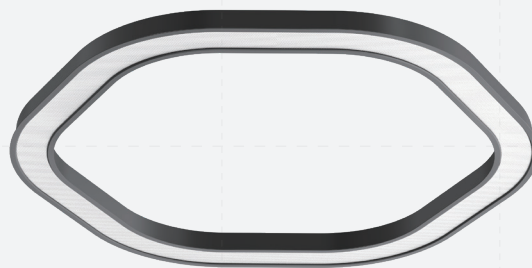


Optical: Prismatic



Model:  
H-CE3535D  
H-CE3535P



Model:  
H-CE5035D  
H-CE5035P



Model:  
H-CE7035D  
H-CE7035P

## Basic Information

### Light efficiency

|                                                                |                                                                |
|----------------------------------------------------------------|----------------------------------------------------------------|
| <b>H-CE3535D</b><br>100LM/W(Regular), 120LM/W(High-Efficiency) | <b>H-CE3535P</b><br>85LM/W(Regular), 105LM/W(High-Efficiency)  |
| <b>H-CE5035D</b><br>100LM/W(Regular), 120LM/W(High-Efficiency) | <b>H-CE5035P</b><br>90LM/W(Regular), 105LM/W(High-Efficiency)  |
| <b>H-CE7035D</b><br>110LM/W(Regular), 135LM/W(High-Efficiency) | <b>H-CE7035P</b><br>100LM/W(Regular), 120LM/W(High-Efficiency) |













### Side length


|                                                                              |                                                      |
|------------------------------------------------------------------------------|------------------------------------------------------|
| <b>H-CE3535D/H-CE3535P/H-CE5035D/H-CE5035P</b><br>375/450/600/750/900/1200mm | <b>H-CE7035D/H-CE7035P</b><br>450/600/750/900/1200mm |
|------------------------------------------------------------------------------|------------------------------------------------------|

## Common information


|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| · Material:       | AL6063-T5, spraying surface                                    |
| · Color:          | Black/White/Silver/Orange/Blue/Green /Rose gold/Champagne gold |
| · IP grade:       | IP20                                                           |
| · CCT:            | 2700/3000/3500/4000/5000/6500K                                 |
| · CRI:            | >80/>90                                                        |
| · SDCM:           | ≤3 Step                                                        |
| · Dimming method: | Non-dimming, 1-10V, DALI2+PUSH                                 |
| · Application:    | Indoor                                                         |
| · Installation:   | Recessed                                                       |
| · Certification:  | CE, UKCA, ROHS, REACH, CB, ENEC, ETL, LM-80                    |
| · Warranty:       | 5 years                                                        |

## © Product Dimension Information

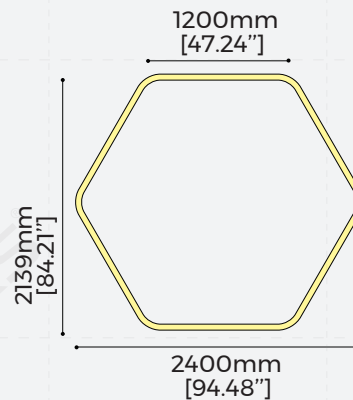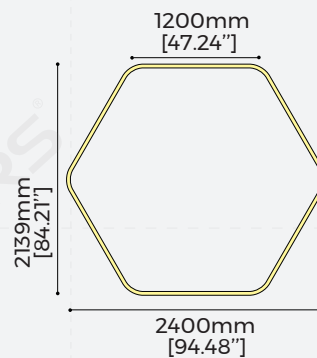

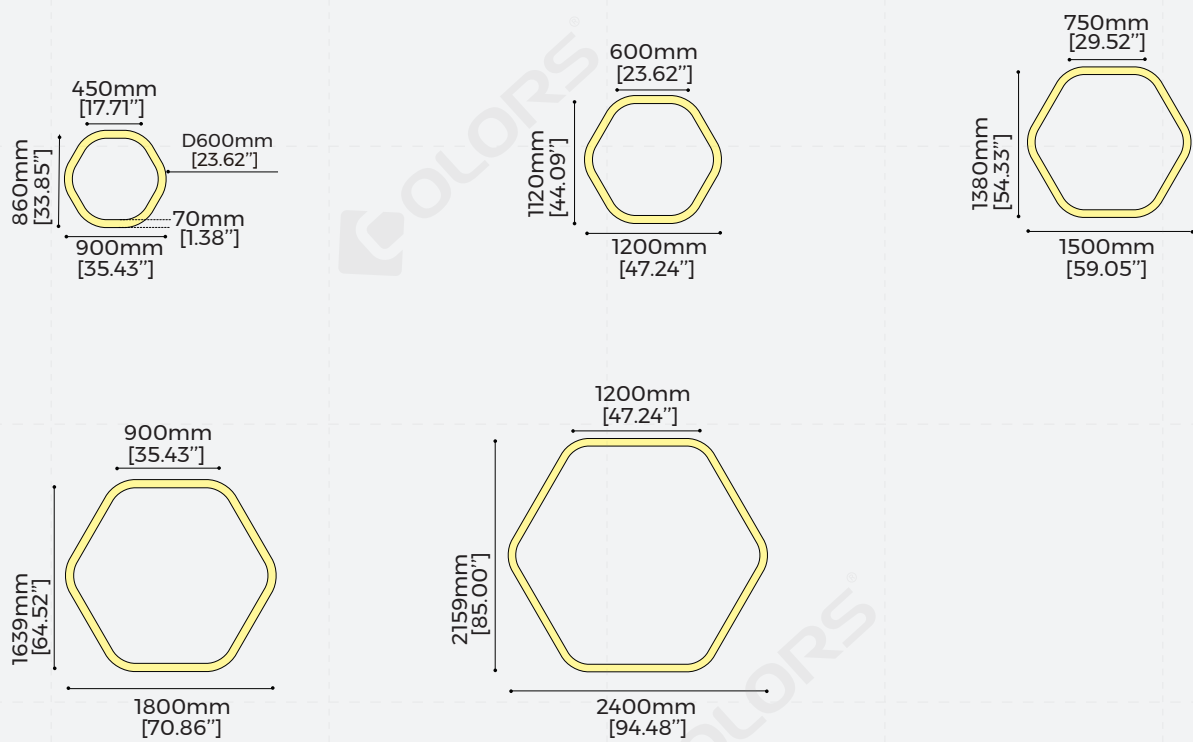

Case 1: For length of sides  $\leq 600$ mm, the lamp is to be produced as complete unit.

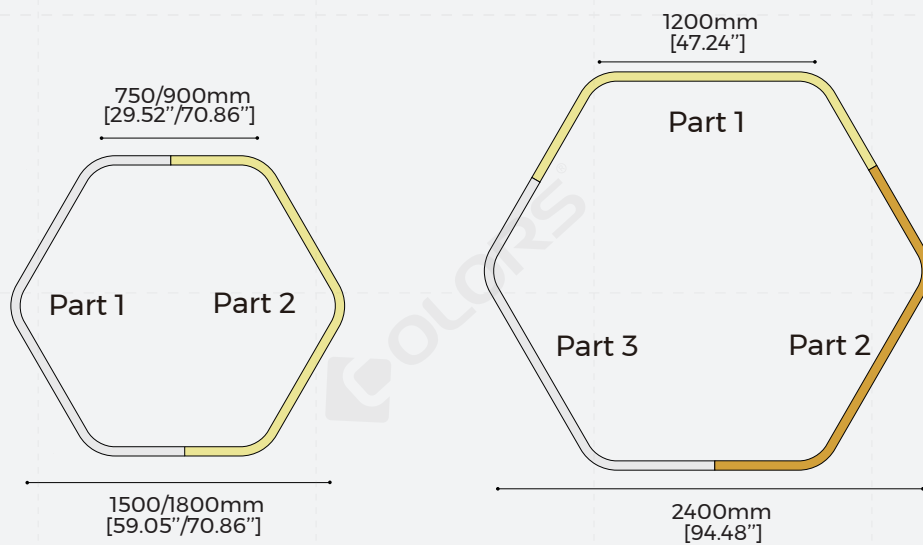

Case 2: For length of side  $> 600$ mm, the lamp is to be divided into parts

## © Luminaire Parameters

| Model     | Version         | Length (mm)      | Type Power (W/PCS) | Input Voltage (V) | Input Current (mA) | CRI | Lumens (LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|--------------------|-------------------|--------------------|-----|-----------------|----------------------------------------------------|
| H-CE3535D | Regular         | 375<br>[1.23ft]  | 45                 | AC200-240V        | 230                | >80 | 4500            | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                    |                   |                    | >90 | 3870            |                                                    |
|           |                 | 450<br>[1.48ft]  | 54                 | AC200-240V        | 270                | >80 | 5400            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 4644            |                                                    |
|           |                 | 600<br>[1.97ft]  | 72                 | AC200-240V        | 360                | >80 | 7200            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 6192            |                                                    |
|           |                 | 750<br>[2.46ft]  | 90                 | AC200-240V        | 450                | >80 | 9000            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 7740            |                                                    |
|           |                 | 900<br>[2.95ft]  | 108                | AC200-240V        | 550                | >80 | 10800           |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 9288            |                                                    |
|           |                 | 1200<br>[3.94ft] | 144                | AC200-240V        | 730                | >80 | 14400           |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 12384           |                                                    |
|           | High-Efficiency | 375<br>[1.23ft]  | 45                 | AC200-240V        | 230                | >80 | 5400            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 4644            |                                                    |
|           |                 | 450<br>[1.48ft]  | 54                 | AC200-240V        | 270                | >80 | 6480            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 5573            |                                                    |
|           |                 | 600<br>[1.97ft]  | 72                 | AC200-240V        | 360                | >80 | 8640            |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 7430            |                                                    |
|           |                 | 750<br>[2.46ft]  | 90                 | AC200-240V        | 450                | >80 | 10800           |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 9288            |                                                    |
|           |                 | 900<br>[2.95ft]  | 108                | AC200-240V        | 550                | >80 | 12960           |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 11146           |                                                    |
|           |                 | 1200<br>[3.94ft] | 144                | AC200-240V        | 730                | >80 | 17280           |                                                    |
|           |                 |                  |                    |                   |                    | >90 | 14861           |                                                    |

| Model     | Version         | Length<br>(mm)   | Type Power<br>(W/PCS) | Input<br>Voltage<br>(V) | Input<br>Current<br>(mA) | CRI | Lumens<br>(LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|-----------------------|-------------------------|--------------------------|-----|--------------------|----------------------------------------------------|
| H-CE3535P | Regular         | 375<br>[1.23ft]  | 45                    | AC200-240V              | 230                      | >80 | 3825               | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                       |                         |                          | >90 | 3290               |                                                    |
|           |                 | 450<br>[1.48ft]  | 54                    | AC200-240V              | 270                      | >80 | 4590               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 3947               |                                                    |
|           |                 | 600<br>[1.97ft]  | 72                    | AC200-240V              | 360                      | >80 | 6120               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5263               |                                                    |
|           |                 | 750<br>[2.46ft]  | 90                    | AC200-240V              | 450                      | >80 | 7650               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 6579               |                                                    |
|           |                 | 900<br>[2.95ft]  | 108                   | AC200-240V              | 550                      | >80 | 9180               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 7895               |                                                    |
|           |                 | 1200<br>[3.94ft] | 144                   | AC200-240V              | 730                      | >80 | 12240              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 10526              |                                                    |
|           | High-Efficiency | 375<br>[1.23ft]  | 45                    | AC200-240V              | 230                      | >80 | 4725               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 4064               |                                                    |
|           |                 | 450<br>[1.48ft]  | 54                    | AC200-240V              | 270                      | >80 | 5670               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 4876               |                                                    |
|           |                 | 600<br>[1.97ft]  | 72                    | AC200-240V              | 360                      | >80 | 7560               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 6502               |                                                    |
|           |                 | 750<br>[2.46ft]  | 90                    | AC200-240V              | 450                      | >80 | 9450               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 8127               |                                                    |
|           |                 | 900<br>[2.95ft]  | 108                   | AC200-240V              | 550                      | >80 | 11340              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9752               |                                                    |
|           |                 | 1200<br>[3.94ft] | 144                   | AC200-240V              | 730                      | >80 | 15120              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 13003              |                                                    |

| Model     | Version         | Length<br>(mm)   | Type Power<br>(W/PCS) | Input<br>Voltage<br>(V) | Input<br>Current<br>(mA) | CRI | Lumens<br>(LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|-----------------------|-------------------------|--------------------------|-----|--------------------|----------------------------------------------------|
| H-CE5035D | Regular         | 375<br>[1.23ft]  | 56                    | AC200-240V              | 280                      | >80 | 5600               | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                       |                         |                          | >90 | 4816               |                                                    |
|           |                 | 450<br>[1.48ft]  | 66                    | AC200-240V              | 330                      | >80 | 6600               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5676               |                                                    |
|           |                 | 600<br>[1.97ft]  | 90                    | AC200-240V              | 450                      | >80 | 9000               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 7740               |                                                    |
|           |                 | 750<br>[2.46ft]  | 110                   | AC200-240V              | 560                      | >80 | 11000              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9460               |                                                    |
|           |                 | 900<br>[2.95ft]  | 132                   | AC200-240V              | 670                      | >80 | 13200              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 11352              |                                                    |
|           |                 | 1200<br>[3.94ft] | 176                   | AC200-240V              | 890                      | >80 | 17600              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 15136              |                                                    |
|           | High-Efficiency | 375<br>[1.23ft]  | 56                    | AC200-240V              | 280                      | >80 | 6720               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5779               |                                                    |
|           |                 | 450<br>[1.48ft]  | 66                    | AC200-240V              | 330                      | >80 | 7920               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 6811               |                                                    |
|           |                 | 600<br>[1.97ft]  | 90                    | AC200-240V              | 450                      | >80 | 10800              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9288               |                                                    |
|           |                 | 750<br>[2.46ft]  | 110                   | AC200-240V              | 560                      | >80 | 13200              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 11352              |                                                    |
|           |                 | 900<br>[2.95ft]  | 132                   | AC200-240V              | 670                      | >80 | 15840              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 13622              |                                                    |
|           |                 | 1200<br>[3.94ft] | 176                   | AC200-240V              | 890                      | >80 | 21120              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 18163              |                                                    |

| Model     | Version         | Length<br>(mm)   | Type Power<br>(W/PCS) | Input<br>Voltage<br>(V) | Input<br>Current<br>(mA) | CRI | Lumens<br>(LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|-----------------------|-------------------------|--------------------------|-----|--------------------|----------------------------------------------------|
| H-CE5035P | Regular         | 375<br>[1.23ft]  | 56                    | AC200-240V              | 280                      | >80 | 5040               | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                       |                         |                          | >90 | 4334               |                                                    |
|           |                 | 450<br>[1.48ft]  | 66                    | AC200-240V              | 330                      | >80 | 5940               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5108               |                                                    |
|           |                 | 600<br>[1.97ft]  | 90                    | AC200-240V              | 450                      | >80 | 8100               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 6966               |                                                    |
|           |                 | 750<br>[2.46ft]  | 110                   | AC200-240V              | 560                      | >80 | 9900               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 8514               |                                                    |
|           |                 | 900<br>[2.95ft]  | 132                   | AC200-240V              | 670                      | >80 | 11880              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 10217              |                                                    |
|           |                 | 1200<br>[3.94ft] | 176                   | AC200-240V              | 890                      | >80 | 15840              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 13622              |                                                    |
|           | High-Efficiency | 375<br>[1.23ft]  | 56                    | AC200-240V              | 280                      | >80 | 5880               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5057               |                                                    |
|           |                 | 450<br>[1.48ft]  | 66                    | AC200-240V              | 330                      | >80 | 6930               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 5960               |                                                    |
|           |                 | 600<br>[1.97ft]  | 90                    | AC200-240V              | 450                      | >80 | 9450               |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 8127               |                                                    |
|           |                 | 750<br>[2.46ft]  | 110                   | AC200-240V              | 560                      | >80 | 11550              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9933               |                                                    |
|           |                 | 900<br>[2.95ft]  | 132                   | AC200-240V              | 670                      | >80 | 13860              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 11920              |                                                    |
|           |                 | 1200<br>[3.94ft] | 176                   | AC200-240V              | 890                      | >80 | 18480              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 15893              |                                                    |

| Model     | Version         | Length<br>(mm)   | Type Power<br>(W/PCS) | Input<br>Voltage<br>(V) | Input<br>Current<br>(mA) | CRI | Lumens<br>(LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|-----------------------|-------------------------|--------------------------|-----|--------------------|----------------------------------------------------|
| H-CE7035D | Regular         | 450<br>[1.48ft]  | 90                    | AC200-240V              | 450                      | >80 | 9900               | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                       |                         |                          | >90 | 8514               |                                                    |
|           |                 | 600<br>[1.97ft]  | 116                   | AC200-240V              | 590                      | >80 | 12760              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 10974              |                                                    |
|           |                 | 750<br>[2.46ft]  | 148                   | AC200-240V              | 750                      | >80 | 16280              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 14001              |                                                    |
|           |                 | 900<br>[2.95ft]  | 176                   | AC200-240V              | 890                      | >80 | 19360              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 16650              |                                                    |
|           |                 | 1200<br>[3.94ft] | 235                   | AC200-240V              | 1190                     | >80 | 25850              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 22231              |                                                    |
|           | High-Efficiency | 450<br>[1.48ft]  | 90                    | AC200-240V              | 450                      | >80 | 12150              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 10449              |                                                    |
|           |                 | 600<br>[1.97ft]  | 116                   | AC200-240V              | 590                      | >80 | 15660              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 13468              |                                                    |
|           |                 | 750<br>[2.46ft]  | 148                   | AC200-240V              | 750                      | >80 | 19980              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 17183              |                                                    |
|           |                 | 900<br>[2.95ft]  | 176                   | AC200-240V              | 890                      | >80 | 23760              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 20434              |                                                    |
|           |                 | 1200<br>[3.94ft] | 235                   | AC200-240V              | 1190                     | >80 | 31725              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 27284              |                                                    |

| Model     | Version         | Length<br>(mm)   | Type Power<br>(W/PCS) | Input<br>Voltage<br>(V) | Input<br>Current<br>(mA) | CRI | Lumens<br>(LM/PCS) | CCT                                                |
|-----------|-----------------|------------------|-----------------------|-------------------------|--------------------------|-----|--------------------|----------------------------------------------------|
| H-CE7035P | Regular         | 450<br>[1.48ft]  | 90                    | AC200-240V              | 450                      | >80 | 9000               | 2700K<br>3000K<br>3500K<br>4000K<br>5000K<br>6500K |
|           |                 |                  |                       |                         |                          | >90 | 7740               |                                                    |
|           |                 | 600<br>[1.97ft]  | 116                   | AC200-240V              | 590                      | >80 | 11600              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9976               |                                                    |
|           |                 | 750<br>[2.46ft]  | 148                   | AC200-240V              | 750                      | >80 | 14800              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 12728              |                                                    |
|           |                 | 900<br>[2.95ft]  | 176                   | AC200-240V              | 890                      | >80 | 17600              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 15136              |                                                    |
|           |                 | 1200<br>[3.94ft] | 235                   | AC200-240V              | 1190                     | >80 | 23500              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 20210              |                                                    |
|           | High-Efficiency | 450<br>[1.48ft]  | 90                    | AC200-240V              | 450                      | >80 | 10800              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 9288               |                                                    |
|           |                 | 600<br>[1.97ft]  | 116                   | AC200-240V              | 590                      | >80 | 13920              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 11971              |                                                    |
|           |                 | 750<br>[2.46ft]  | 148                   | AC200-240V              | 750                      | >80 | 17760              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 15274              |                                                    |
|           |                 | 900<br>[2.95ft]  | 176                   | AC200-240V              | 890                      | >80 | 21120              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 18163              |                                                    |
|           |                 | 1200<br>[3.94ft] | 235                   | AC200-240V              | 1190                     | >80 | 28200              |                                                    |
|           |                 |                  |                       |                         |                          | >90 | 24252              |                                                    |

Note:

1. The output data is based on white coated luminaire with Ra80,4000K.
2. The above Lumens data are at 4000K color temperature.
3. High-efficiency version does not do 3500K and 5000K
4. The tolerance of output data can be vary up to 15%.
5. The output data is typical value.
6. The following is an example of lumen conversion instructions:

| CCT   | RA | Ratio of lumens<br>(white coated<br>luminaire) | Ratio of lumens<br>(Other coated colors of luminaire)                   |
|-------|----|------------------------------------------------|-------------------------------------------------------------------------|
| 2700K | 80 | 90%                                            | Calculate white coated luminaire lumens first, then multiply<br>by 90 % |
|       | 90 | 77%                                            |                                                                         |
| 3000K | 80 | 93%                                            |                                                                         |
|       | 90 | 80%                                            |                                                                         |
| 3500K | 80 | 97%                                            |                                                                         |
|       | 90 | 83%                                            |                                                                         |
| 4000K | 80 | 100%                                           |                                                                         |
|       | 90 | 86%                                            |                                                                         |
| 5000K | 80 | 100%                                           |                                                                         |
|       | 90 | 86%                                            |                                                                         |
| 6500K | 80 | 100%                                           |                                                                         |
|       | 90 | 86%                                            |                                                                         |


Note: All other lumens are to be based on white coated luminaire with 4000K,RA80(100%);and multiplied by the percentage in the table above.

Assuming a 4000K, RA80 white coated luminaire with 1000lm lumens:


|                                                                             |                                               |
|-----------------------------------------------------------------------------|-----------------------------------------------|
| Example 1: If you need 4000K,RA90 lumens (white coated luminaire)           | $1000 \times 86\% = 860\text{lm}$             |
| Example 2: If you need 4000K,RA90 lumens (other coated colors of luminaire) | $1000 \times 86\% \times 90\% = 774\text{lm}$ |
| Example 3: If you need 3000K,RA80 lumens (white coated luminaire)           | $1000 \times 93\% = 930\text{lm}$             |
| Example 4: If you need 3000K,RA90 lumens (white coated luminaire)           | $1000 \times 80\% = 800\text{lm}$             |
| Example 5: If you need 5000K,RA80 lumens (white coated luminaire)           | $1000 \times 100\% = 1000\text{lm}$           |

## © Optical Parameter

### [H-CE3535D]

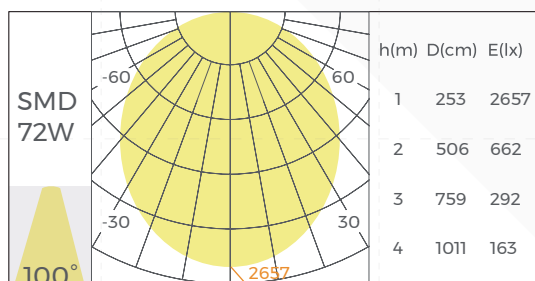


Regular version

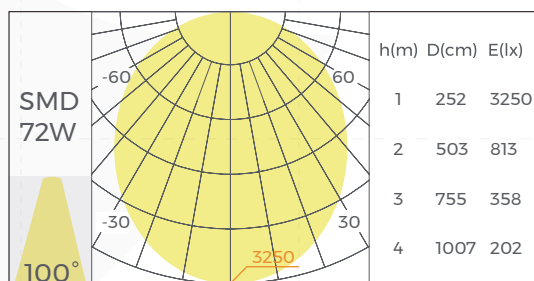


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## 【H-CE3535P】

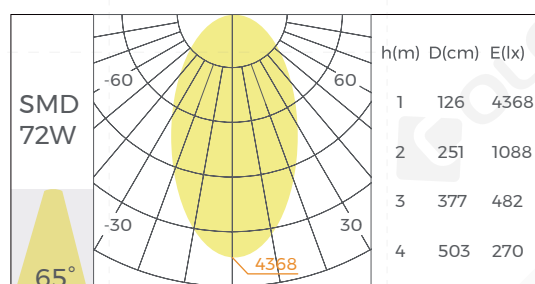


Regular version

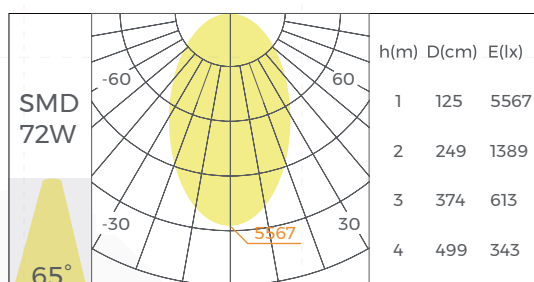


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## 【H-CE5035D】

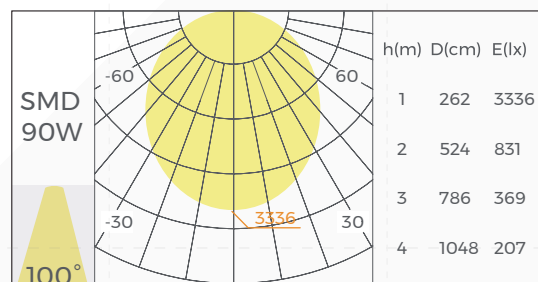


Regular version

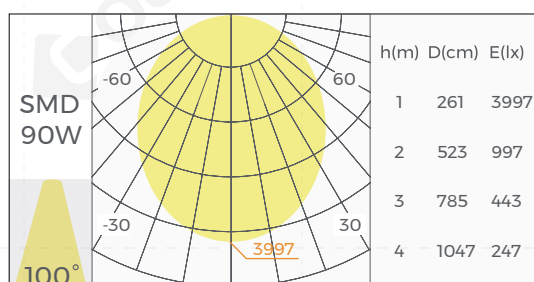


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## 【H-CE5035P】

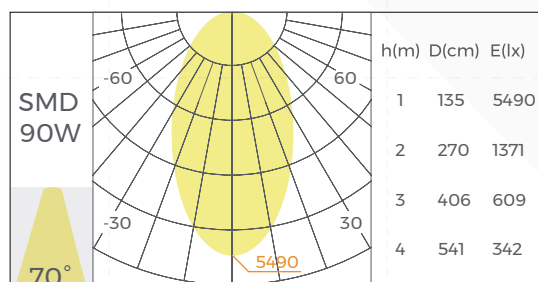


Regular version

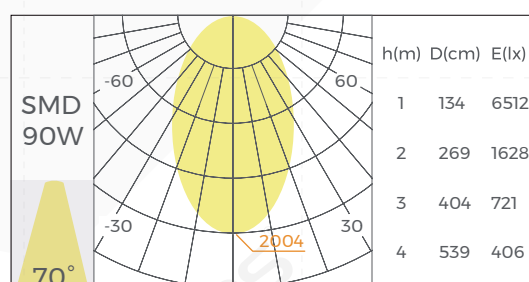


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## 【H-CE7035D】

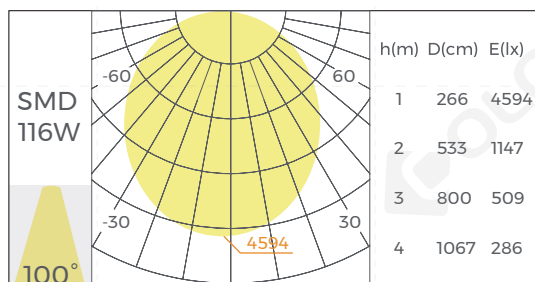


Regular version

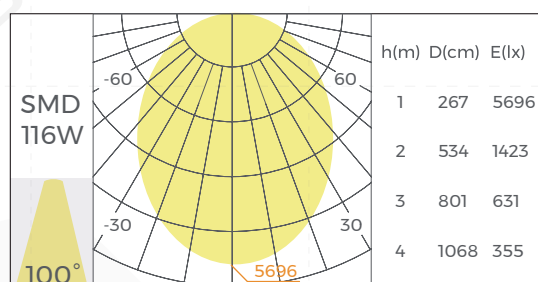


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## 【H-CE7035P】

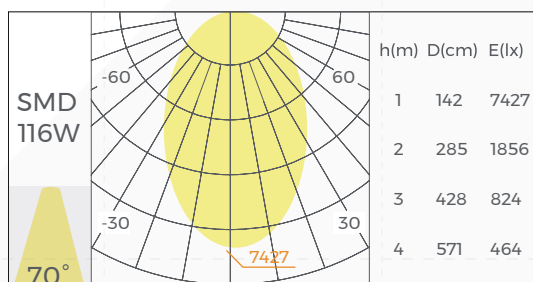

Regular version

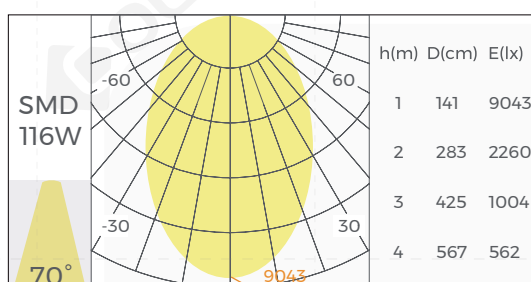


High-efficiency version

\*The above data is based on a 600mm side length luminaire with Ra80,4000K.

## ◎ Installation

### External power supply

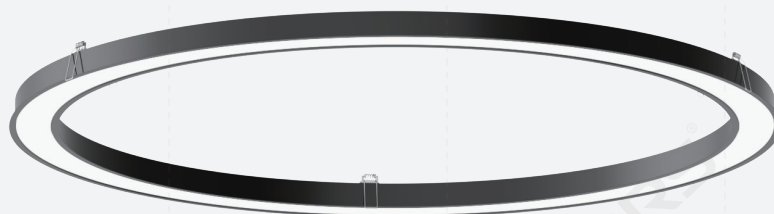

Recessed

Note:

1. The above illustration shows the installation method.
2. The above luminaire shape is for installation illustration only.

◎Packing

| Model                     | Quantity<br>(PCS/carton) | NW<br>(kg/carton) | GW<br>(kg/carton) | Size<br>(mm/carton)                     |
|---------------------------|--------------------------|-------------------|-------------------|-----------------------------------------|
| H-CE3535D0375(R)-N840W045 | 4                        | 7.05              | 9.45              | 800*750*380<br>[31.49"*29.52"*14.96"]   |
| H-CE3535D0450(R)-N840W054 | 4                        | 8.49              | 11.69             | 950*890*380<br>[37.40"*35.03"*14.96"]   |
| H-CE3535D0600(R)-N840W072 | 4                        | 11.37             | 15.37             | 1260*1160*380<br>[49.60"*45.66"*14.96"] |
| H-CE3535D0750(R)-N840W090 | 4                        | 14.25             | 19.05             | 1410*800*520<br>[55.51"*31.49"*20.47"]  |
| H-CE3535D0900(R)-N840W108 | 2                        | 8.56              | 11.36             | 1860*460*460<br>[73.22"*18.11"*18.11"]  |
| H-CE3535D1200(R)-N840W144 | 2                        | 11.44             | 14.64             | 1900*580*460<br>[74.80"*22.83"*18.11"]  |
| H-CE5035D0375(R)-N840W056 | 4                        | 8.81              | 11.21             | 800*750*380<br>[31.49"*29.52"*14.96"]   |
| H-CE5035D0450(R)-N840W066 | 4                        | 10.61             | 13.81             | 950*890*380<br>[37.40"*35.03"*14.96"]   |
| H-CE5035D0600(R)-N840W090 | 4                        | 14.21             | 18.21             | 1260*1160*380<br>[49.60"*45.66"*14.96"] |
| H-CE5035D0750(R)-N840W110 | 4                        | 17.81             | 22.61             | 1410*800*520<br>[55.51"*31.49"*20.47"]  |
| H-CE5035D0900(R)-N840W132 | 2                        | 10.71             | 13.51             | 1860*460*460<br>[73.22"*18.11"*18.11"]  |
| H-CE5035D1200(R)-N840W176 | 2                        | 14.31             | 17.51             | 1900*580*460<br>[74.80"*22.83"*18.11"]  |
| H-CE7035D0450(R)-N840W090 | 4                        | 12.84             | 15.24             | 950*890*380<br>[37.40"*35.03"*14.96"]   |
| H-CE7035D0600(R)-N840W116 | 4                        | 17.16             | 20.36             | 1260*1160*380<br>[49.60"*45.66"*14.96"] |
| H-CE7035D0750(R)-N840W148 | 4                        | 15.00             | 19.00             | 1410*800*520<br>[55.51"*31.49"*20.47"]  |

| Model                     | Quantity<br>(PCS/carton) | NW<br>(kg/carton) | GW<br>(kg/carton) | Size<br>(mm/carton)                    |
|---------------------------|--------------------------|-------------------|-------------------|----------------------------------------|
| H-CE7035D0900(R)-N840W176 | 2                        | 12.90             | 15.30             | 1860*460*460<br>[73.22"*18.11"*18.11"] |
| H-CE7035D1200(R)-N840W235 | 2                        | 17.22             | 20.02             | 1900*580*460<br>[74.80"*22.83"*18.11"] |

Note:

1. Lamps packaged without inner box, directly use the outer box.
2. Use one outer box for each lamp, and then use the wrap and corner protectors to tie them together according to the quantity of carton above.
3. The above weight data is for reference, the exact data should be based on the weight of the physical weighing shall prevail.

## Model Code

| H                                                                                                                                                 | - | C                                        | E                                                 | 3535                                                               | D                                           | 0600                  | (R)                                             | - | N                                                       | 8                           | 40                                         | B                                          | - | 072                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------|-----------------------|-------------------------------------------------|---|---------------------------------------------------------|-----------------------------|--------------------------------------------|--------------------------------------------|---|------------------------|
| Series<br>A: Arc series<br>C: Circle series<br>S: Square series<br>W: Wave series<br>T: Triangle series<br>H: Hexagon series<br>D: Diamond series |   | Type<br>R: Right angle<br>C: Curve angle | Installation<br>E: Recessed<br>S: Ceiling/Pendant | Size<br>3535:<br>35mm: Luminous surface width<br>35mm: Lamp height | Optical Type<br>D: Diffuser<br>P: Prismatic | Length<br>0600: 600mm | Version<br>(R): Regular<br>(H): High-efficiency |   | Dimming Method<br>N: Non-dimming<br>D: 1-10V<br>A: DALI | CRI<br>8: Ra>80<br>9: Ra>90 | CCT<br>27: 2700K<br>30: 3000K<br>40: 4000K | Color<br>B: Black<br>W: White<br>S: Silver |   | Type power<br>072: 72W |

## Attentions

1. Non-professionals are prohibited from installing, disassembling and repairing the product.
2. Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
3. Please use professional cutting tools when cutting
4. Do not use any acid or alkaline adhesive to fix products
5. The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
6. PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use