

Infinite System Specification


— Net Shape




MS3535D-NX
MS5035D-NX
MS7035D-NX
MS3535P-NX
MS5035P-NX
MS7035P-NX




Optical: Diffuser

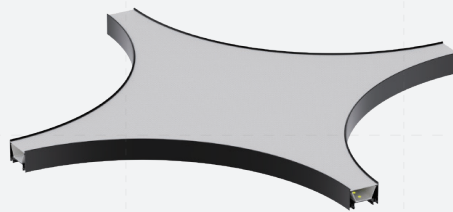


Optical: Prismatic



Model:
MS3535D-NX
MS3535P-NX



Model:
MS5035D-NX
MS5035P-NX



Model:
MS7035D-NX
MS7035P-NX

© Basic Information

Light efficiency

MS3535D-NX 100LM/W(Regular), 120LM/W(High-Efficiency)	MS3535P-NX 85LM/W(Regular), 105LM/W(High-Efficiency)
MS5035D-NX 100LM/W(Regular), 120LM/W(High-Efficiency)	MS5035P-NX 90LM/W(Regular), 105LM/W(High-Efficiency)
MS7035D-NX 110LM/W(Regular), 135LM/W(High-Efficiency)	MS7035P-NX 100LM/W(Regular), 120LM/W(High-Efficiency)


Diameter

MS3535D-NX/MS3535P-NX/MS5035D-NX/MS5035P-NX D600/800/1200 mm	MS7035D-NX/MS7035P-NX D800/1200 mm
--	--


Common information

· Material:	AL6063-T5, spraying surface
· Color:	Black/White/Silver/Orange/Blue/Green /Rose gold/Champagne gold
· Angle:	90°
· IP grade:	IP20
· CCT:	2700/3000/3500/4000/5000/6500K optional
· CRI:	>80/>90
· SDCM:	≤3 Step
· Dimming method:	Non-dimming, 1-10V, DALI2+PUSH
· Application:	Indoor
· Installation:	Ceiling/Pendant
· Certification:	CE, UKCA, ROHS, REACH, CB, ENEC, ETL, LM-80
· Warranty:	5 years


© Product Dimension Information

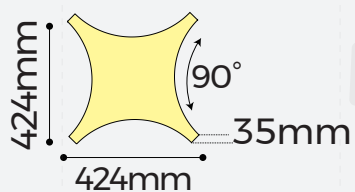


Suitable for curve modules: D600




*Suitable for curve modules: D800




*Suitable for curve modules: D1200

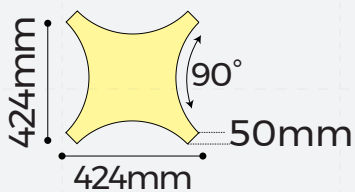


Suitable for curve modules: D600




*Suitable for curve modules: D800



*Suitable for curve modules: D1200



*Suitable for curve modules: D800



*Suitable for curve modules: D1200

*The yellow fill means luminous surface.

© Luminaire Parameters

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
MS3535D-NX	Regular	D600 [1.97ft]	90°	53	DC36V	1.35	>80	5337	2700K 3000K 3500K 4000K 5000K 6500K
							>90	4590	
		D800 [2.62ft]	90°	95	DC36V	2.4	>80	9488	
							>90	8160	
		D1200 [3.93ft]	90°	206	DC36V	5.2	>80	20558	
							>90	17680	
	High-Efficiency	D600 [1.97ft]	90°	53	DC36V	1.35	>80	6405	
							>90	5508	
		D800 [2.62ft]	90°	95	DC36V	2.4	>80	11386	
							>90	9792	
		D1200 [3.93ft]	90°	206	DC36V	5.2	>80	24670	
							>90	21216	
MS3535P-NX	Regular	D600 [1.97ft]	90°	53	DC36V	1.35	>80	4537	2700K 3000K 3500K 4000K 5000K 6500K
							>90	3902	
		D800 [2.62ft]	90°	95	DC36V	2.4	>80	8065	
							>90	6936	
		D1200 [3.93ft]	90°	206	DC36V	5.2	>80	17474	
							>90	15028	
	High-Efficiency	D600 [1.97ft]	90°	53	DC36V	1.35	>80	5604	
							>90	4820	
		D800 [2.62ft]	90°	95	DC36V	2.4	>80	9963	
							>90	8568	
		D1200 [3.93ft]	90°	206	DC36V	5.2	>80	21586	
							>90	18564	

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
MS5035D-NX	Regular	D600 [1.97ft]	90°	75	DC36V	1.9	>80	7512	2700K 3000K 3500K 4000K 5000K 6500K
							>90	6460	
		D800 [2.62ft]	90°	127	DC36V	3.2	>80	12651	
							>90	10880	
		D1200 [3.93ft]	90°	253	DC36V	6.4	>80	25302	
							>90	21760	
	High-Efficiency	D600 [1.97ft]	90°	75	DC36V	1.9	>80	9014	
							>90	7752	
		D800 [2.62ft]	90°	127	DC36V	3.2	>80	15181	
							>90	13056	
		D1200 [3.93ft]	90°	253	DC36V	6.4	>80	30363	
							>90	26112	
MS5035P-NX	Regular	D600 [1.97ft]	90°	75	DC36V	1.9	>80	6760	
							>90	5814	
		D800 [2.62ft]	90°	127	DC36V	3.2	>80	11386	
							>90	9792	
		D1200 [3.93ft]	90°	253	DC36V	6.4	>80	22772	
							>90	19584	
	High-Efficiency	D600 [1.97ft]	90°	75	DC36V	1.9	>80	7887	
							>90	6783	
		D800 [2.62ft]	90°	127	DC36V	3.2	>80	13284	
							>90	11424	
		D1200 [3.93ft]	90°	253	DC36V	6.4	>80	26567	
							>90	22848	

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
MS7035D-NX	Regular	D800 [2.62ft]	90°	95	DC36V	2.4	>80	10437	2700K 3000K 3500K 4000K 5000K 6500K
							>90	8976	
		D1200 [3.93ft]	90°	190	DC36V	4.8	>80	20874	
							>90	17952	
	High-Efficiency	D800 [2.62ft]	90°	95	DC36V	2.4	>80	12809	
							>90	11016	
MS7035P-NX	Regular	D800 [2.62ft]	90°	95	DC36V	2.4	>80	9488	
							>90	8160	
		D1200 [3.93ft]	90°	190	DC36V	4.8	>80	18977	
							>90	16320	
	High-Efficiency	D800 [2.62ft]	90°	95	DC36V	2.4	>80	11386	
							>90	9792	
		D1200 [3.93ft]	90°	190	DC36V	4.8	>80	22772	
							>90	19584	
							>80		
							>90		


Note:

1. The output data is based on white coated luminaire with Ra80,4000K.
2. The above Lumens data are at 4000K color temperature.
3. High-efficiency version does not do 3500K and 5000K.
4. The tolerance of output data can be vary up to 15%.
5. The type power is with the power supply, the input current is the current of the light source.
6. The output data is typical value.
7. The following is an example of lumen conversion instructions:


CCT	RA	Ratio of lumens (white coated luminaire)	Ratio of lumens (Other coated colors of luminaire)
2700K	80	90%	Calculate white coated luminaire lumens first, then multiply by 90 %
	90	77%	
3000K	80	93%	
	90	80%	
3500K	80	97%	
	90	83%	
4000K	80	100%	
	90	86%	
5000K	80	100%	
	90	86%	
6500K	80	100%	
	90	86%	
Note: All other lumens are to be based on white coated luminaire with 4000K,RA80(100%);and multiplied by the percentage in the table above.			
Assuming a 4000K, RA80 white coated luminaire with 1000lm lumens:			
Example 1: If you need 4000K,RA90 lumens (white coated luminaire)			1000*86%=860lm
Example 2: If you need 4000K,RA90 lumens (other coated colors of luminaire)			1000*86%*90%=774lm
Example 3: If you need 3000K,RA80 lumens (white coated luminaire)			1000*93%=930lm
Example 4: If you need 3000K,RA90 lumens (white coated luminaire)			1000*80%=800lm
Example 5: If you need 5000K,RA80 lumens (white coated luminaire)			1000*100%=1000lm

© Optical Parameter

【MS3535D-NX】

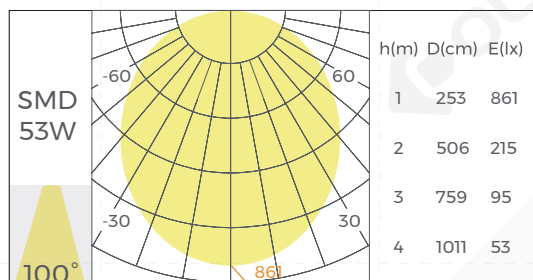


Regular version

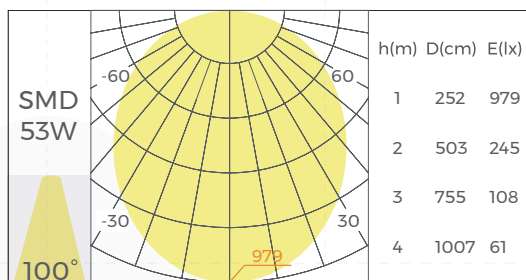


High-efficiency version

*The above data is based on a D600mm diameter module with Ra80,4000K.

【MS3535P-NX】

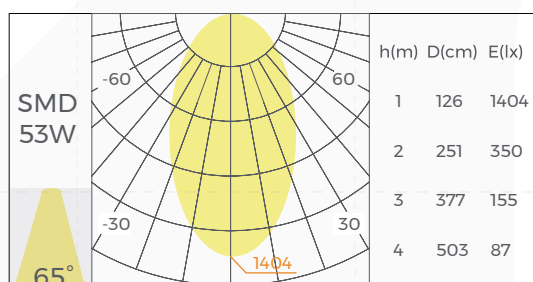


Regular version

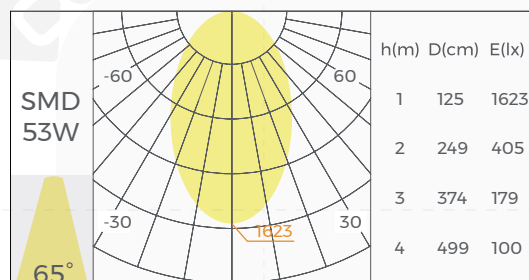


High-efficiency version

*The above data is based on a D600mm diameter module with Ra80,4000K.

【MS5035D-NX】

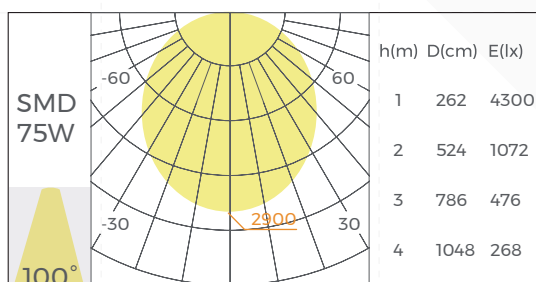


Regular version

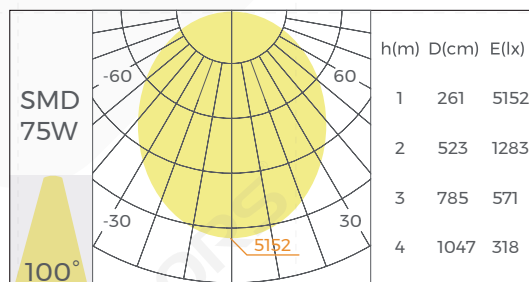


High-efficiency version

*The above data is based on a D600mm diameter module with Ra80,4000K.

【MS5035P-NX】

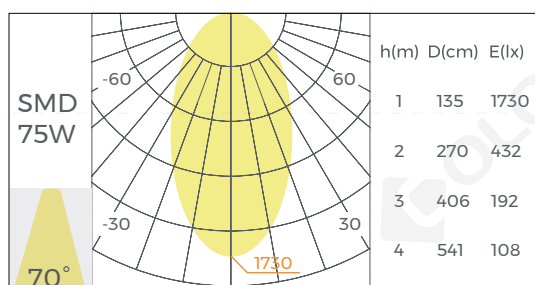


Regular version

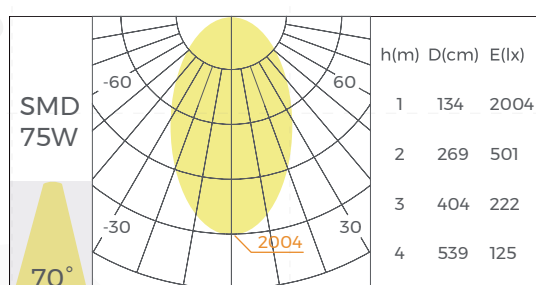


High-efficiency version

*The above data is based on a D600mm diameter module with Ra80,4000K.

【MS7035D-NX】

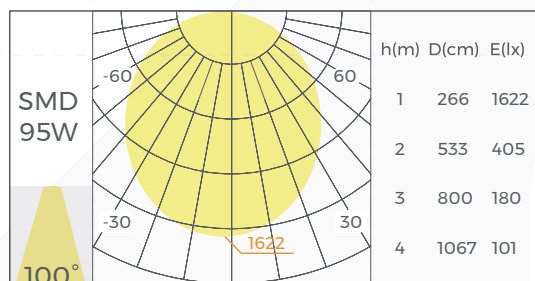


Regular version

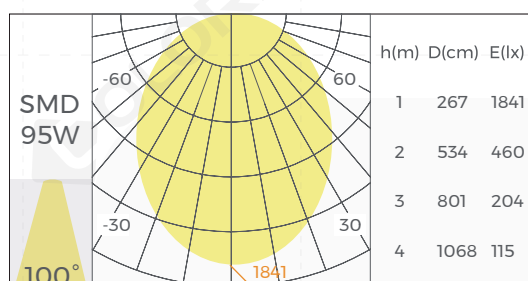


High-efficiency version

*The above data is based on a D800mm diameter module with Ra80,4000K.

【MS7035P-NX】

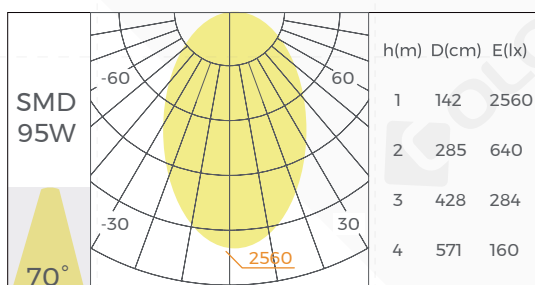

Regular version

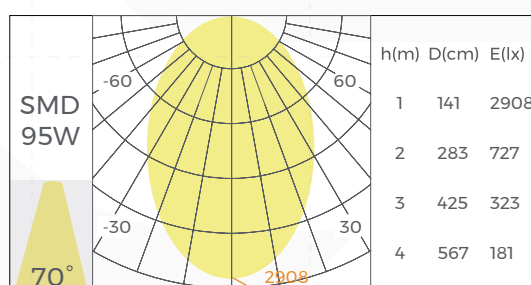

High-efficiency version


*The above data is based on a D800mm diameter module with Ra80,4000K.

Note:




1. The above optical parameters refer to the Line series; only the light-emitting angle can be used as a reference.
2. For specific luminous effects, please use the report input DIALux software in the test report.

© Common Accessories

Power supply

Picture	Dimming Method	Model	Input Voltage	Output Voltage	Output Current	Size(mm)	Certification
	NO/OFF	LF-GMR020YS0350H(S)	AC220 ~240V 50/60Hz	20-56V	0.2-0.35A	168*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GMR040YS0700H(S)		20-56V	0.35-0.7A	210*30*21	
		LF-GMR040YS1050H(S)		20-38V	0.7-1.05A	210*30*21	
		LF-GMR060YS1550H(S)		20-39V	1.2-1.55A	280*30*21	
		LF-GMR060YS II		33-42V	1.15A	245*30*21	
		LF-GMR080YS II		33-42V	1.6/1.7/1.8 /1.9/2A	245*30*21	
	0-10V	LF-GLD025YE	AC220 ~240V 50/60Hz	25-42V	0.3/0.35/0.4 /0.45/0.5/0.55A	245*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GLD035YE		25-42V	0.6/0.65/0.7 /0.75/0.8A	245*30*21	
		LF-GLD045YE		25-42V	0.85/0.9/1 /1.05A	245*30*21	
		LF-GLD055YE		25-42V	1.1/1.15/1.2 /1.3A	285*30*21	
		LF-GLD065YE		25-42V	1.35/1.4/1.5 /1.55A	285*30*21	
		LF-GLD080YE		25-40V	1.6/1.7/1.8/1.9/2A	355*30*21	
	DALI	LF-GSD020YE	AC220 ~240V 50/60Hz	25-42V	0.25-0.5A (50mA)	245*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GSD030YE		25-42V	0.55-0.75A (50mA)	245*30*21	
		LF-GSD040YE		25-42V	0.8-1.05A (50mA)	245*30*21	
		LF-GSD060YE		25-42V	1.1-1.5A (50mA)	285*30*21	
		LF-GSD080YE		25-42V	1.55-2.0A (50mA)	355*30*21	

Installation accessories

Picture	Name	Model	Description
	Ceiling	CL-28	2 pcs/set
	Pendant cable	PN-D	Steel Wire Rope: 2M Maximum weight capacity: 17.5Kg 2 pcs/set
	Pendant rod	PG-I	Rod Size: 1-2 meter adjustable
	Ceiling plate (Incl. wire)	PN-P	Ceiling Plate: D88*29mm Open hole: D75mm Maximum current capacity: 4A Maximum weight capacity: 3Kg Wire Size: D3*2000mm Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 pendant input line
	Ceiling plate (Incl. rod&wire)	PG-P	Ceiling Plate: D88*29mm Open hole: D75mm Maximum current capacity: 4A Maximum weight capacity: 3Kg Rod Size: 1-2 meter adjustable Wire Size: D3*2000mm Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 pendant input line
	Linear power Box (Incl. wire)	PB-07	Power Box: L400*W55*H50mm Maximum current capacity: 4A Maximum weight capacity: 8Kg Wire Size: D3*2000mm Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 pendant input line
	Linear power box (Incl. rod&wire)	PB-08	Power Box: L400*W55*H50mm Maximum current capacity: 4A Rod Size: 1-2 meter adjustable Wire Size: D3*2000mm Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 pendant input line
	Input line	CM-24	Wire Size: D3*2000mm Maximum current capacity: 4A Maximum weight capacity: 8Kg Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 ceiling and MS3535/MS5035/MS7035 recessed input line
	End Caps	EC-MS3535	Material:AL6063-T5 Size:L35*W35*H2.5mm
	End Caps	EC-MS5035	Material:AL6063-T5 Size:L50*W35*H2.5mm

Picture	Name	Model	Description
	End Caps	EC-MS7035	Material:AL6063-T5 Size:L70*W35*H2.5mm
	Pendant cilps	CP-53	Material:SUS304 Size:L22.67*W20*H5.3mm Suitable for MS3535/MS3570 Pendant clips
	Pendant cilps	CP-54	Material:SUS304 Size:L37.87*W20*H5.4mm Suitable for MS5035/MS5070 Pendant clips
	Pendant cilps	CP-55	Material:SUS304 Size:L57.87*W20*H5.4mm Suitable for MS7035/MS7070 Pendant clips

Note:

1. The modules are manufactured with splicing accessories and terminals.
2. All standard modules can only use the power supply external solution, the above installation accessories for power supply external.


Non-Directional Terminal Design

Non-directional terminal design that simplifies and enhances the efficiency of electrical connections between modules.

② Select Power Supply

Drive
Output: 2A & 1.5A

③ Power Taking & Wiring Diagram

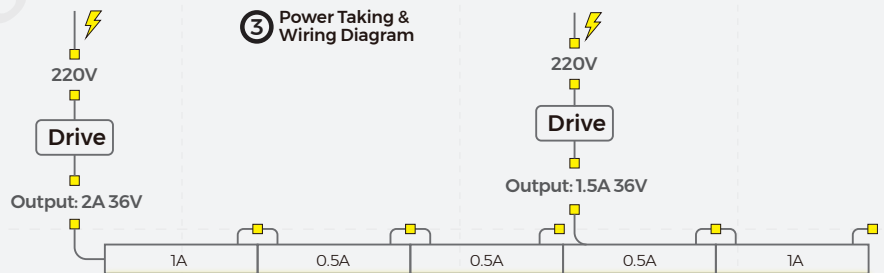

MAX CURRENT: 2A

The total current of the design should be consistent with the output current of the power supply

AC 220V



Non-directional

Note:

1. The above electrical connection modeling is a 35mm luminaire height demonstration only to show the non-directional terminal design.
2. The above graphic explains how to select the right power supply by calculating the current

◎Packing

Model	Quantity (PCS/carton)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
MS3535DD0600NX90(R) -X840W053	6	9.12	13.56	980*500*260 [38.58"*19.68"*10.23"]
MS3535DD0800NX90(R) -X840W095	6	15.24	19.08	650*650*500 [25.59"*25.59"*19.68"]
MS3535DD1200NX90(R) -X840W206	4	17.72	20.88	920*920*340 [36.22"*36.22"*13.38"]
MS5035DD0600NX90(R) -X840W075	6	10.20	14.94	980*500*260 [38.58"*19.68"*10.23"]
MS5035DD0800NX90(R) -X840W127	6	16.32	20.28	650*650*500 [25.59"*25.59"*19.68"]
MS5035DD1200NX90(R) -X840W253	4	18.32	21.44	920*920*340 [36.22"*36.22"*13.38"]
MS7035DD0800NX90(R) -X840W095	6	16.98	21.12	650*650*500 [25.59"*25.59"*19.68"]
MS7035DD1200NX90(R) -X840W190	4	18.72	22.32	920*920*340 [36.22"*36.22"*13.38"]

Note:

1. Modules packaged without inner box, directly use the outer box.
2. Use one outer box for each module, and then use the wrap and corner protectors to tie them together according to the quantity of carton above.
3. The above weight data is for reference, the exact data should be based on the weight of the physical weighing shall prevail.

◎Model Code

M	S	3535	D	D0600	NX90	(R)	-	X	8	40	B	-	053
 Type M: Module	 Installation E: Recessed S: Ceiling/Pendant	 Size 3535 35mm: Surface width of module 35mm: Height of module	 Optical Type D: Diffuser P: Prismatic	 Diameter D0600: 600mm	 Corner Angle NX90: NX shape, 90°	 Version (R): Regular (H): High-efficiency		 Dimming Method X: No power N: Non-dimming D: 1-10V A: DALI	 CRI 8: Ra>80 9: Ra>90	 CCT 27: 2700K 30: 3000K 40: 4000K	 Color B: Black W: White S: Silver		 Type power 053: 53W

◎Attentions

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting
- 4、 Do not use any acid or alkaline adhesive to fix products
- 5、 The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
- 6、 PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use