

Infinite System Specification

— Triangle series



T-CS3570D


T-CS5070D

T-CS7070D


T-CS3570P

T-CS5070P


T-CS7070P

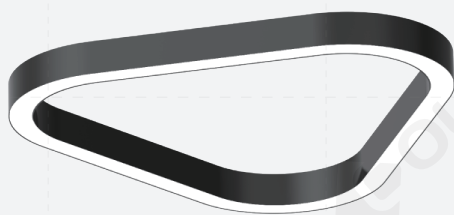


Optical: Diffuser

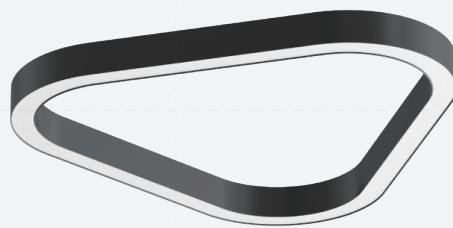


Optical: Prismatic



Model:
T-CS3570D
T-CS3570P



Model:
T-CS5070D
T-CS5070P



Model:
T-CS7070D
T-CS7070P

© Basic Information

Light efficiency

T-CS3570D 100LM/W(Regular), 120LM/W(High-Efficiency)	T-CS3570P 85LM/W(Regular), 105LM/W(High-Efficiency)
T-CS5070D 100LM/W(Regular), 120LM/W(High-Efficiency)	T-CS5070P 90LM/W(Regular), 105LM/W(High-Efficiency)
T-CS7070D 110LM/W(Regular), 135LM/W(High-Efficiency)	T-CS7070P 100LM/W(Regular), 120LM/W(High-Efficiency)


Side length


T-CS3570D/T-CS3570P/T-CS5070D/T-CS5070P 750/900/1200/1500/1800/2400mm	T-CS7070D/T-CS7070P 900/1200/1500/1800/2400mm
---	---

Common information


· Material:	AL6063-T5, spraying surface
· Color:	Black/White/Silver/Orange/Blue/Green /Rose gold/Champagne gold
· IP grade:	IP20
· CCT:	2700/3000/3500/4000/5000/6500K optional
· CRI:	>80/>90
· SDCM:	≤3 Step
· Dimming method:	Non-dimming, 1-10V, DALI2+PUSH
· Application:	Indoor
· Installation:	Ceiling/Pendant
· Certification:	CE, UKCA, ROHS, REACH, CB, ENEC, ETL, LM-80
· Warranty:	5 years

© Product Dimension Information

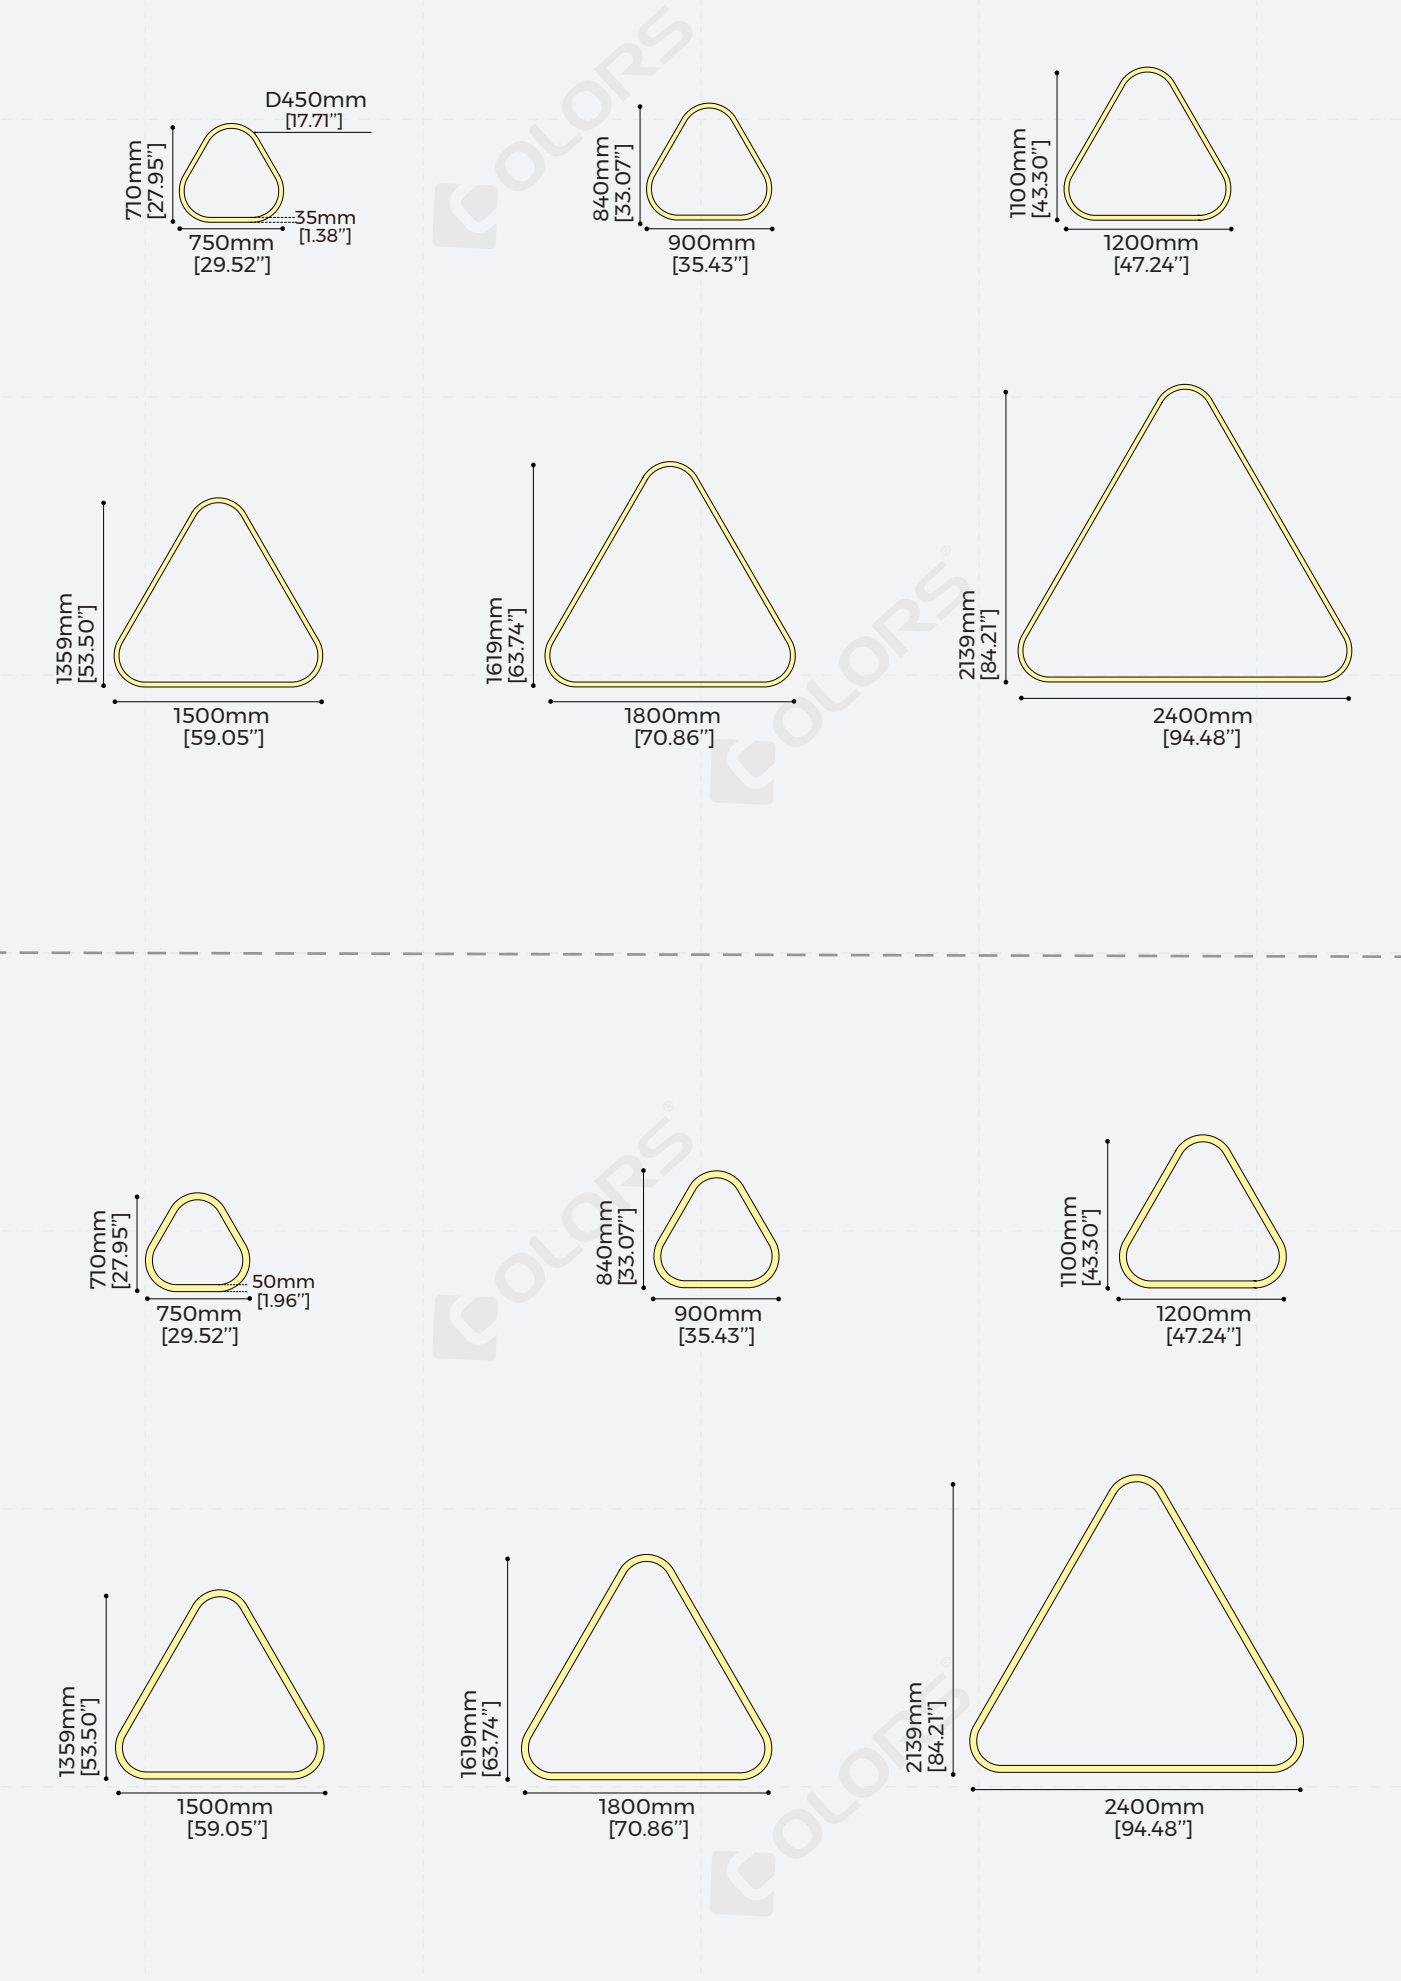

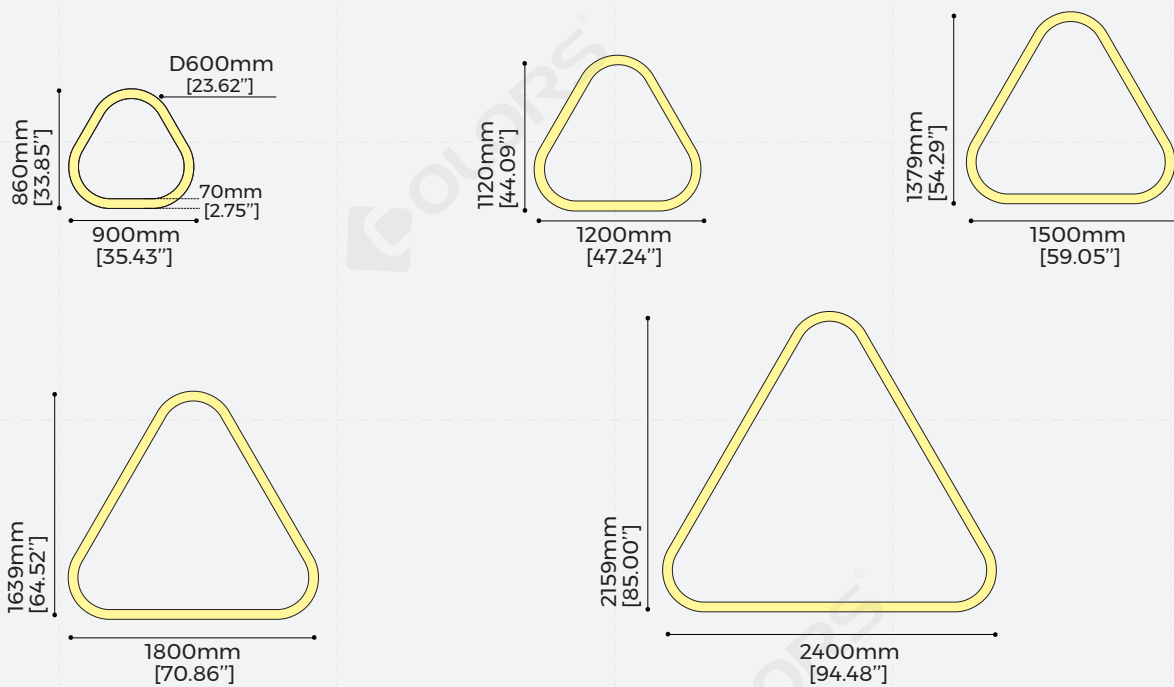

Case 1: For length of sides $\leq 1.2\text{m}$, the lamp is to be produced as complete unit.

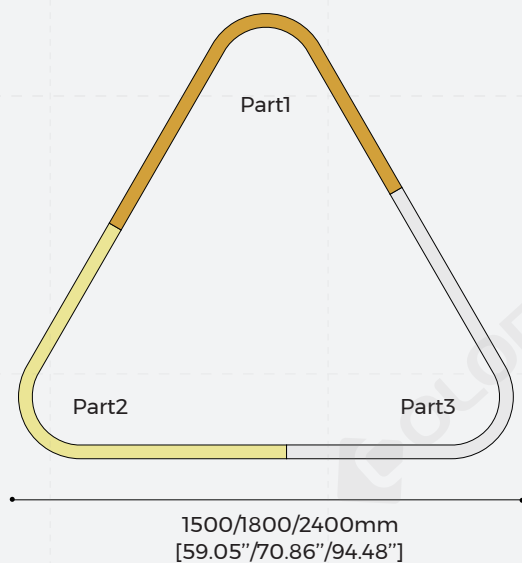

Case 2: For length of side $> 1.2\text{m}$, the lamp is to be divided into parts

© Luminaire Parameters

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS3570D	Regular	750 [2.46ft]	44	AC200-240V	220	>80	4400	2700K 3000K 3500K 4000K 5000K 6500K
						>90	3784	
		900 [2.95ft]	54	AC200-240V	270	>80	5400	
						>90	4644	
		1200 [3.94ft]	72	AC200-240V	360	>80	7200	
						>90	6192	
		1500 [4.92ft]	78	AC200-240V	390	>80	7800	
						>90	6708	
		1800 [5.91ft]	108	AC200-240V	550	>80	10800	
						>90	9288	
		2400 [7.87ft]	144	AC200-240V	730	>80	14400	
						>90	12384	
	High-Efficiency	750 [2.46ft]	44	AC200-240V	220	>80	5280	
						>90	4541	
		900 [2.95ft]	54	AC200-240V	270	>80	6480	
						>90	5573	
		1200 [3.94ft]	72	AC200-240V	360	>80	8640	
						>90	7430	
		1500 [4.92ft]	78	AC200-240V	390	>80	9360	
						>90	8050	
		1800 [5.91ft]	108	AC200-240V	550	>80	12960	
						>90	11146	
		2400 [7.87ft]	144	AC200-240V	730	>80	17280	
						>90	14861	

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS3570P	Regular	750 [2.46ft]	44	AC200-240V	220	>80	3740	2700K 3000K 3500K 4000K 5000K 6500K
						>90	3216	
		900 [2.95ft]	54	AC200-240V	270	>80	4590	
						>90	3947	
		1200 [3.94ft]	72	AC200-240V	360	>80	6120	
						>90	5263	
		1500 [4.92ft]	78	AC200-240V	390	>80	6630	
						>90	5702	
		1800 [5.91ft]	108	AC200-240V	550	>80	9180	
						>90	7895	
		2400 [7.87ft]	144	AC200-240V	730	>80	12240	
						>90	10526	
	High-Efficiency	750 [2.46ft]	44	AC200-240V	220	>80	4620	
						>90	3973	
		900 [2.95ft]	54	AC200-240V	270	>80	5670	
						>90	4876	
		1200 [3.94ft]	72	AC200-240V	360	>80	7560	
						>90	6502	
		1500 [4.92ft]	78	AC200-240V	390	>80	8190	
						>90	7043	
		1800 [5.91ft]	108	AC200-240V	550	>80	11340	
						>90	9752	
		2400 [7.87ft]	144	AC200-240V	730	>80	15120	
						>90	13003	

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS5070D	Regular	750 [2.46ft]	56	AC200-240V	280	>80	5600	2700K 3000K 3500K 4000K 5000K 6500K
						>90	4816	
		900 [2.95ft]	66	AC200-240V	330	>80	6600	
						>90	5676	
		1200 [3.94ft]	92	AC200-240V	460	>80	9200	
						>90	7912	
		1500 [4.92ft]	115	AC200-240V	580	>80	11500	
						>90	9890	
		1800 [5.91ft]	135	AC200-240V	680	>80	13500	
						>90	11610	
		2400 [7.87ft]	175	AC200-240V	880	>80	17500	
						>90	15050	
	High-Efficiency	750 [2.46ft]	56	AC200-240V	280	>80	6720	
						>90	5779	
		900 [2.95ft]	66	AC200-240V	330	>80	7920	
						>90	6811	
		1200 [3.94ft]	92	AC200-240V	460	>80	11040	
						>90	9494	
		1500 [4.92ft]	115	AC200-240V	580	>80	13800	
						>90	11868	
		1800 [5.91ft]	135	AC200-240V	680	>80	16200	
						>90	13932	
		2400 [7.87ft]	175	AC200-240V	880	>80	21000	
						>90	18060	

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS5070P	Regular	750 [2.46ft]	56	AC200-240V	280	>80	5040	2700K 3000K 3500K 4000K 5000K 6500K
						>90	4334	
		900 [2.95ft]	66	AC200-240V	330	>80	5940	
						>90	5108	
		1200 [3.94ft]	92	AC200-240V	460	>80	8280	
						>90	7121	
		1500 [4.92ft]	115	AC200-240V	580	>80	10350	
						>90	8901	
		1800 [5.91ft]	135	AC200-240V	680	>80	12150	
						>90	10449	
		2400 [7.87ft]	175	AC200-240V	880	>80	15750	
						>90	13545	
	High-Efficiency	750 [2.46ft]	56	AC200-240V	280	>80	5880	
						>90	5057	
		900 [2.95ft]	66	AC200-240V	330	>80	6930	
						>90	5960	
		1200 [3.94ft]	92	AC200-240V	460	>80	9660	
						>90	8308	
		1500 [4.92ft]	115	AC200-240V	580	>80	12075	
						>90	10385	
		1800 [5.91ft]	135	AC200-240V	680	>80	14175	
						>90	12191	
		2400 [7.87ft]	175	AC200-240V	880	>80	18375	
						>90	15803	

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS7070D	Regular	900 [2.95ft]	78	AC200-240V	390	>80	8580	2700K 3000K 3500K 4000K 5000K 6500K
						>90	7379	
		1200 [3.94ft]	116	AC200-240V	590	>80	12760	
						>90	10974	
		1500 [4.92ft]	148	AC200-240V	750	>80	16280	
						>90	14001	
		1800 [5.91ft]	176	AC200-240V	890	>80	19360	
						>90	16650	
		2400 [7.87ft]	235	AC200-240V	1190	>80	25850	
						>90	22231	
	High-Efficiency	900 [2.95ft]	78	AC200-240V	390	>80	10530	
						>90	9056	
		1200 [3.94ft]	116	AC200-240V	590	>80	15660	
						>90	13468	
		1500 [4.92ft]	148	AC200-240V	750	>80	19980	
						>90	17183	
		1800 [5.91ft]	176	AC200-240V	890	>80	23760	
						>90	20434	
		2400 [7.87ft]	235	AC200-240V	1190	>80	31725	
						>90	27284	

Model	Version	Length (mm)	Type Power (W/PCS)	Input Voltage (V)	Input Current (mA)	CRI	Lumens (LM/PCS)	CCT
T-CS7070P	Regular	900 [2.95ft]	78	AC200-240V	390	>80	7800	2700K 3000K 3500K 4000K 5000K 6500K
						>90	6708	
		1200 [3.94ft]	116	AC200-240V	590	>80	11600	
						>90	9976	
		1500 [4.92ft]	148	AC200-240V	750	>80	14800	
						>90	12728	
		1800 [5.91ft]	176	AC200-240V	890	>80	17600	
						>90	15136	
		2400 [7.87ft]	235	AC200-240V	1190	>80	23500	
						>90	20210	
	High-Efficiency	900 [2.95ft]	78	AC200-240V	390	>80	9360	
						>90	8050	
		1200 [3.94ft]	116	AC200-240V	590	>80	13920	
						>90	11971	
		1500 [4.92ft]	148	AC200-240V	750	>80	17760	
						>90	15274	
		1800 [5.91ft]	176	AC200-240V	890	>80	21120	
						>90	18163	
		2400 [7.87ft]	235	AC200-240V	1190	>80	28200	
						>90	24252	

Note:

1. The output data is based on white coated luminaire with Ra80,4000K.
2. The above Lumens data are at 4000K color temperature.
3. High-efficiency version does not do 3500K and 5000K
4. The tolerance of output data can be vary up to 15%.
5. The output data is typical value.
6. The following is an example of lumen conversion instructions:

CCT	RA	Ratio of lumens (white coated luminaire)	Ratio of lumens (Other coated colors of luminaire)
2700K	80	90%	Calculate white coated luminaire lumens first, then multiply by 90 %
	90	77%	
3000K	80	93%	
	90	80%	
3500K	80	97%	
	90	83%	
4000K	80	100%	
	90	86%	
5000K	80	100%	
	90	86%	
6500K	80	100%	
	90	86%	


Note: All other lumens are to be based on white coated luminaire with 4000K, RA80(100%); and multiplied by the percentage in the table above.

Assuming a 4000K, RA80 white coated luminaire with 1000lm lumens:


Example 1: If you need 4000K, RA90 lumens (white coated luminaire)	$1000 \times 86\% = 860\text{lm}$
Example 2: If you need 4000K, RA90 lumens (other coated colors of luminaire)	$1000 \times 86\% \times 90\% = 774\text{lm}$
Example 3: If you need 3000K, RA80 lumens (white coated luminaire)	$1000 \times 93\% = 930\text{lm}$
Example 4: If you need 3000K, RA90 lumens (white coated luminaire)	$1000 \times 80\% = 800\text{lm}$
Example 5: If you need 5000K, RA80 lumens (white coated luminaire)	$1000 \times 100\% = 1000\text{lm}$

© Optical Parameter

【T-CS3570D】

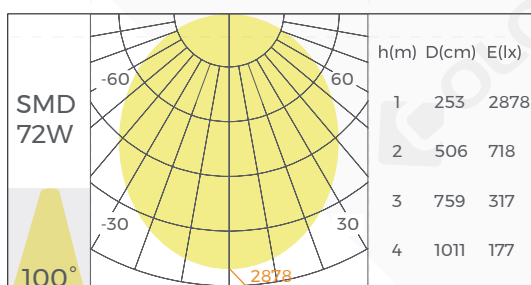


Regular version

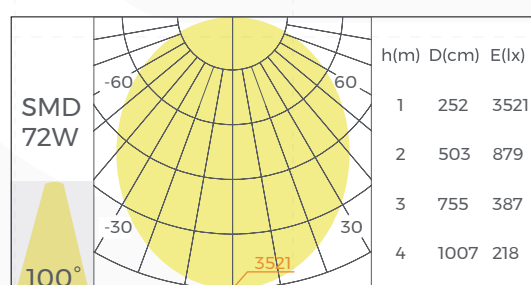


High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

【T-CS3570P】

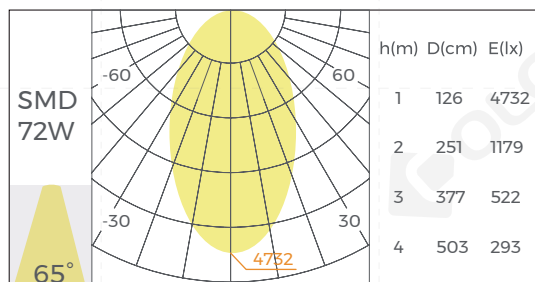


Regular version

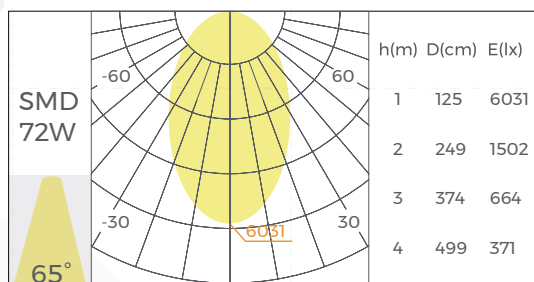


High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

【T-CS5070D】

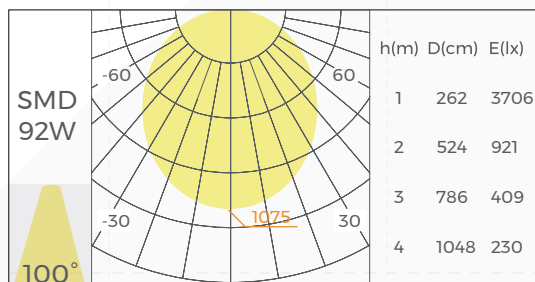


Regular version

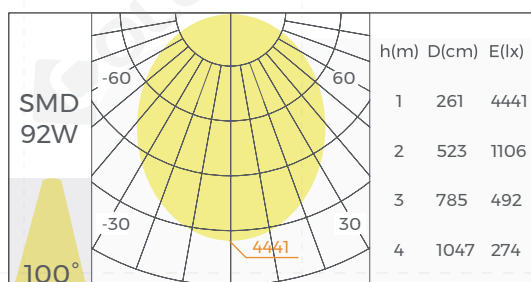


High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

【T-CS5070P】

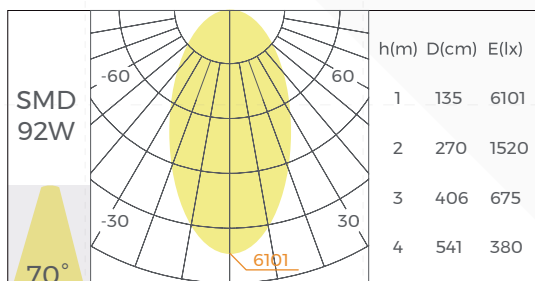


Regular version

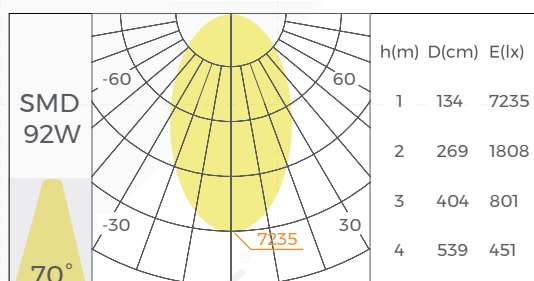


High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

【T-CS7070D】

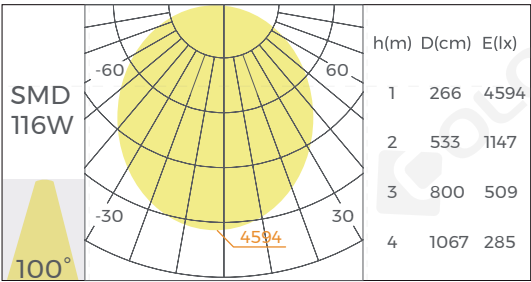


Regular version

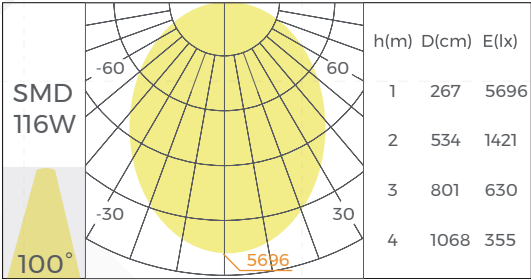


High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

【T-CS7070P】

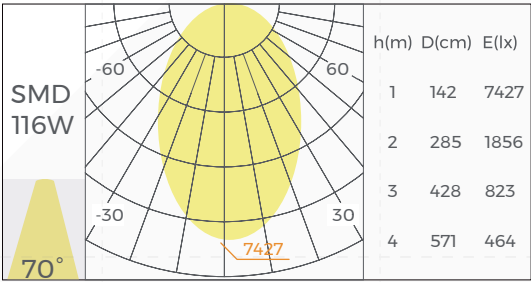

Regular version

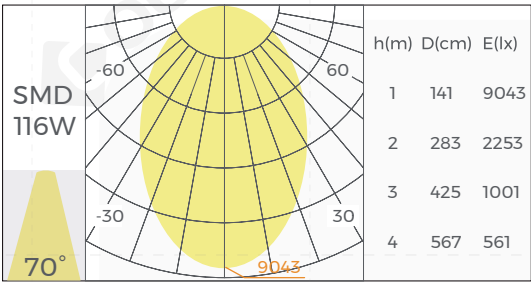

High-efficiency version

*The above data is based on a 1200mm length luminaire with Ra80,4000K.

◎ Installation


External power supply/Built-in power supply




Ceiling

External power supply


For Model:
T-CS3570D
T-CS3570P



2M

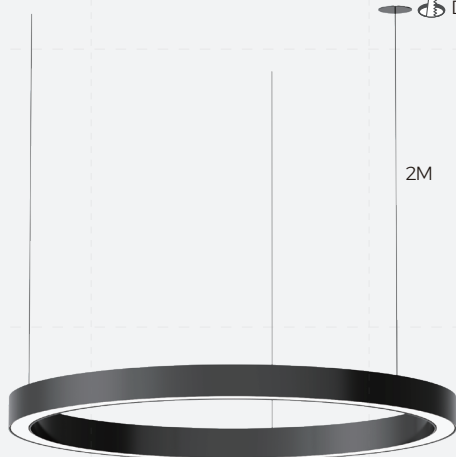

Ceiling plate
(With Steel Wire Rope)




1-2M
Adjustable



Ceiling plate
(With Rod)



2M

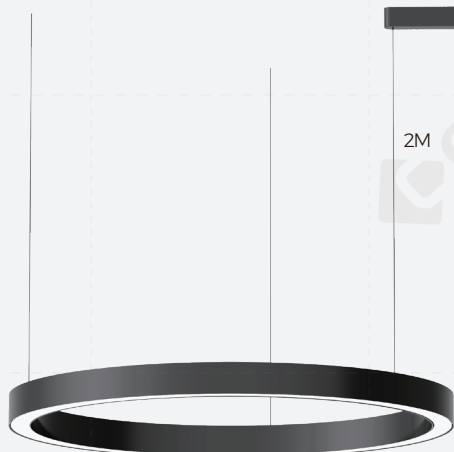

Linear Power Box
(With Steel Wire Rope)



1-2M
Adjustable



Linear Power Box
(With Rod)

Built-in power supply

For Model:
T-CS5070D
T-CS5070P
T-CS7070D
T-CS7070P



Junction Box
(With Steel Wire Rope)



Junction Box
(With Rod)

Note:

1. The above illustration shows the installation method.
2. The above luminaire shapes are for installation illustration only.

◎Packing

Model	Quantity (PCS/carton)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
T-CS3570D0750(R)-N840W044	4	10.05	12.45	820*770*520 [32.28"*30.31"*20.47"]
T-CS3570D0900(R)-N840W054	4	12.10	15.30	970*900*520 [38.18"*35.43"*20.47"]
T-CS3570D1200(R)-N840W072	4	16.20	20.20	1270*1170*520 [50"*46.06"*20.47"]
T-CS3570D1500(R)-N840W078	2	10.15	12.55	970*650*660 [38.18"*25.59"*25.98"]
T-CS3570D1800(R)-N840W108	2	12.21	15.01	1120*740*660 [44.09"*29.13"*25.98"]
T-CS3570D2400(R)-N840W144	2	16.31	19.51	1420*1000*660 [55.90"*39.37"*25.98"]
T-CS5070D0750(R)-N840W056	4	12.34	14.74	820*770*520 [32.28"*30.31"*20.47"]
T-CS5070D0900(R)-N840W066	4	14.86	18.06	970*900*520 [38.18"*35.43"*20.47"]
T-CS5070D1200(R)-N840W092	4	19.90	23.90	1270*1170*520 [50"*46.06"*20.47"]
T-CS5070D1500(R)-N840W115	2	12.47	14.87	970*650*660 [43.30"*25.59"*25.98"]
T-CS5070D1800(R)-N840W135	2	14.99	17.79	1120*740*660 [44.09"*29.13"*25.98"]
T-CS5070D2400(R)-N840W175	2	20.03	23.23	1420*1000*660 [55.90"*39.37"*25.98"]
T-CS7070D0900(R)-N840W078	4	16.98	19.38	970*900*520 [38.18"*35.43"*20.47"]
T-CS7070D1200(R)-N840W116	4	22.74	25.94	1270*1170*520 [50"*46.06"*20.47"]

Model	Quantity (PCS/carton)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
T-CS7070D1500(R)-N840W148	2	14.25	16.25	970*650*660 [43.30"*25.59"*25.98"]
T-CS7070D1800(R)-N840W176	2	17.13	19.93	1120*740*660 [44.09"*29.13"*25.98"]
T-CS7070D2400(R)-N840W235	2	22.89	26.09	1420*1000*660 [55.90"*39.37"*25.98"]

Note:

1. Lamps packaged without inner box, directly use the outer box.
2. Use one outer box for each lamp, and then use the wrap and corner protectors to tie them together according to the quantity of carton above.
3. The above weight data is for reference, the exact data should be based on the weight of the physical weighing shall prevail.

©Model Code

T	-	C	S	3570	D	1200	(R)	-	N	8	40	B	-	072
														
Series A: Arc series C: Circle series S: Square series W: Wave series T: Triangle series H: Hexagon series D: Diamond series		Type R: Right angle C: Curve angle	Installation E: Recessed S: Ceiling/Pendant	Size 3570: 35mm: Luminous surface width 70mm: Lamp height	Optical Type D: Diffuser P: Prismatic	Length 1200: 1200mm	Version (R): Regular (H): High-efficiency		Dimming Method N: Non-dimming D: 1-10V A: DALI	CRI 8: Ra>80 9: Ra>90	CCT 27: 2700K 30: 3000K 40: 4000K	Color B: Black W: White S: Silver		Type power 072: 72W

©Attentions

1. Non-professionals are prohibited from installing, disassembling and repairing the product.
2. Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
3. Please use professional cutting tools when cutting
4. Do not use any acid or alkaline adhesive to fix products
5. The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
6. PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use