



COF Series Specification

CF320


24V-12mm

【General description】

- Light line and dot-free with big emitting angle, 20m long strip driven by one end power supply
- Can be cut to any size, easy installation and maintaining
- 4 optional 2700K/3000K/4000K/6500K
- Life longer than 60000H, Ta: -25~40°C; Tc: 75°C (max)


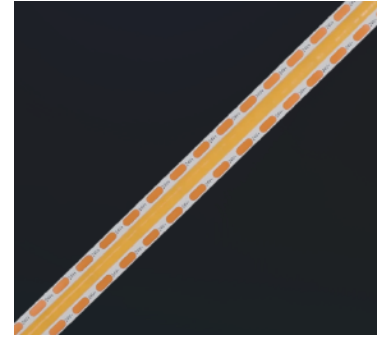


Cutting unit: Free cutting



【Dimension】


- | | |
|--|--|
| Input voltage: DC24V | Max.length: 20000mm(65.6') |
| CRI: 90 | Cutting unit: Free cutting |
| Max.power: 10.6W(1m) | LEDs/m: 320 |
| Power range: 8.6~10.6W(1m) | Min. bend diameter: Φ 60mm(2.36") |
| Rated current: 0.4A(1m) | Mounting: 3M tape |
| Typical Power: 9.6W(1m) | Copper foil: 3oz |
| tape IP: IP20/IP65/IP67 | |
| On-off times: 10000 (test times) | |
| Warranty: 7 years indoors / 5 years outdoors | |




【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	SW	2700K	605	184	63	G
Ra>90	WW	3000K	645	196	67	G
Ra>90	NW	4000K	710	216	74	G
Ra>90	W	6500K	645	196	67	G

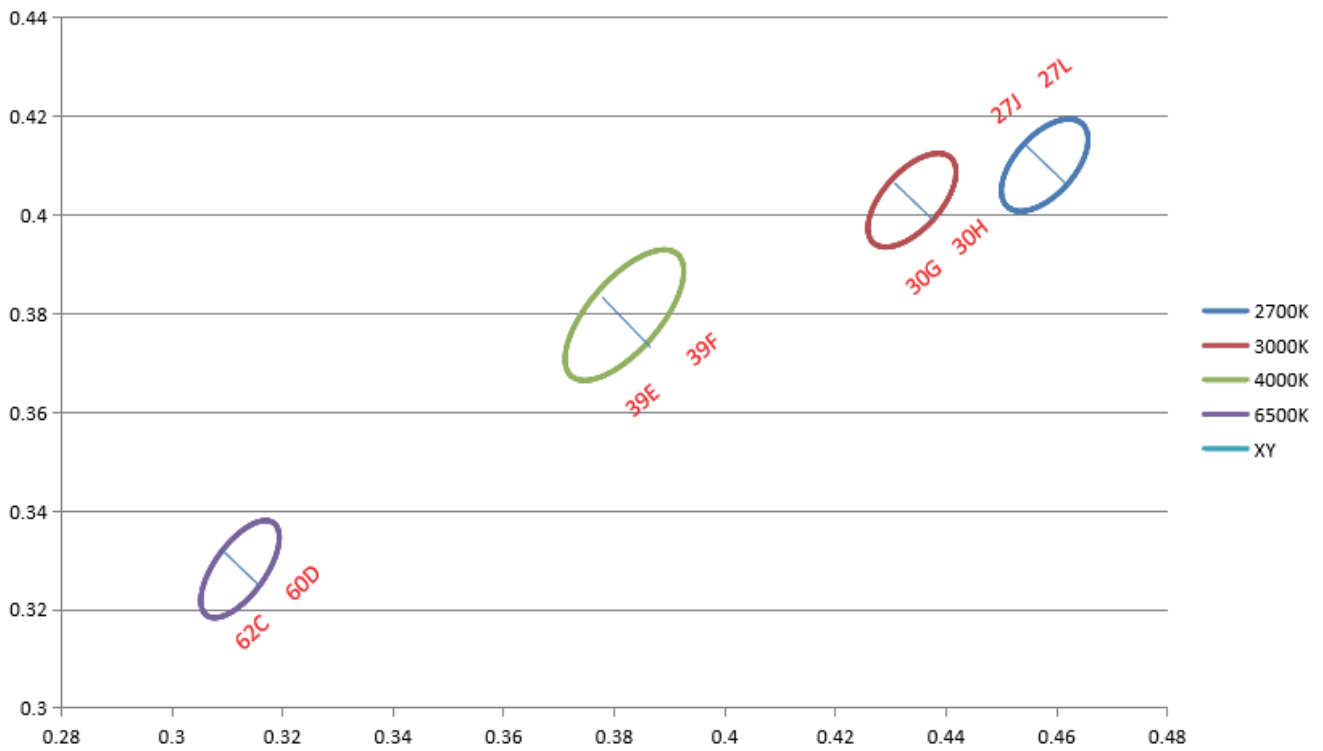


- 1.The tolerance of output data can be vary up to 10%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/Imertex, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.



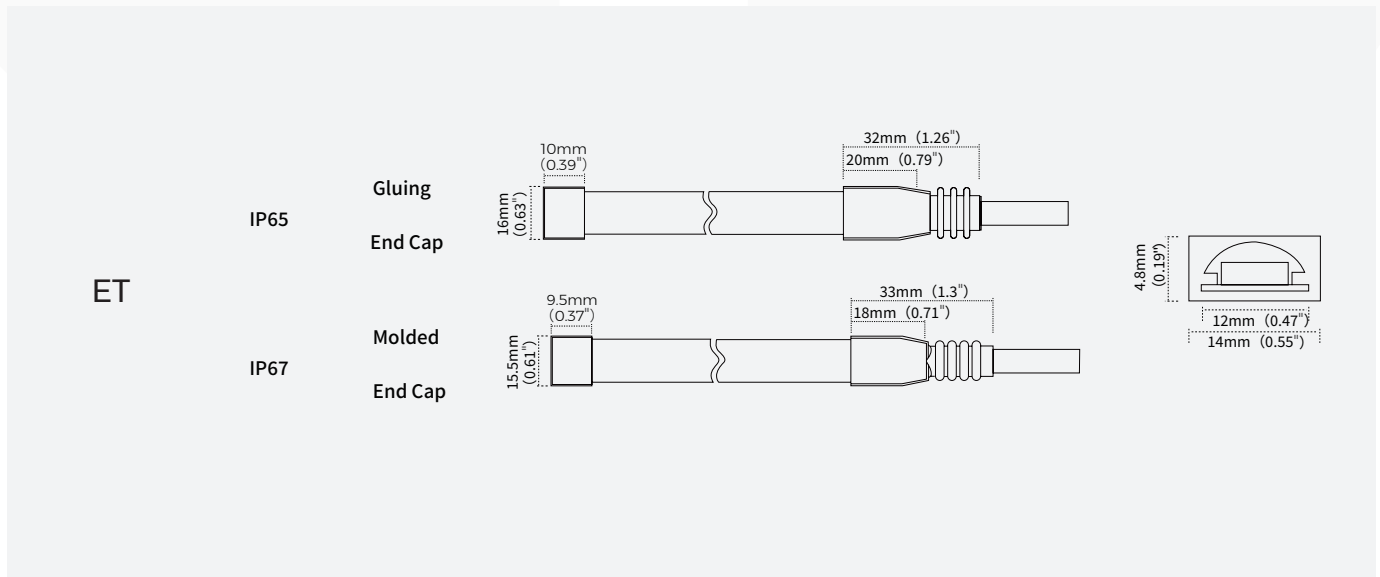






【IP process information】



【Electronic & output data】


IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO	 NO/IP20	No proof	12mm*1.6mm	2700K/3000K/4000K/6500K	100%
NA	 NANO/IP65	Nano-proof	12mm*1.6mm	2700K/3000K/4000K/6500K	98%
ET	 ET/IP67	Extrusion tube	14mm*4.8mm	2700K/3000K/4000K/6500K	88%

【Accessories Information】


Name	Picture	Code	coding	description
Connector for FPC and FPC		/	CBB208-DFTC	8MM-2P solder-free connector (board-to board)\ suitable for bare board 8/10/12mm width strip light
Connector for wire and FPC		/	CXB208-DFTC	8MM-2P solderless connector(wire to board)\ Compatible with 20&22AWG wire\20#(6A);22#(4A)\ Applicable to bare board 10mm width lamp strip
Fixed Clip		94-02-00-0004	FSW12SA	Silicone clip, screw: PA 3*8mm, suitable for 12mm FPC,EF/ET strip
Silicone Plug Kit		94-02-00-0048	DT12EA-A	Silicone plug kit, suitable for 12mm board width, ET/EF series silicone extrusion light strip
Silicone stopper kit		94-02-00-0049	DW12EA-A	Silicone tail plug kit, suitable for 12mm board width, ET/EF series silicone extrusion light strip
Mounting groove		94-02-00-0026	CPT12EA-16100100	Transparent PVC mounting groove,suitable for 12mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	AS-PG-0003	Silicone gel,suitable for ET/EF/EG/ERG waterproof LED strip

【Packing】

Colors brand package(NONA)

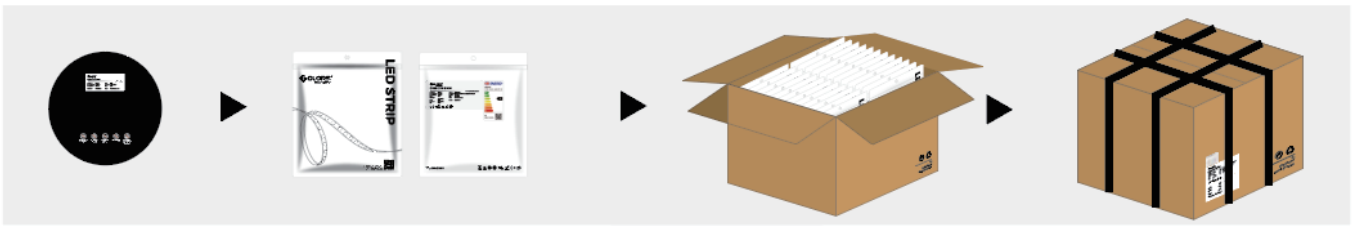

General customized package(ET)

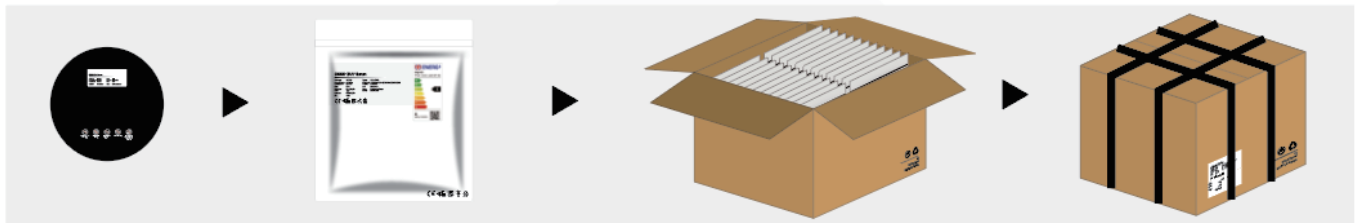

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	20000*12*1.6	20	600	0.44	13.2	16.2	41*41*26
NA	20000*12*1.6	20	600	0.47	14.1	17.1	41*41*26
ET	20000*14*4.8	20	40	1.8	3.6	5.6	25*25*26


Remark: data with 10% tolerance

· Engineering packaging of NO(IP20)/NA(IP65).



· Engineering packaging of ET(IP67)

(free-soldering end caps with 40 cover per box could be ordered separately if needed)

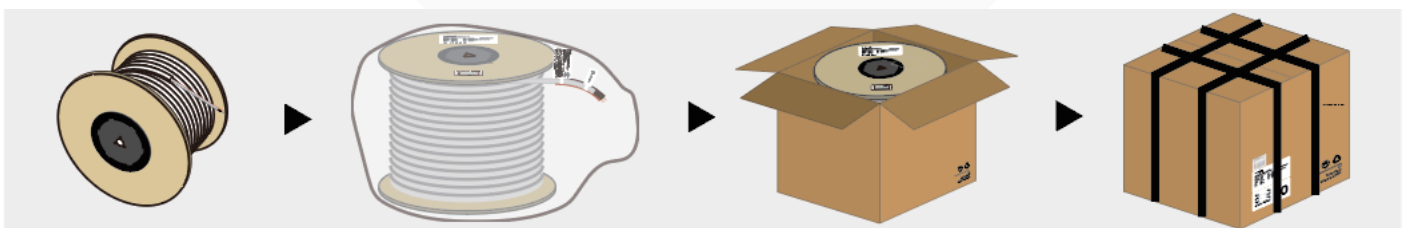

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	50000*12*1.6	50	500	2.1	21	23.5	41*41*26
NA	50000*12*1.6	50	500	2.2	22	24.5	41*41*26
ET	50000*14*4.8	50	100	4.5	9	11	25.5*25.5*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 48VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
 - Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
 - Do not fold it in case any damage of LED beads.
 - Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
 - Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
 - LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃. Storage temperature: 0℃~60℃. Please use the strips without waterproof within indoor environment with humidity less than 70%.
 - Please be careful during operation. Do not touch the AC power supply in case of electric shock.
 - Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
 - Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
 - Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.
- * When using dimmer and dimming power supplies like Triac, etc, conduct compatibility tests on the product, dimmers and power supplies to ensure full compatibility. If any issues arise, contact COLORS for technical support.