

CSP LINEAR Series Specification


DP4RGB

24V-10mm





【General description】

- Linear RGB light bar without light spot, large light-emitting angle
- Widely adapted to various controllers
- High quality FPC, high thermal conductivity 3M glue
- Life longer than 60000H, Ta: -25~40°C; Tc: 75°C (max)
- UL/UACK/CE/ROHS/REACH certification

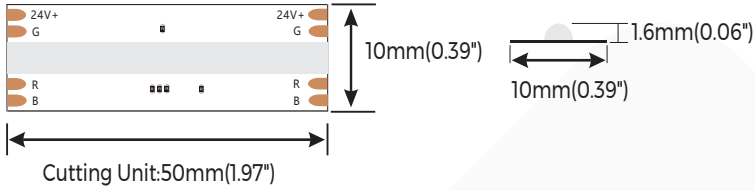

【Dimension】

- | | |
|--|----------------------------------|
| Input voltage: DC24V | Max.length: 5000mm(16.4') |
| CRI: / | Cutting unit: 50mm(1.97") |
| Max.power: 15.8W(1m) | LED pitch: / |
| Power range: 13~15.8W(1m) | Min. bend diameter: Φ60mm(2.36") |
| Rated current: 0.6A(1m) 2.63A(5m) | Mounting: 3M tape |
| Typical Power: 14.4W(1m) 63W(5m) | Copper foil: 2oz |
| IP: IP20/IP65/IP67 | |
| On-off times: 10000 (test times) | |
| Warranty: 5 years indoors / 5 years outdoors | |

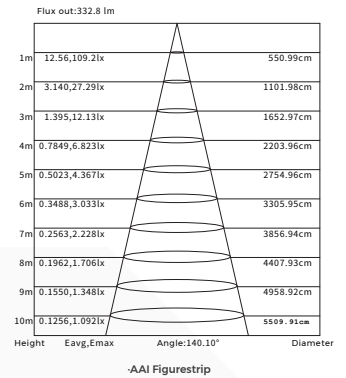


【Photo-electric Parameters】




CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
/	R	620-630nm	180	54	25	/
/	G	520-530nm	550	166	115	/
/	B	460-470nm	40	12	18	/
/	RGB	RGB	805	243	56	/

- 1.The tolerance of output data can be vary up to 10%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/lmerter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

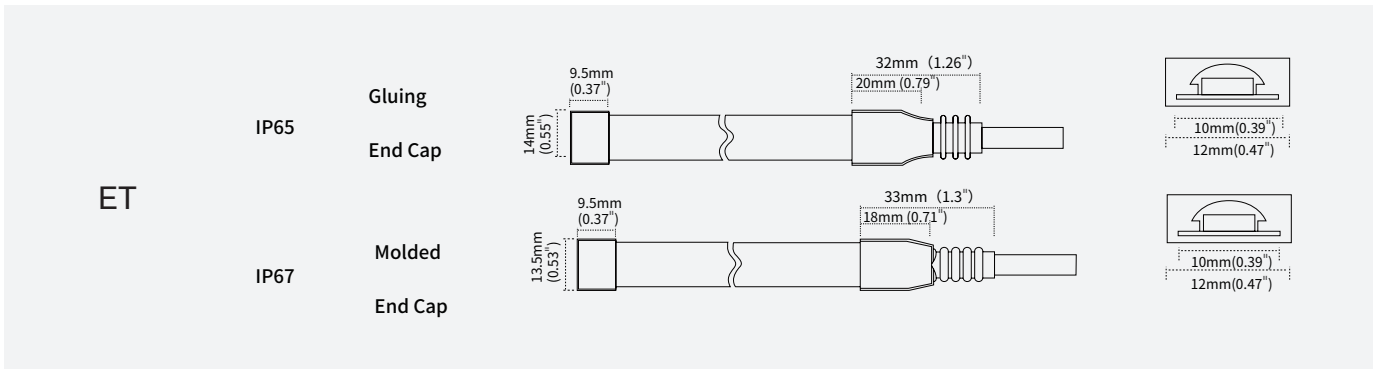






【IP process information】



【Electronic & output data】

IP Process	Picture	Picture description	Size	optional CCT/color for finished product	lumen output rate
NO		No proof	10mm*1.6mm	RGB	100%
NA		Nano-proof	10mm*1.6mm	RGB	98%
ET		Extrusion tube	12mm*4.8mm	RGB	88%

【Accessories Information】


Name	Picture	Code	coding	description
Fixed Clip		94-02-00-0003	FSW10SA	Silicone clip, screw: PA 3*8mm, suitable for 10mm FPC,EF/ET strip
Silicone Plug Kit		94-02-00-0046	DT10EA-A	Silicone plug kit is suitable for 10mm board width, ET/EF series silicone extrusion light strip
Silicone stopper kit		94-02-00-0047	DW10EA-A	Silicone tail plug kit is suitable for 10mm board width, ET/EF series silicone extrusion light strip
Mounting groove		94-02-00-0025	CVT10EA-14100100	Transparent PVC mounting groove,suitable for 10mm FPC,silicone extruded EF/ET strip
Stopper glue		94-16-03010001	AS-PG-0003	Silicone gel,suitable for ET/EF/EG waterproof LED strip
Connector for FPC and FPC		81-01-000002-000044	CBB410-DFTA	10MM-4P solderless connector(board-to-board)\ COB(RGB)\for bare board 10mm width light strip
Connector for wire and FPC		81-01-000002-000045	CXB410-DFTA	10MM-4P solderless connector (wire to board)\ compatible with 22AWG wire \ 22#(4A)\ COB(RGB)\ for bare board 10mm width light strip

[Packing]

Colors brand package



General customized package

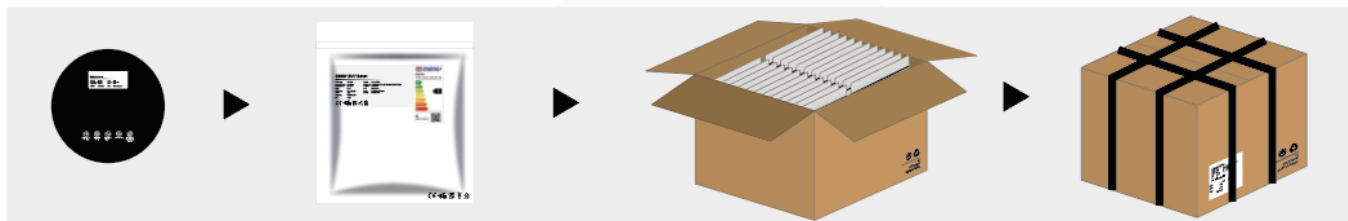

IP Process	Product size(mm)	Product quantity (m/reel)	Product quantity (m/case)	Product net weight(kg)	Net weight per box(kg)	Gross weight(kg)	Package size (cm)
NO	5000*10*1.6	5	270	0.12	6.48	7.56	41*41*26
NA	5000*10*1.6	5	270	0.13	7.02	8.1	41*41*26
ET	5000*12*4.8	5	200	0.4	16	17.08	41*41*26

Remark: data with 10% tolerance

【Precautions】

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25℃~40℃. Storage temperature: 0℃~60℃. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.