


ALS ECO Trimless-Recessed

# BR2013(A)



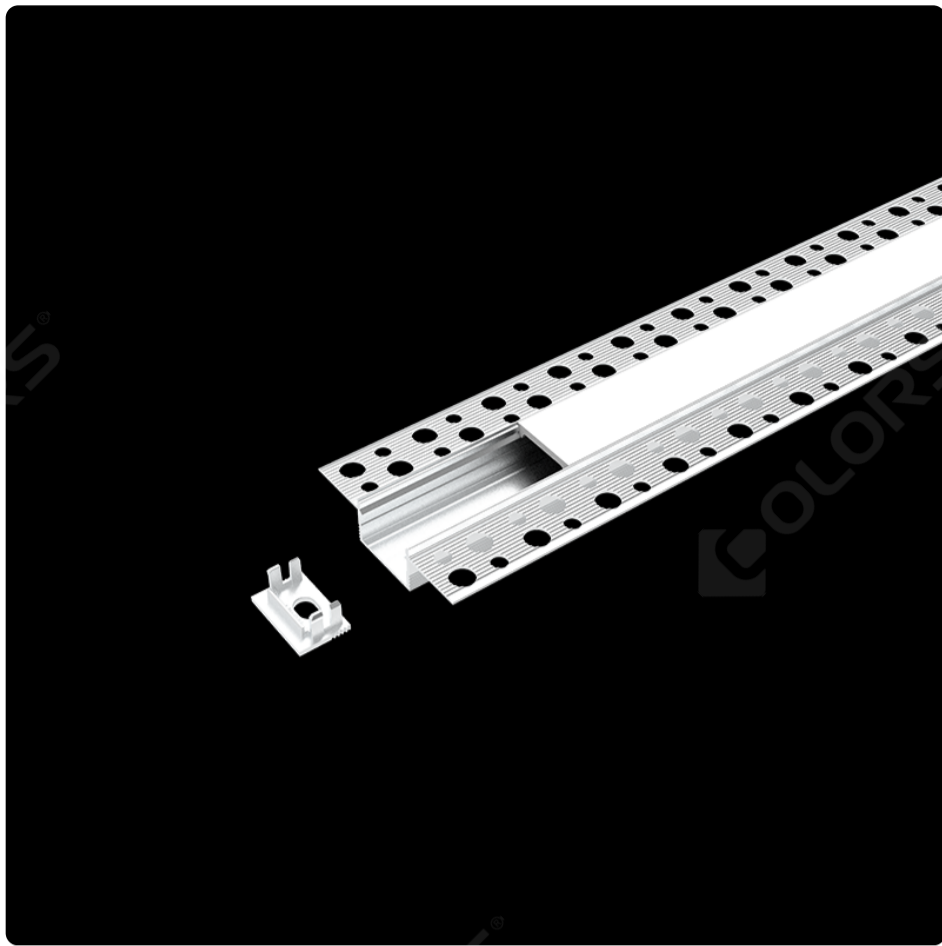

## BR2013(A)

### Basic Parameters

Material AL6063-T5,anodizing


IP Grade IP20

Warranty 5 years

### Electrical Parameters

### Optical Parameters

### Dimensions

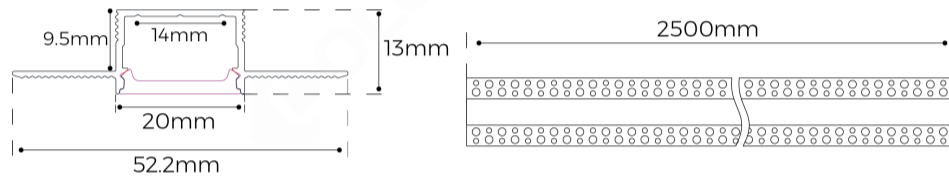


### Luminaire Parameters

| Version | Size(mm) | Power(W) | PCB Current(A) | CRI | CCT   | Lumens(LM) @White, S liver |
|---------|----------|----------|----------------|-----|-------|----------------------------|
| Regular | 1000mm   | 16       | 0.66           | >90 | 4000K | 720                        |
| Regular | 1000mm   | 16       | 0.66           | >90 | 2700K | 613                        |
| Regular | 1000mm   | 16       | 0.66           | >90 | 3000K | 655                        |
| Regular | 1000mm   | 16       | 0.66           | >90 | 6000K | 720                        |

### Light Distribution

Regular-115°



| h(m) | D(cm) | E(lx) |
|------|-------|-------|
| 1    | 311   | 238   |
| 2    | 622   | 59    |
| 3    | 934   | 26    |
| 4    | 1245  | 14    |

### Common Accessories

## Installation accessory



CL-01

Applicable product model:LE1616/LG2323/LG2727/LG7043/LG7070/LR0812/LR1613/LR1616/LR2013/LR3735/LR3840(A)/LR3840(B)/LR3924/LR3943/SK10032/SK6013(A)/SK6013(B)/LR5535(A)/LR5535(B)/LS3360/LS4067/LS5470(F)/LS7977/AS3535-2500/AS3535-08A45/90/AS3535-15A45/90/AS3535-30A45/AS3535-03A90/AS3535-03N90/AS3535-03W90/AS3535-15N90/AS3535-15W90/LR25/BH3360/BH5470/BH7977/BS3360/BS5470/BS7977  
Installation method: Ceiling Material process: Carbon Steel Size: M3.5\*40mm  
Quantity: 4 PCS/ set Others:4 pcs screws+4 pcs expansion tube

## Packing

| Size (mm/box) | Quantity /box | QTY/CTN | NW (kg/box) | N. WT (ctn) | G.WT (ctn) | Size (cm/carton) | Product Size (mm) |
|---------------|---------------|---------|-------------|-------------|------------|------------------|-------------------|
| 2510*60*34    | 12            | 24      | 1.1         | 12.2        | 17.6       | 253*24.8*24.3    | 2500*522*13       |
| /             | /             | 40      | 0.51        | 20.32       | 22.8       | 253*24.8*24.3    | 2500*522*13       |

## Attentions

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting.
- 4、 Do not use any acid or alkaline adhesive to fix products.
- 5、 The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
- 6、 PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use.