


# Specification

Architecture lighting integration series

LR1613




# LR1613

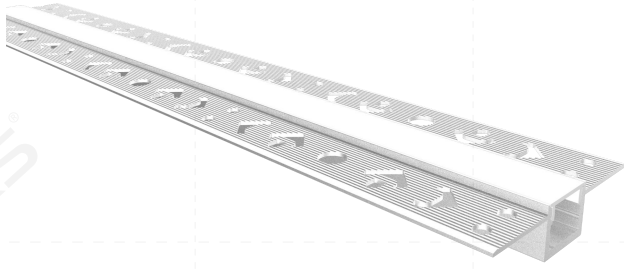

## Features



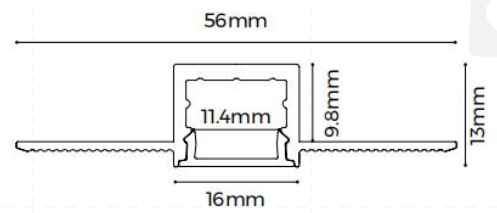

- 10mm luminous surface, rimless recessed design, integrated into architecture.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting end cap design without screw, make installation more convenient.



## Standard Configuration

Picture	Item	Parameter	Model
	Profile	Profile weight: 0.7kg/2.5m Size: L2500*W56*H13mm Material: AL6063-T5 Surface processing: Anodizing	/
	Cover	Type: Frosted diffuser Material: PC Light transmittance: 60% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L16*W13*H7mm Material: PC	EC-LR1613



## Optional Accessories

Picture	Item	Parameter	Model
	Microprism diffuser	Type: Microprism diffuser Material: PC Light transmittance: 65% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	CV-LR1613
	Black Microprism	Type: Black Microprism Material: PC Light transmittance: 15% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	CV-LR1613
	Flexible strip D6140-24V-8mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage: 24V; Power: 6.6W/m; Lumen: 710Lm/m; PCB width: 8mm; Minimum cut: 50mm;	D6140-24V- 8mm
	End cap with hole	Size: L16*W13*H7mm Material: PC	EC-LR1613
	Screw	Size: M3.5*40mm Material: Carbon steel	CL-01




## Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

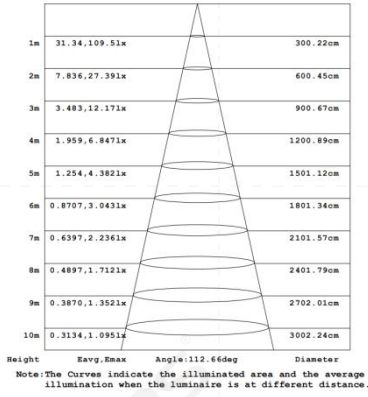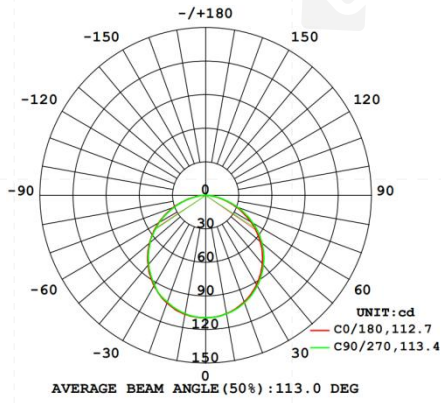

## Package

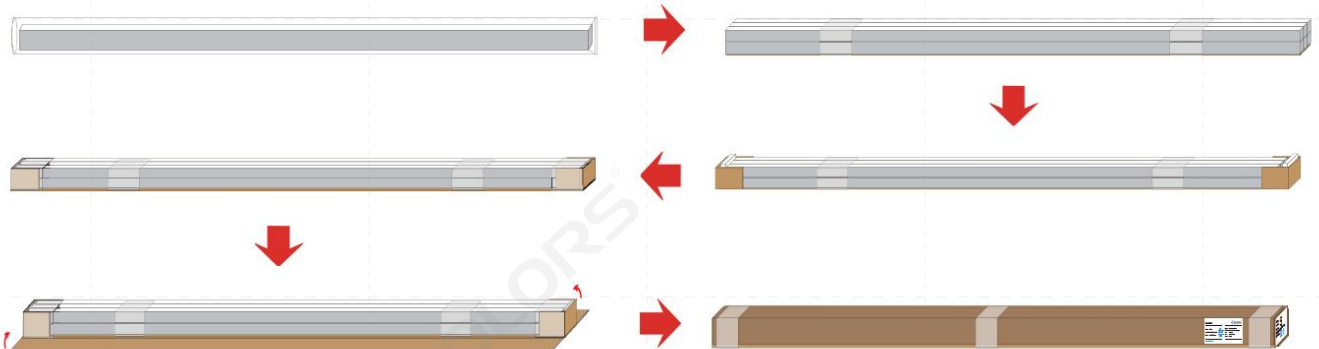

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	28	31	35pcs/box

