

Specification

Architecture lighting integration series

LR2013




LR2013



Features



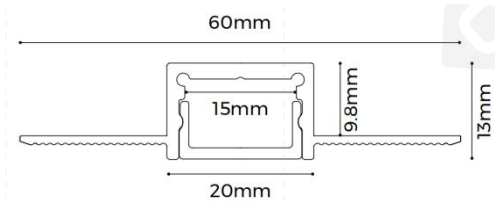


- 20mm luminous surface, rimless recessed design, integrated into architecture.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting end cap design without screw, make installation more convenient.



Standard Configuration

Picture	Item	Parameter	Model
	Profile	Profile weight: 0.84kg/2.5m Size: L2500*W60*H13mm Material: AL6063-T5 Surface processing: Anodizing	/
	Cover	Type: Frosted diffuse Material: PC Light transmittance: 60% Size: L2500*W16.7*H7.8mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L20*W13*H4.5mm Material: PC	EC-LR2013



Optional Accessories

Picture	Item	Parameter	Model
	Microprism diffuser	Type: Microprism diffuser Material: PC Light transmittance: 65% Size: L2500*W16.7*H7.8mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	CV-LR2013
	Black Microprism	Type: Black Microprism Material: PC Light transmittance: 7% Size: L2500*W16.7*H7.8mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	CV-LR2013
	Flexible strip D6280-24V-10mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage: 24V; Power: 15W/m; Lumen: 1508lm/m; PCB width: 10mm; Minimum cut: 50mm;	D6280-24V- 10mm
	End cap with hole	Size: L20*W13*H4.5mm Material: PC	EC-LR2013
	Screw	Size: M3.5*40mm Material: Carbon steel	CL-01




Optical Parameter

The testing result of 1M luminaire (with " D6280-24V-10mm " and diffuser)

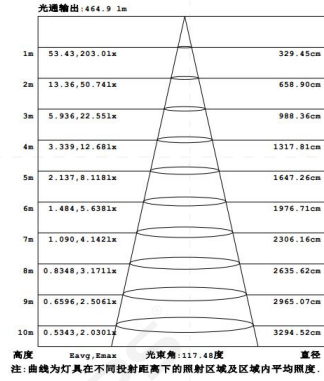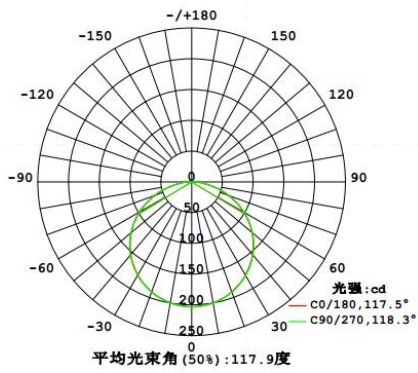

Package

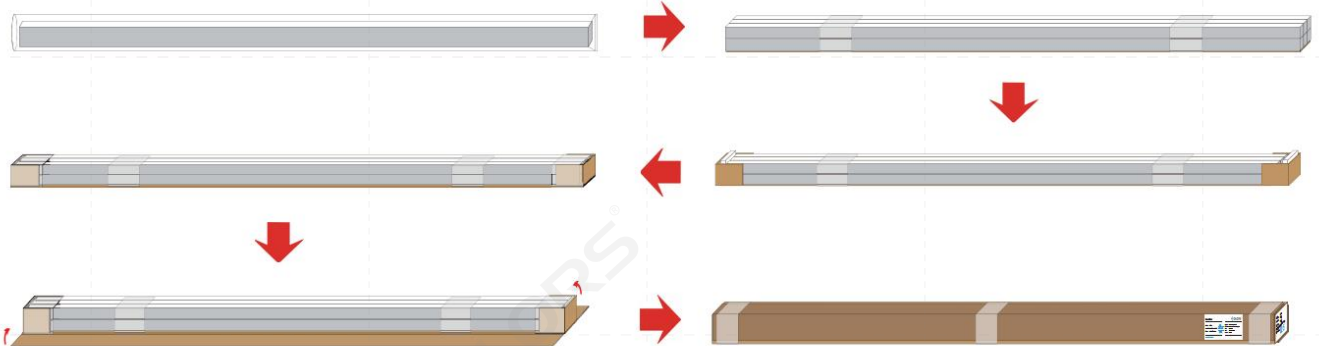

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*173*140mm	32.9	35.9	35pcs/box

