

# Specification

Architecture lighting integration series

LR3924




LR3924






## Features

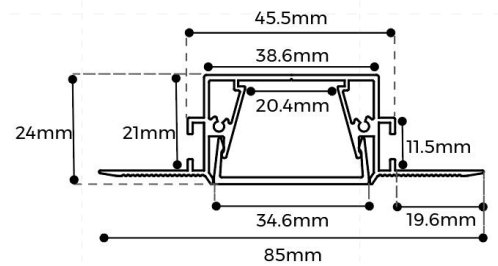

- 35mm luminous surface, rimless recessed design, integrated into architecture.
- PC diffuser made in Germany, products soft and comfortable lighting.
- AL6063-T5 aluminum profile with high-quality surface treatment.



## Standard Configuration



Picture	Item	Parameter	Model
	Profile	Profile weight: 1.6kg/2.5m Size: L2500*W85*H24mm Material: AL6063-T5 Surface processing: Anodizing	/
	Cover	Type: Frosted diffuser Material: PC Light transmittance: 70% Size: L2500*W34.2*H10.2mm PC Feature: The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	End caps	Size: L38.6*W24*H2mm Material: PC	EC-LR3924

## Optional Accessories


Picture	Item	Parameter	Model
	Flexible strip D8280-24V-20mm	Material:FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K; CRI > 80/>95; Voltage: 24V; Power: 20W/m; Lumen: 2700Lm/m; Width: 20mm; Minimum cutting unit: 14LEDs/50mm;	D8280-24V- 20mm
	Screw	Size: M3.5*40mm Material: Carbon steel	CL-01

## Optical Parameter

(D8280-24V-20mm light source, frosted diffuser)

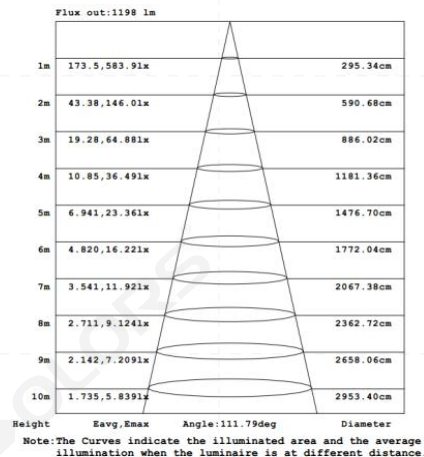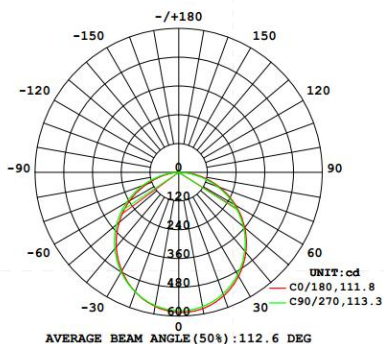

**Package**

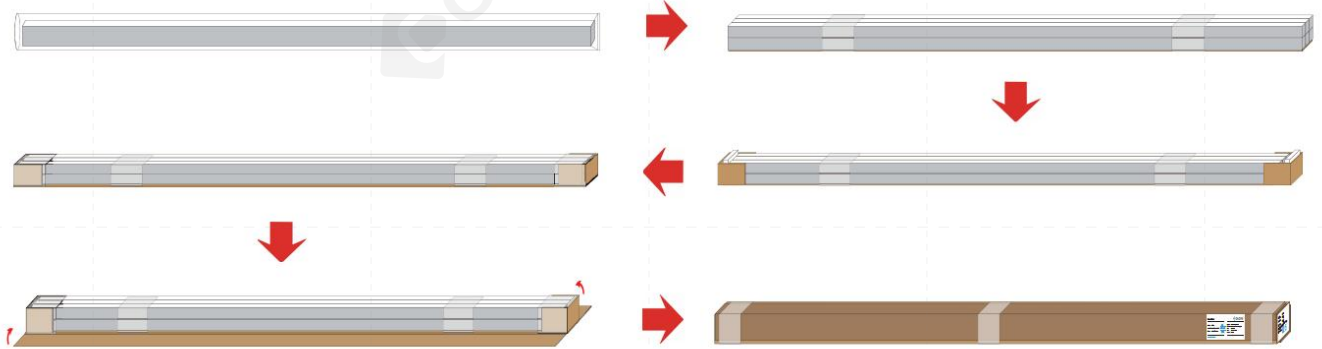

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*200*175mm	18.94	21.94	12pcs/box

