



# Specification

Integrated Furniture Lighting

LS1911C



## LS1911C

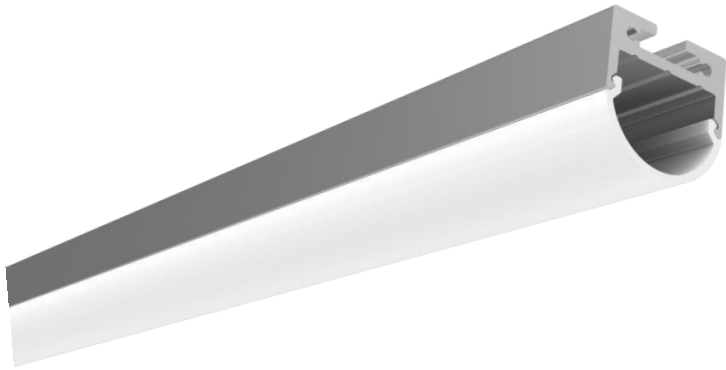


### Features


DLS1.0, a special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.




- 1、 "Dots-free" lighting  
Perfect homogenous lighting.
- 2、 Various diffuser options  
Several options of diffusers, In various shapes and light distribution plans Complete with everything needed
- 3、 "Two" end caps  
Two options of end cap for two ways of wire outgoing, Close-fitting design without screws makes installation much easier
- 4、 Various installation methods  
A wide range of installation accessories wider applications
- 5、 "One" cut  
Consistent length between diffuser and profile
- 6、 Smart control for unlimited possibilities  
Perfectly match the profiles like customized, Control by hand sweep or touching

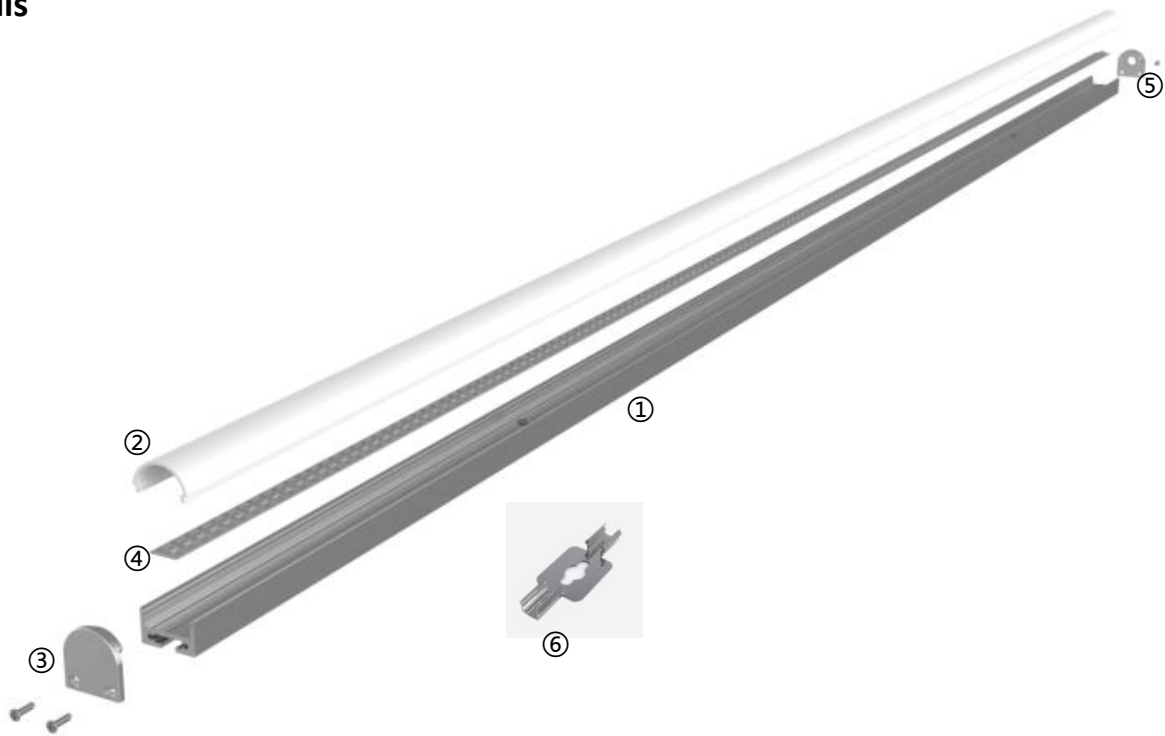

## Details














## Standard Configuration

Picture	Item	Parameter	Model
	①Profile	Material: AL6063-T5 Profile weight: 0.56kg/2.5m Size: L2500*W19.7*H11mm Surface processing: Anodizing	/
	②Cover	Type: Frosted diffuse Material: PC Light transmittance: 85% Size: L2500*W19.7*H10.6mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	③End caps	Size: L19.7*W19.6*H5mm	EC-LS1911C





## Optional Accessories

Picture	Item	Parameter	Model
	④FPC strip D6280-24V-10mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage:24V; Power: 15W/m; Lumen: 1508Lm/m; PCB width: 10mm; Minimum cut: 50mm;	D6280-24V- 10mm
	⑤End cap with hole	Size: L19.7*W19.6*H5mm	EC-LS1911C
	⑥Clips	Size: L38*W15*H4.5mm	CP-07
	Pendant-with junction box	Cord:D1.5*2000mm(D1.5*4000mm) Box:L80*W80*H30mm	PY-D
	Pendant-without junction box	Cord:D1.5*2000mm(D1.5*4000mm)	PN-D
	pendant-wire and line in one 2m/4m	2-in-1 cable:D3*2000mm(D3*4000mm)	PE-K
	180° straight splicing bar	Size: 80*10*2mm	EX-E1
	L-type splicing bar	Size: 45*45*2mm	EX-E2
	7-type splicing bar	Size:41.5*10*2mm	EX-E3
	T-type splicing bar	Size:80*45*2mm	EX-E4
	X-type splicing bar	Size:80*80*2mm	EX-E5



## Optical Parameter

The testing result of 1M luminaire (with " D6280-24V-10mm " and diffuser)

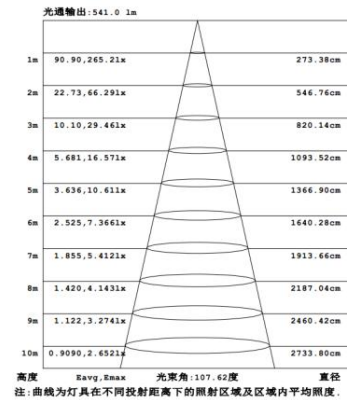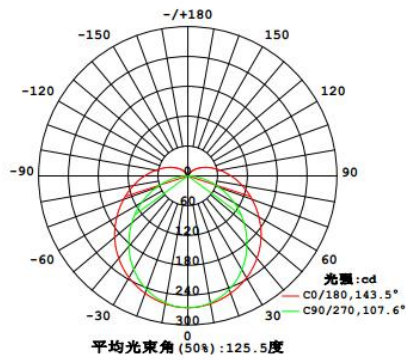


## Package

Mode 1 :



Mode 2 :

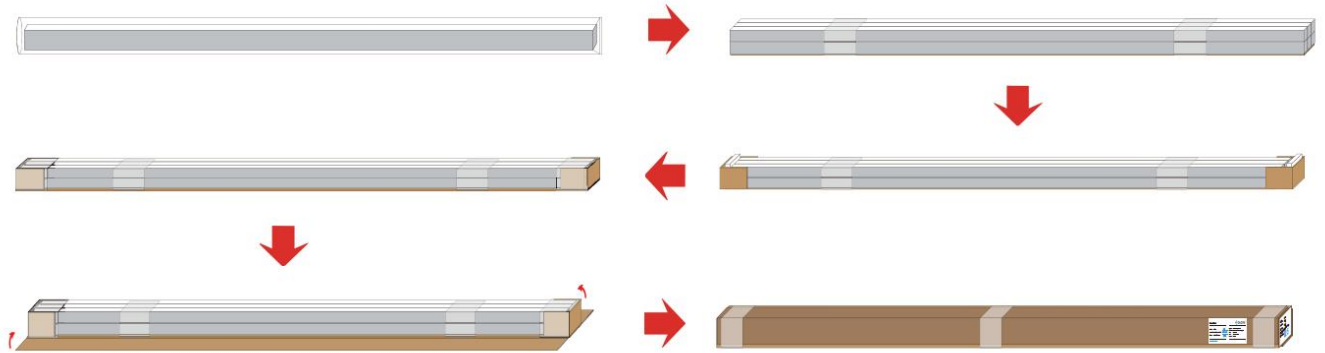

Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
Single piece	Hat box	2580*41*27.5mm	0.76	1.36	1pcs/box
Whole bundle	Hat box	2580*250*165mm	19	36	25pcs/box
Whole box packaging	Paper box	2580*95*100mm	6.84	9.84	9pcs/box

