


LINE LINK Pendant&Surface

MS35FD

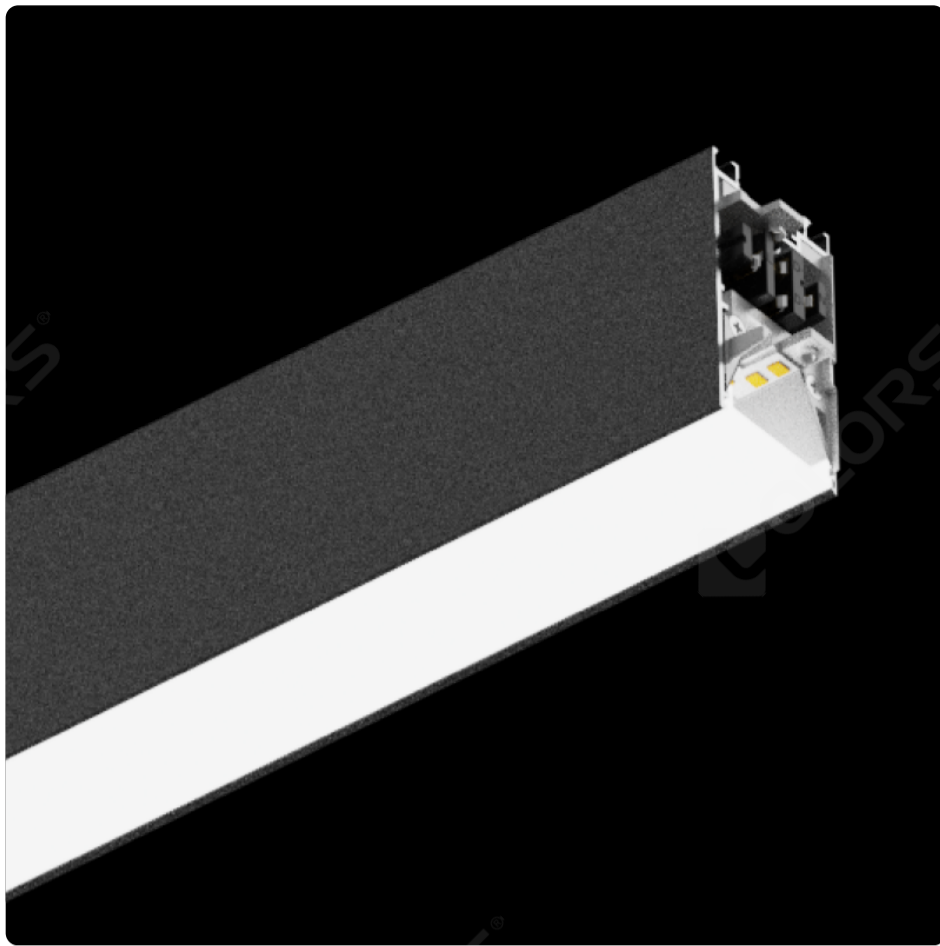

MS35FD

Basic Parameters

Material	AL6063-T5, spraying surface
IP Grade	IP20
Warranty	5 years


Electrical Parameters

Input Voltage	AC220-240V
Control	Non-Dimming,1-10V Dimming,DALI Dimming

Optical Parameters

Version	Regular,High efficiency,Regular-3 CCT Dial Switch,High efficiency-3 CCT Dial Switch
Length	1200mm,1800mm,2400mm
CRI	>80,>90
CCT	2700K,3000K,4000K,6500K,3000K-4200K-6500K
Beam Angle	100°

Dimensions

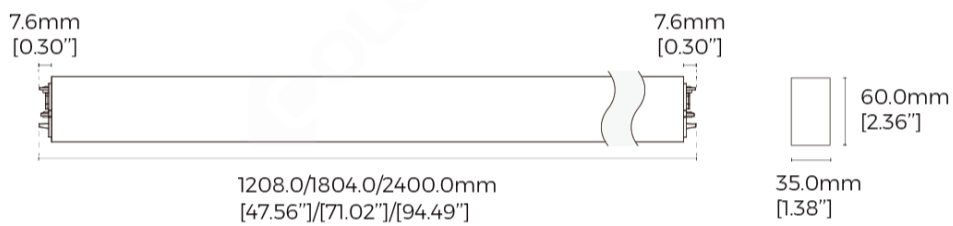

Luminaire Parameters


Version	Size	Power(W)	PCB Current(A)	CRI	CCT	Lumens(LM) @White, Silver	Lumens(LM) @Black
Regular-3 CCT Dial Switch	1800	45	1	>80	4200K	4500	4050
Regular-3 CCT Dial Switch	2400	58	1.3	>80	4200K	5800	5220
Regular-3 CCT Dial Switch	1200	29	0.65	>90	4200K	2494	2244.6
Regular-3 CCT Dial Switch	1800	45	1	>90	4200K	3870	3483
Regular-3 CCT Dial Switch	2400	58	1.3	>90	4200K	4988	4489.2
Regular-3 CCT Dial Switch	1200	29	0.65	>80	3000K	2610	2349
Regular-3 CCT Dial Switch	1800	45	1	>80	3000K	4050	3645
Regular-3 CCT Dial Switch	2400	58	1.3	>80	3000K	5220	4698
Regular-3 CCT Dial Switch	1200	29	0.65	>90	3000K	2244.6	2020.14
Regular-3 CCT Dial Switch	1800	45	1	>90	3000K	3483	3134.7
Regular-3 CCT Dial Switch	2400	58	1.3	>90	3000K	4489.2	4040.28
Regular-3 CCT Dial Switch	1200	29	0.65	>80	6500K	2610	2349
Regular-3 CCT Dial Switch	1800	45	1	>80	6500K	4050	3645
Regular-3 CCT Dial Switch	2400	58	1.3	>80	6500K	5220	4698
Regular-3 CCT Dial Switch	1200	29	0.65	>90	6500K	2244.6	2020.14
Regular-3 CCT Dial Switch	1800	45	1	>90	6500K	3483	3134.7
Regular-3 CCT Dial Switch	2400	58	1.3	>90	6500K	4489.2	4040.28

Regular	1200	29	0.65	>80	4000K	3190	2871
Regular	1800	45	1	>80	4000K	4950	4455
Regular	2400	58	13	>80	4000K	6380	5742
Regular	1200	29	0.65	>90	4000K	2743.4	2469.06
Regular	1800	45	1	>90	4000K	4257	3831.3
Regular	2400	58	13	>90	4000K	5486.8	4938.12
Regular	1200	29	0.65	>80	2700K	2711.5	2440.35
Regular	1800	45	1	>80	2700K	4207.5	3786.75
Regular	2400	58	13	>80	2700K	5423	4880.7
Regular	1200	29	0.65	>90	2700K	2331.89	2098.701
Regular	1800	45	1	>90	2700K	3618.45	3256.605
Regular	2400	58	13	>90	2700K	4663.78	4197.402
Regular	1200	29	0.65	>80	3000K	2871	2583.9
Regular	1800	45	1	>80	3000K	4455	4009.5
Regular	2400	58	13	>80	3000K	5742	5167.8
Regular	1200	29	0.65	>90	3000K	2469.06	2222.154
Regular	1800	45	1	>90	3000K	3831.3	3448.17
Regular	2400	58	13	>90	3000K	4938.12	4444.308
Regular	1200	29	0.65	>80	5000K	3190	2871
Regular	1800	45	1	>80	5000K	4950	4455
Regular	2400	58	13	>80	5000K	6380	5742
Regular	1200	29	0.65	>90	5000K	2743.4	2469.06
Regular	1800	45	1	>90	5000K	4257	3831.3
Regular	2400	58	13	>90	5000K	5486.8	4938.12
Regular	1200	29	0.65	>80	6500K	3190	2871
Regular	1800	45	1	>80	6500K	4950	4455
Regular	2400	58	13	>80	6500K	6380	5742
Regular	1200	29	0.65	>90	6500K	2743.4	2469.06
Regular	1800	45	1	>90	6500K	4257	3831.3
Regular	2400	58	13	>90	6500K	5486.8	4938.12
High-Efficiency	1200	22	0.5	>80	4000K	3080	2772
High-Efficiency	1800	33	0.75	>80	4000K	4620	4158
High-Efficiency	2400	44	1	>80	4000K	6160	5544
High-Efficiency	1200	22	0.5	>90	4000K	2833.6	2550.24
High-Efficiency	1800	33	0.75	>90	4000K	4250.4	3825.36
High-Efficiency	2400	44	1	>90	4000K	5667.2	5100.48
High-Efficiency	1200	22	0.5	>80	2700K	2926	2633.4
High-Efficiency	1800	33	0.75	>80	2700K	4389	3950.1
High-Efficiency	2400	44	1	>80	2700K	5852	5266.8
High-Efficiency	1200	22	0.5	>90	2700K	2691.92	2422.728
High-Efficiency	1800	33	0.75	>90	2700K	4037.88	3634.092
High-Efficiency	2400	44	1	>90	2700K	5383.84	4845.456
High-Efficiency	1200	22	0.5	>80	3000K	3080	2772
High-Efficiency	1800	33	0.75	>80	3000K	4620	4158
High-Efficiency	2400	44	1	>80	3000K	6160	5544
High-Efficiency	1200	22	0.5	>90	3000K	2833.6	2550.24
High-Efficiency	1800	33	0.75	>90	3000K	4250.4	3825.36
High-Efficiency	2400	44	1	>90	3000K	5667.2	5100.48
High-Efficiency	1200	22	0.5	>80	5000K	3080	2772
High-Efficiency	1800	33	0.75	>80	5000K	4620	4158
High-Efficiency	2400	44	1	>80	5000K	6160	5544

High-Efficiency	1200	22	0.5	>90	5000K	2833.6	2550.24
High-Efficiency	1800	33	0.75	>90	5000K	4250.4	3825.36
High-Efficiency	2400	44	1	>90	5000K	5667.2	5100.48
High-Efficiency	1200	22	0.5	>80	6500K	3080	2772
High-Efficiency	1800	33	0.75	>80	6500K	4620	4158
High-Efficiency	2400	44	1	>80	6500K	6160	5544
High-Efficiency	1200	22	0.5	>90	6500K	2833.6	2550.24
High-Efficiency	1800	33	0.75	>90	6500K	4250.4	3825.36
High-Efficiency	2400	44	1	>90	6500K	5667.2	5100.48
High efficiency-3 CCT Dial Switch	1200	22	0.5	>80	4200K	2860	2574
High efficiency-3 CCT Dial Switch	1800	33	0.75	>80	4200K	4290	3861
High efficiency-3 CCT Dial Switch	2400	44	1	>80	4200K	5720	5148
High efficiency-3 CCT Dial Switch	1200	22	0.5	>90	4200K	2631.2	2368.08
High efficiency-3 CCT Dial Switch	1800	33	0.75	>90	4200K	3946.8	3552.12
High efficiency-3 CCT Dial Switch	2400	44	1	>90	4200K	5262.4	4736.16
High efficiency-3 CCT Dial Switch	1200	22	0.5	>80	3000K	2750	2475
High efficiency-3 CCT Dial Switch	1800	33	0.75	>80	3000K	4125	3712.5
High efficiency-3 CCT Dial Switch	2400	44	1	>80	3000K	5500	4950
High efficiency-3 CCT Dial Switch	1200	22	0.5	>90	3000K	2530	2277
High efficiency-3 CCT Dial Switch	1800	33	0.75	>90	3000K	3795	3415.5
High efficiency-3 CCT Dial Switch	2400	44	1	>90	3000K	5060	4554
High efficiency-3 CCT Dial Switch	1200	22	0.5	>80	6500K	2860	2574
High efficiency-3 CCT Dial Switch	1800	33	0.75	>80	6500K	4290	3861
High efficiency-3 CCT Dial Switch	2400	44	1	>80	6500K	5720	5148
High efficiency-3 CCT Dial Switch	1200	22	0.5	>90	6500K	2631.2	2368.08
High efficiency-3 CCT Dial Switch	1800	33	0.75	>90	6500K	3946.8	3552.12
High efficiency-3 CCT Dial Switch	2400	44	1	>90	6500K	5262.4	4736.16


Light Distribution

Regular Version




h(m)	D(cm)	E(lx)
1	228	1285
2	457	321
3	685	143
4	913	80

High efficiency Version




h(m)	D(cm)	E(lx)
1	229	1396
2	459	349
3	688	155
4	918	87

Regular-3CCT Dial Switch Version



h(m)	D(cm)	E(lx)
1	226	1139
2	451	285
3	677	127
4	902	71

High efficiency-3CCT Dial Switch Version



h(m)	D(cm)	E(lx)
1	226	1344
2	451	336
3	677	149
4	902	71

Common Accessories

Standard Corner



MS35FD-L90

Applicable product model: MS35FD
Installation method: L-shaped 90° splicing
Material process: AL6063-T5/spraying
Coating: Black(RAL9006), White(RAL9003)
Diffuser Nature: Diffuser
Light source: Constant Current Rigid PCB
Size: L300*W35*H60mm

Power feeder



CM-25

Applicable product model: MS35/MH35 Type: Non-dimming Input line(3PIN) Material process: Wiring cover: SPCC/Input line: PVC Size: Wiring cover: 108.5*30.2*4mm/Input line: 2200*φ6mm Quantity: 1PCS/ set Others: Including 1pcs wiring cover+1pcs input line



CM-26

Applicable product model: MS35/MH35 Type: Dimming Input line(5PIN) Material process: Wiring cover: SPCC/Input line: PVC Size: Wiring cover: 108.5*30.2*4mm/Input line: 2200*φ7.2mm Quantity: 1PCS/ set Others: Including 1pcs wiring cover+1pcs input line

Cover



CV-MS35FD

Applicable product model: MS35FD/MH35FD(suitable for down-lighting) Diffuser Nature: Diffuser Material process: PC Light transmittance: 80% Size: 50m/Reel: 50000*30.9*5.6mm Other: Fire protection rating UL94-V2;

End cap accessory



EC-MS35

Applicable product model: MS35/MH35 Material process: ADC12/powder-coated Size: L35.2*W60.7*H17mm Quantity: 2PCS/ set

Installation accessory



PN(E)-D

Applicable product model: LINE ECO series
Installation method: Pendant
Material process: Nickel plating
Size: /
Quantity: 2PCS/SET
Other: 2 meter wire rope 2PCS, cable locker 2PCS, cable holder 2PCS, M5 flat head Phillips screws 2PCS, M4*35mm screws 2PCS, expansion tube 2PCS



PN-DXX

Applicable product model: LS1911C/LS1911K/LS3535/LS5050/LS3360/LS4067/LS5470(F)/LS7977/LT60/BH3360/BH5470/BH7977/BS3360/BS5470/BS7977/LS5470(F)/LS7977/LT60/LINE40 series product/LINE60 series product/TLS-R6X0 track
Installation method: Pendant
Material process: Pearl Chrome
Size: /
Quantity: 2PCS/ set
Other: Junction box not included, 2 pcs pendant cable accessory, pendant cable length 4m, rectangular screw model.



PY(E)-D

Applicable product model: MS35/MH35/MS50/MH50/MS70/MH70
Installation method: Junction Box (pendant wire)
Material process: SPCC/Spraying surface
Size: Box: D80*30*1mm, Pendant wire: D1.5*2000/4000mm
Quantity: 1 set
Other: Including junction box, 2PCS wire rope, wire rope 2M/4M length optional

Packing

Size (mm/box)	Quantity /box	QTY/CTN	NW (kg/box)	N. WT (ctn)	G.WT (ctn)	Size (cm/carton)	Product Size (mm)
1215*80*40mm	1	8	1.15	9.2	11.3	1220*185*175mm	1208*35*60mm
1815*80*40mm	1	8	1.9	15.2	18.1	1820*185*175mm	1803*35*60mm
2410*80*40mm	1	8	2.45	19.6	23.3	2410*185*175mm	2399*35*60mm

Attentions

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting.
- 4、 Do not use any acid or alkaline adhesive to fix products.
- 5、 The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
- 6、 PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use.