


Specification






SKYLINE



Design principles

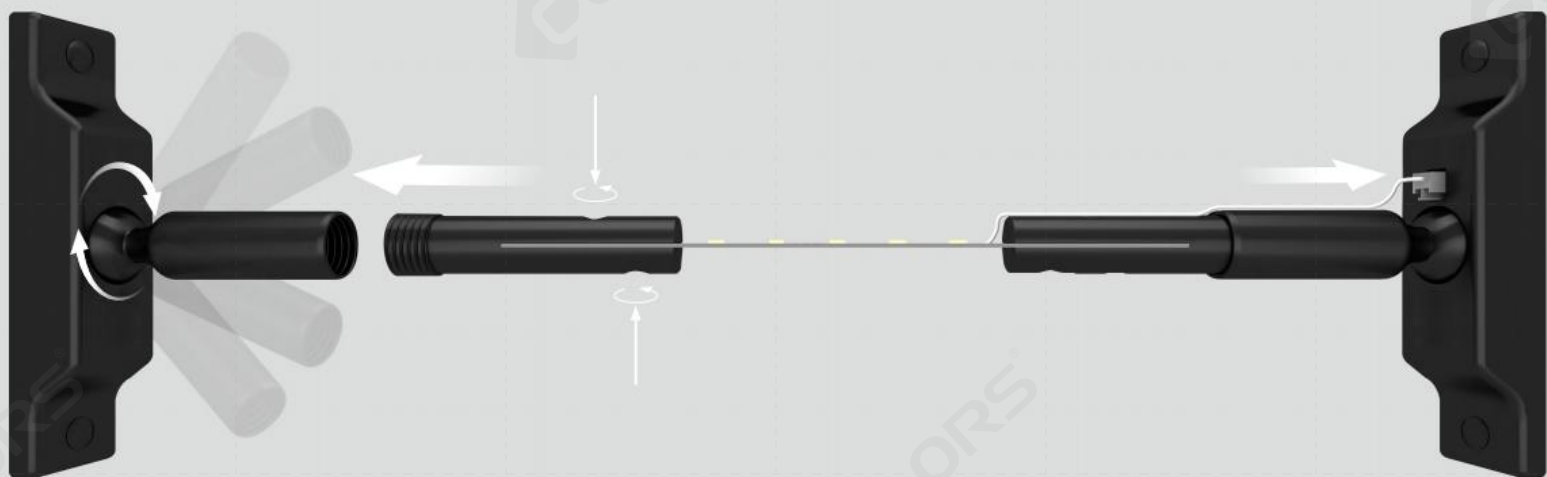

Application Guidelines

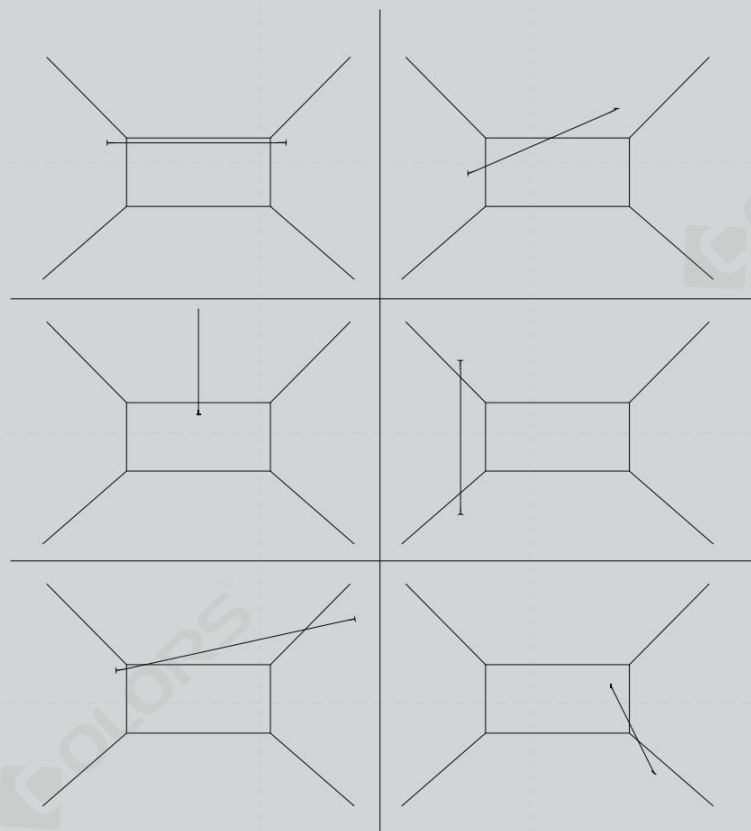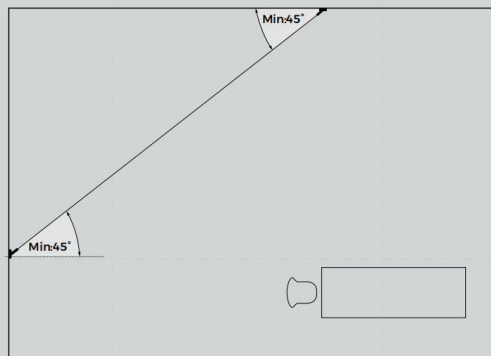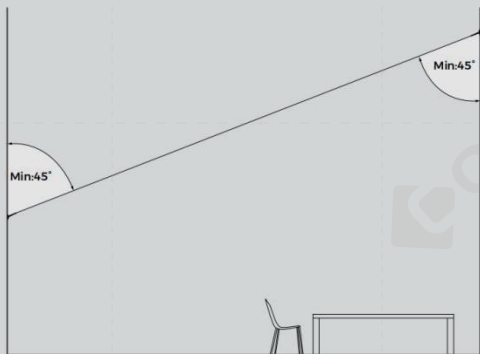

Installation guidelines

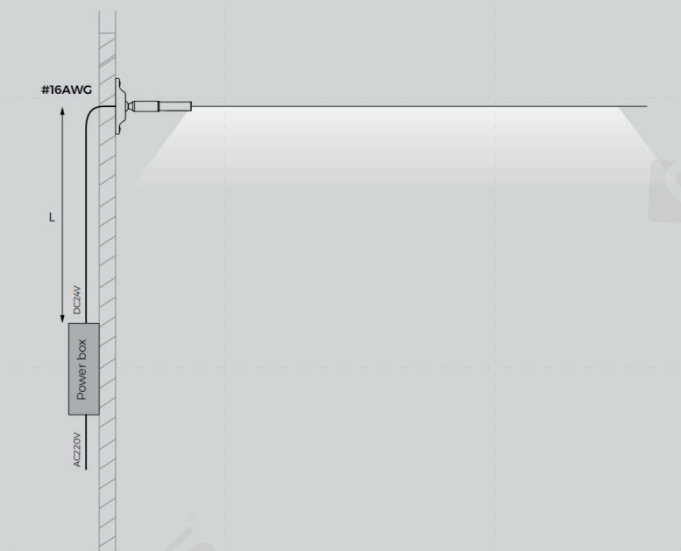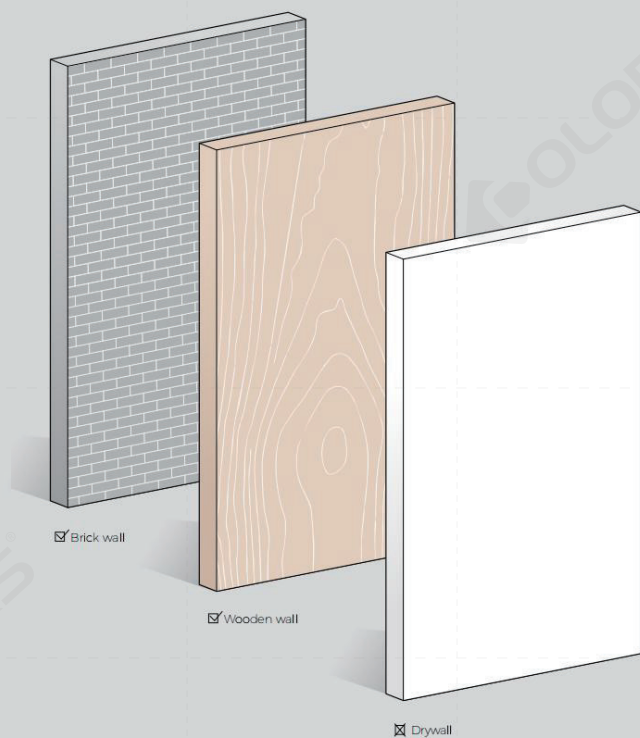

SKY-06A: Lmax=9M; 13.5W/m; DC24V
SKY-06B: Lmax=9M; 9.6W/m; DC24V
SKY-12C: Lmax=7M; 8.7W/m; DC24V
SKY-20C: Lmax=5M; 8.7W/m; DC24V
SKY-06D: AC220-240V; Driverless
*Please calculate the required power according to the actual length

SKY-06B

6M

COF Strip

Dot-free

Direct

Lighting

9.6

W/m

910

LM/m

DC

24V

>90

2700 K

3000 K

4000 K

6000 K

SKY-06A

6M

High Lumen strip

Indirect

Lighting

13.5

W/m

1320

LM/m

DC

24V

>90

2700 K

3000 K

4000 K

6000 K

SKY-12C

12M

Ultra long strip

Indirect

Lighting

8.7

W/m

890

LM/m

DC

24V

>90

2700 K

3000 K

4000 K

6000 K

SKY-20C

20M

Ultra long strip

Indirect

Lighting

8.7

W/m

890

LM/m

DC

24V

>90

2700 K



3000 K

4000 K



6000 K

Model	SKY-06B	SKY-06A	SKY-12C	SKY-20C
Length	6M	6M	12M	20M
Lighting source				
Cutting Unit	50mm	50mm	50mm	50mm
Input voltage	DC24V	DC24V	DC24V	DC24V
CCT	2700 K 3000 K 4000 K 6000 K	2700 K 3000 K 4000 K 6000 K	2700 K 3000 K 4000 K 6000 K	2700 K 3000 K 4000 K 6000 K
CRI	>90	>90	>90	>90
Typ. power	9.6W/m	13.5W/m	8.7W/m	8.7W/m
Lumens	910LM/m	1320LM/m	890LM/m	890LM/m
Color				



Optical & electronic data

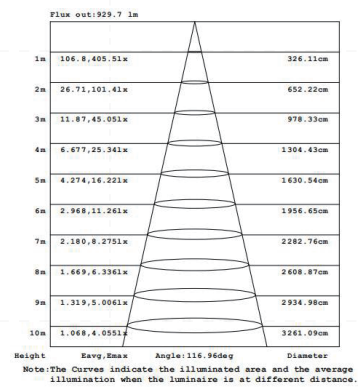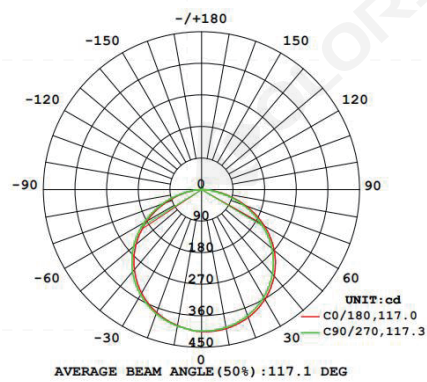

A

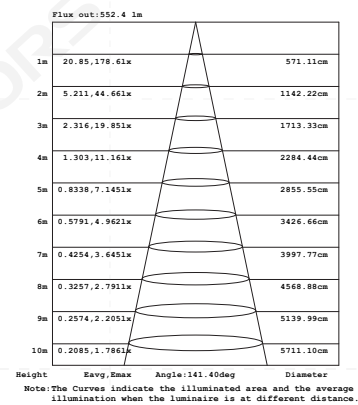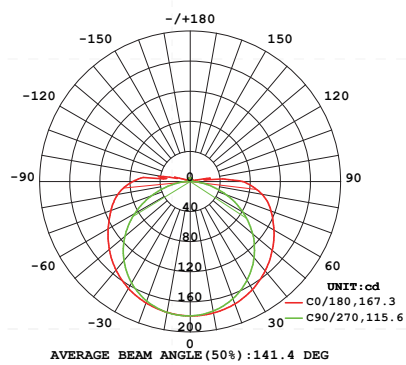

B

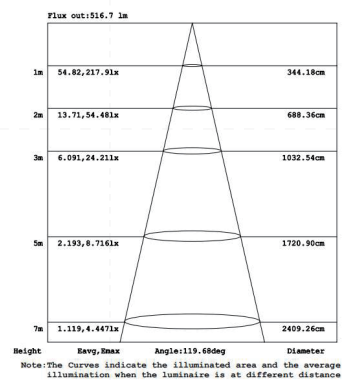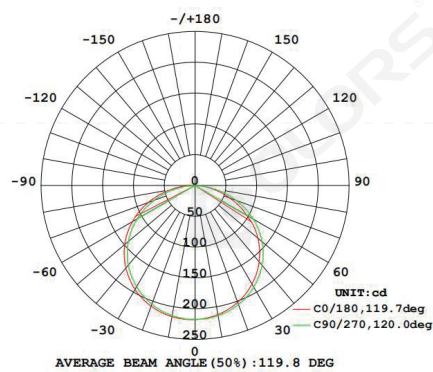


C

Packing



Components	Packaging material	Size(mm)	Type	GW	Content
Single piece	Hat box	352*346*70mm	6m	2kg	1pcs
Whole bundle	Hat box	365*360*295mm	6m	8kg	4pcs
Single piece	Hat box	352*346*70mm	12m	2.52kg	1pcs
Whole bundle	Hat box	365*360*295mm	12m	10.08kg	4pcs
Single piece	Hat box	352*346*70mm	20m	3.15kg	1pcs
Whole bundle	Hat box	365*360*295mm	20m	12.6kg	4pcs

Dimension(mm)

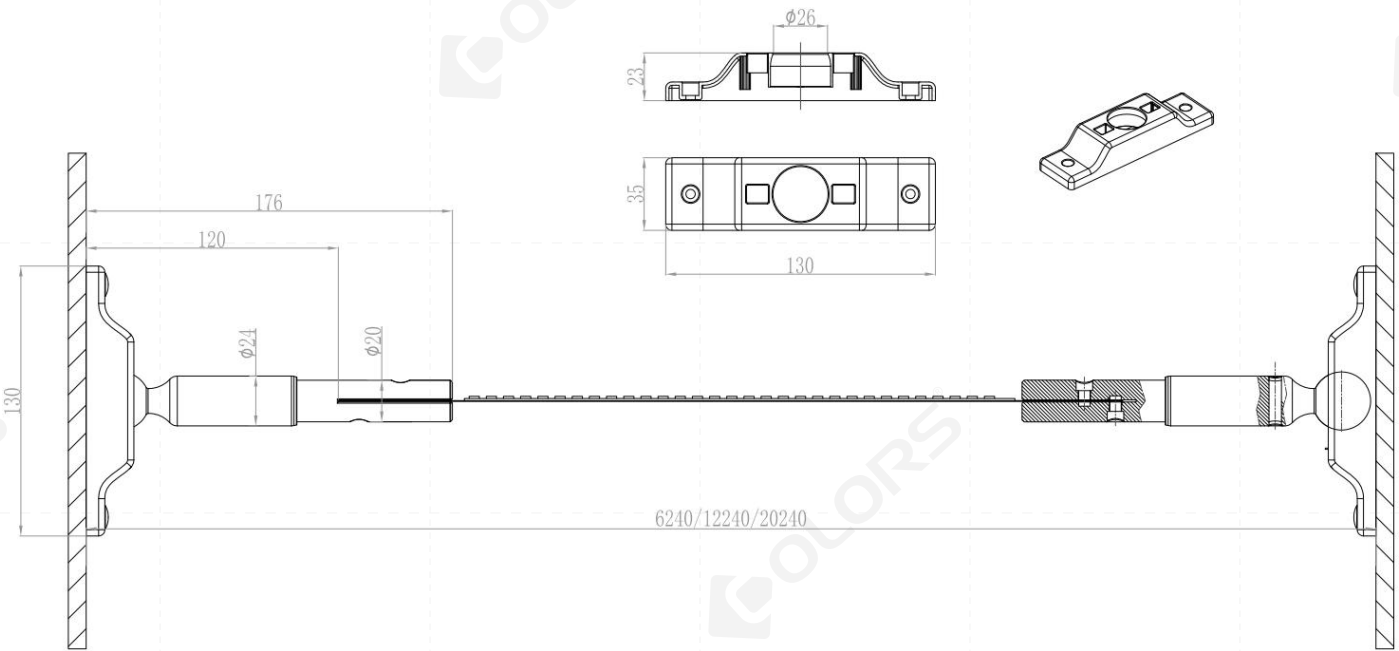

Ordering code

Category		Length		Light Source Type		CRI		CCT		Color		
Skyline	SKY	-	6000mm	06	D8120-24V-8mm	A	>90	9	2700K	27	Black	B
			12000mm	12	DRF10-24V-8mm	B			3000K	30		
			20000mm	20	DS8120-24V-8mm	C			4000K	40		
									6000K	60		
	SKY	-		06	A		9		40		B	

Attentions:

- Please install the product in the right environment as much as possible;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.



Tel: +86-755-2923-1888

E-mail: colors@colorsled.com

Web: www.colorsled.com

Add: 17F, Block B, Building 2, North of Skyworth

Inno Valley, Shiyan town, Bao'an District, Shenzhen