

Aluminum accessory Specification

AS-AFS1217A5-1000

AS-AFS1217A4-1000

AS-AFS1217A4-35

AS-NMS1217M1-500




【Features】

- **Material:** aluminum;
- **Operating environment:** indoor and outdoor;
- **Installation:** screw flat mounting;
- **Warranty:** 6 years.



【Mechanical Parameter】

AS-AFS1217A5-1000


Profile bend radius
 $R \geq 400\text{mm}$

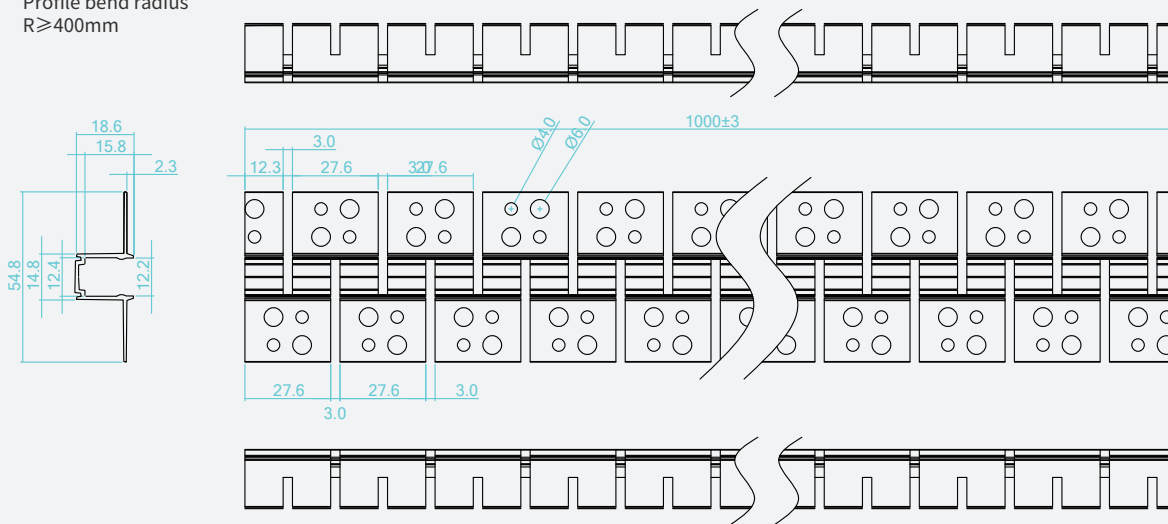


AS-AFS1217A4-1000

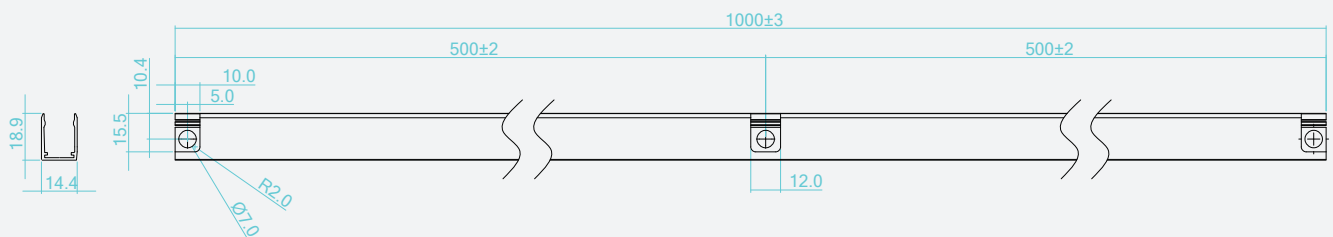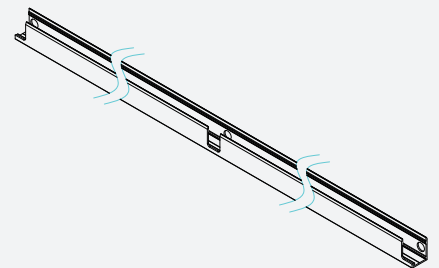





AS-AFS1217A4-35

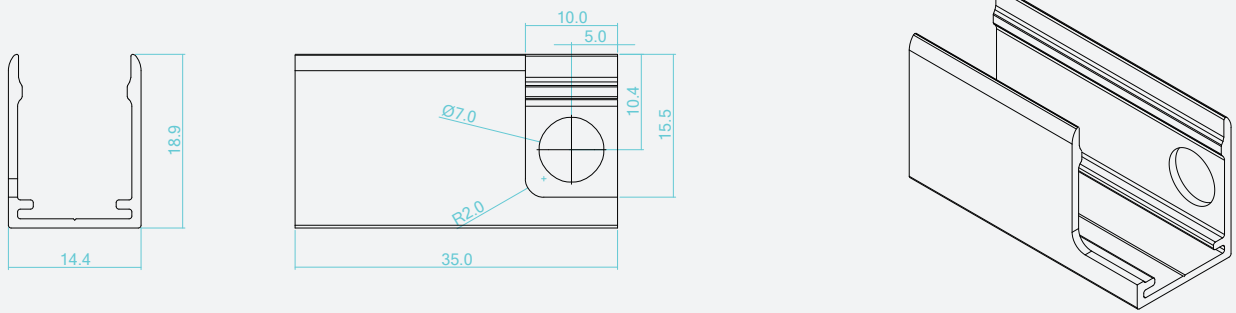

AS-NMS1217M1-500

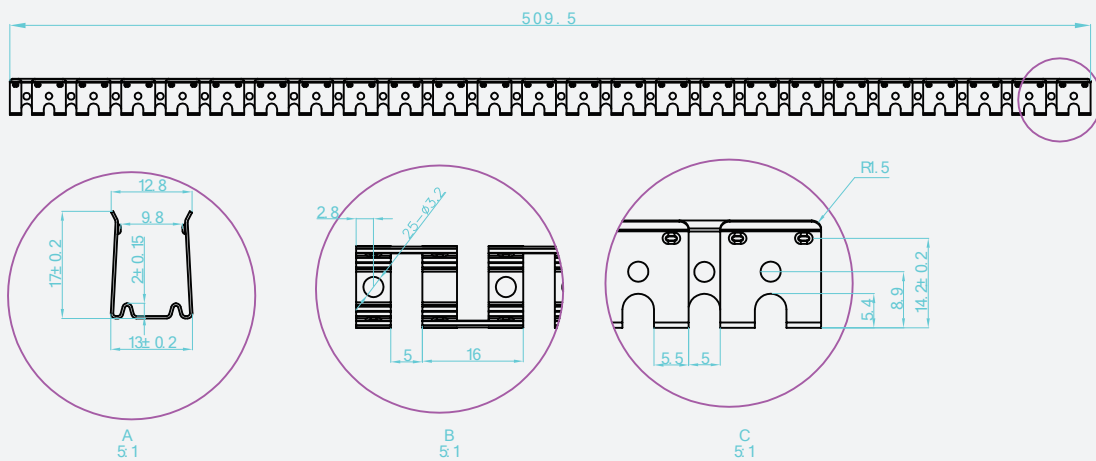

【Specification information】

Describe	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Range of applications
Recessed installation aluminum groove		AS-AFS1217A5-1000	12	0.21	2.52	4	1180*125*115	suit to:AFS1217/AHS1217/ ANS1217/NMS1217/ACS1217
Moldable groove		AS-AFS1217A4-1000	20	0.14	2.8	3.9	1180*125*115	suit to:AFS1217/AHS1217/ ANS1217/NMS1217/ACS1217
Flat Mounting Side opening clip		AS-AFS1217A4-35	350	0.005	1.75	2.4	250*250*150	suit to:AFS1217/AHS1217/ ANS1217/NMS1217/ACS1217
Moldable carrier		AS-NMS1217M1-500	66 (33*2)	0.046	5.5	6.4	500*290*290	size: L509*W13.1*H11.9mm With screws Cannot be used upside down suit to:AFS1217/AHS1217/

【Precautions】

- Do not use any acid or alkaline adhesive to fix products(including not limited to glass cement,etc).
- Please use professional cutting tools when cutting.
- AS-NMS1217M1-500 Cannot be used upside down.