

Moldable accessory Specification

**AS-NM3D1010M-1000**

**AS-NM3D1010TM-1000**

**AS-NMS1010M-500**




## 【Features】


- **Material:** aluminum;
- **Operating environment:** indoor and outdoor;
- **Installation:** screw flat mounting;
- **Cross-sectional size:** AS-NM3D1010M-1000: W12mm\*H12.31mm  
AS-NM3D1010TM-1000: W12mm\*H9.6mm  
AS-NMS1010M-500: Wmm\*Hmm;
- **Warranty:** 6 years.

## 【Mechanical Parameter】


### AS-NM3D1010M-1000

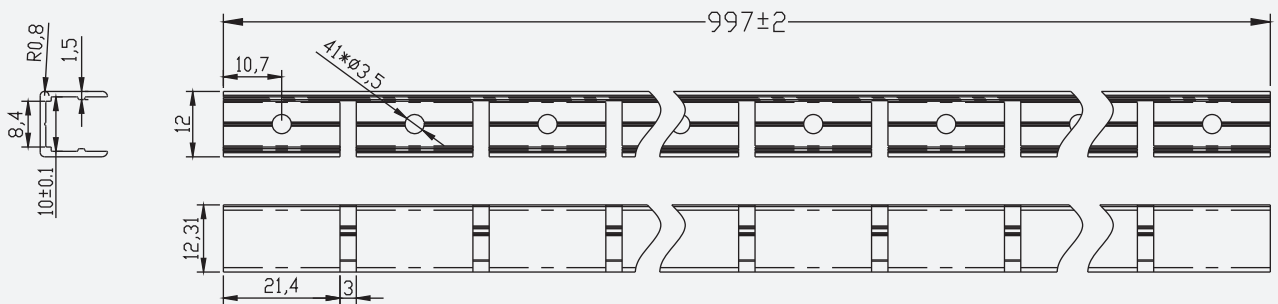


### AS-NM3D1010TM-1000

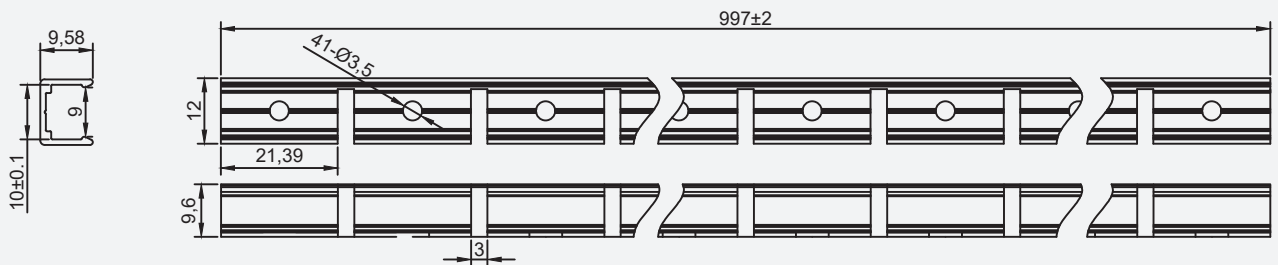

### AS-NMS1010M-500

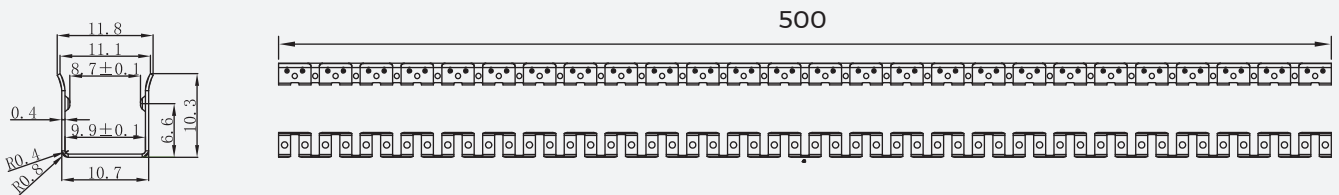

## 【Specification information】

Describe	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Bending direction	Range of applications
Moldable groove		AS-NM3D1010M-1000	60	0.1755	10.53	11.53	1180*125*115	Side	suit to:NMS1010/NM3D1010
Moldable groove		AS-NM3D1010TM-1000	300	0.0044	2.01	2.16	250*250*150	Side	suit to:NMS1010T/NM3D1010T
Moldable groove		AS-NMS1010M-500	66	0.046	4.55	6	500*500*290	3D	suit to:NMT1010/NMS1010/ NJT1010/NM3D1010

## 【Precautions】

- Do not use any acid or alkaline adhesive to fix products(including not limited to glass cement,etc).
- Please use professional cutting tools when cutting.
- AS-NMS1010M-500 cannot be installed with the lighted surface facing downward,if you need to install the lighted surface facing downward,we recommend using AS-NM3D1010M-1000/AS-NM3D1010TM-1000.