


























## PVC wire Specification






AS-WS-0001 AS-WS-0029  
AS-WS-0002 AS-WS-0030  
AS-WS-0003 AS-WS-0031  
AS-WS-0004 AS-WS-0032  
AS-WS-0005 AS-WS-0033  
AS-WS-0006 AS-WS-0034  
AS-WS-0007 AS-WS-0035  
AS-WS-0008 AS-WS-0036  
AS-WS-0009  
AS-WS-0010  
AS-WS-0011  
AS-WS-0012  
AS-WS-0013  
AS-WS-0014  
AS-WS-0015  
AS-WS-0016  
AS-WS-0017  
AS-WS-0018  
AS-WS-0019  
AS-WS-0020  
AS-WS-0025  
AS-WS-0026



## 【Features】


Picture	Model	Material	Termination Points	Wire Size	Outer Diameter	Wire Length	Appearance Color	IP
	AS-WS-0001	PVC	2PIN	20AWG(Red/Black)	φ4.5mm	500mm	White	IP20
	AS-WS-0002	PVC	2PIN	20AWG(Red/Black)	φ4.5mm	2000mm	White	IP20
	AS-WS-0003	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	500mm	White	IP20
	AS-WS-0004	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	2000mm	White	IP20
	AS-WS-0005	PVC	2PIN	20AWG(Red/Black)	φ4.0mm	500mm	White	IP20
	AS-WS-0006	PVC	2PIN	20AWG(Red/Black)	φ4.0mm	2000mm	White	IP20
	AS-WS-0007	PVC	2PIN	18AWG(Red/Black)	φ6.0mm	500mm	White	IP20
	AS-WS-0008	PVC	2PIN	18AWG(Red/Black)	φ6.0mm	2000mm	White	IP20
	AS-WS-0009	PVC	2PIN	20AWG	φ3.6mm	500mm	Gray	IP20
	AS-WS-0010	PVC	2PIN	20AWG	φ3.6mm	2000mm	Gray	IP20
	AS-WS-0011	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ6.0mm	500mm	White	IP20
	AS-WS-0012	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ6.0mm	2000mm	White	IP20
	AS-WS-0013	PVC	5PIN	22AWG(Red/Black/ Green/Blue/White)	φ4.5mm	500mm	White	IP20
	AS-WS-0014	PVC	5PIN	22AWG(Red/Black/ Green/Blue/White)	φ4.5mm	2000mm	White	IP20
	AS-WS-0015	PVC	3PIN	20AWG(Red/Black/Green)	φ4.5mm	500mm	White	IP20
	AS-WS-0016	PVC	3PIN	20AWG(Red/Black/Green)	φ4.5mm	2000mm	White	IP20
	AS-WS-0017	PVC	3PIN	22AWG(Red/Black/Green)	φ4.0mm	500mm	White	IP20
	AS-WS-0018	PVC	3PIN	22AWG(Red/Black/Green)	φ4.0mm	2000mm	White	IP20
	AS-WS-0019	PVC	2PIN	22AWG	φ3.6mm	500mm	Gray	IP20
	AS-WS-0020	PVC	2PIN	22AWG	φ3.6mm	2000mm	Gray	IP20
	AS-WS-0025	PVC	2PIN	24AWG	φ2.8mm	500mm	Gray	IP20
	AS-WS-0026	PVC	2PIN	24AWG	φ2.8mm	2000mm	Gray	IP20
	AS-WS-0029	PVC	2PIN	22AWG(Red/Black)	φ4.0mm	2000mm	White	IP20
	AS-WS-0030	PVC	2PIN	22AWG(Red/Black)	φ4.0mm	500mm	White	IP20
	AS-WS-0031	PVC	3PIN	18AWG(Red/Black) 20AWG(Green)	φ5.5mm	500mm	Black	IP20

## 【Features】


Picture	Model	Material	Termination Points	Wire Size	Outer Diameter	Wire Length	Appearance Color	IP
	AS-WS-0032	PVC	3PIN	18AWG(Red/Black) 20AWG(Green)	φ5.5mm	500mm	Black	IP20
	AS-WS-0033	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	500mm	Black	IP20
	AS-WS-0034	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	500mm	Black	IP20
	AS-WS-0035	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	2000mm	Black	IP20
	AS-WS-0036	PVC	4PIN	20AWG (Red/Black/Green/Blue)	φ4.5mm	2000mm	Black	IP20

## 【Mechanical Parameter】


AS-WS-0001  
AS-WS-0002

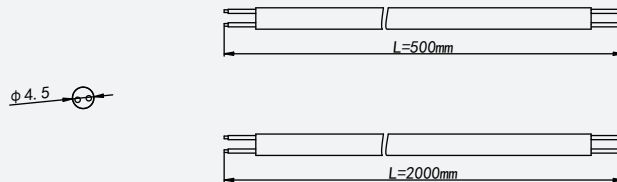

AS-WS-0003  
AS-WS-0004

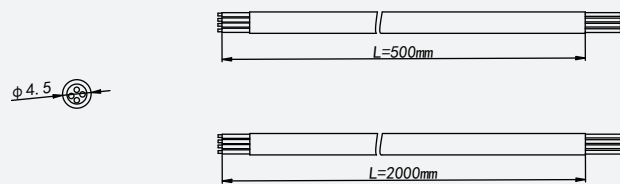



AS-WS-0005  
AS-WS-0006

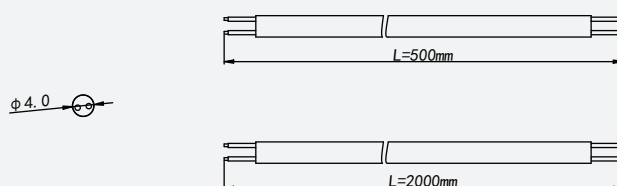




## [Mechanical Parameter]

AS-WS-0007  
AS-WS-0008

$\phi 4.0$





AS-WS-0009  
AS-WS-0010





AS-WS-0011  
AS-WS-0012

$\phi 6.0$




AS-WS-0013  
AS-WS-0014

$\phi 4.5$




# [Mechanical Parameter]


AS-WS-0015  
AS-WS-0016

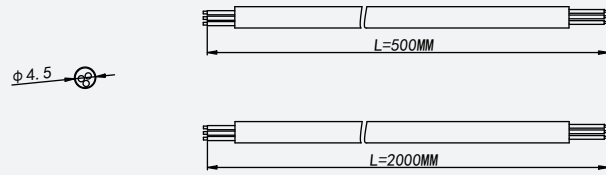


AS-WS-0017  
AS-WS-0018

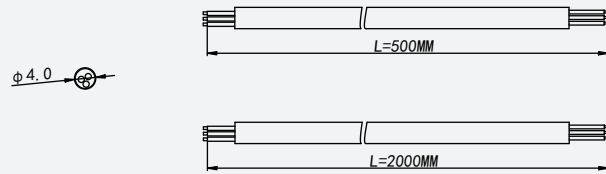

AS-WS-0019  
AS-WS-0020

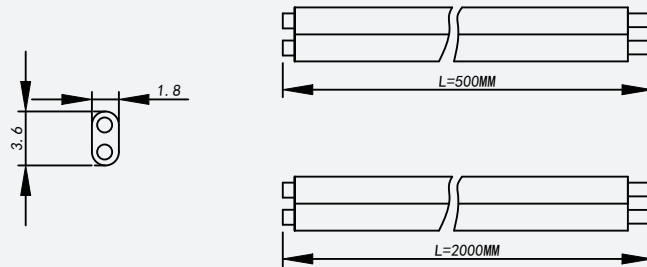


AS-WS-0025  
AS-WS-0026

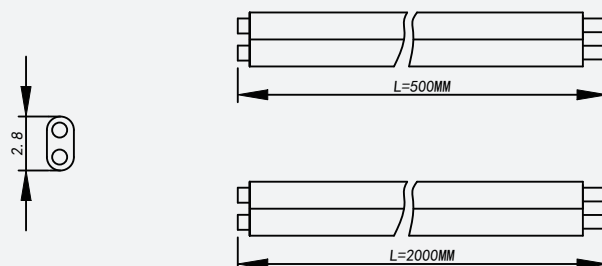


## [Mechanical Parameter]


AS-WS-0030  
AS-WS-0029

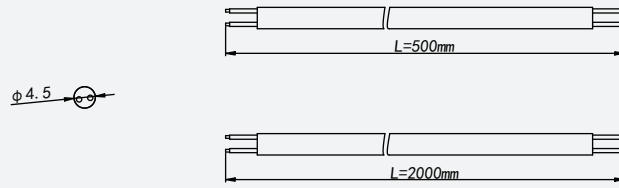


AS-WS-0031  
AS-WS-0032

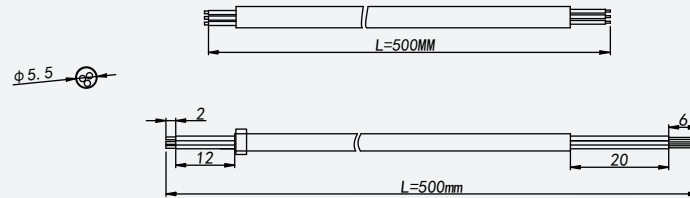



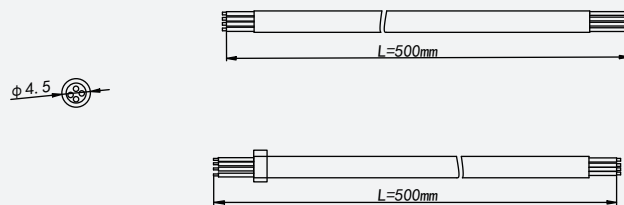



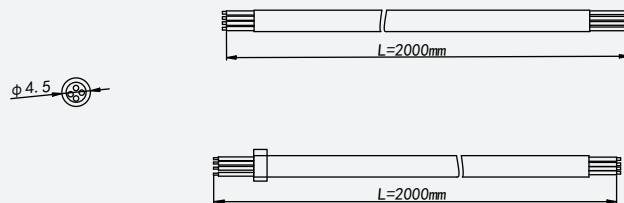



AS-WS-0033  
AS-WS-0034













AS-WS-0035  
AS-WS-0036



## [Specification Information]











Description	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Compatible products
2P PVC wire (0.5m)		AS-WS-0001	150	0.0154	2.31	2.61	250*250*150	Suitable for NJT1010(T)\NMS1010(T)\NMT1010(T)\NM3D1010(T)\AF(H)T1615\AF(H)S1217\AF(H)T1312\AF(H)T1312U\nMT1515\NM3D1515\((NEW)\NM3D1515(T)\NMT2015\NNR18\NNR25\NNR30\NNR40 monochromatic models with gluing end cap
2P PVC wire (2m)		AS-WS-0002	125	0.0616	7.7	8	250*250*150	Suitable for NJT1010(T)\NMS1010(T)\NMT1010(T)\NM3D1010(T)\AF(H)T1615\AF(H)S1217\AF(H)T1312\AF(H)T1312U\nMT1515\NM3D1515\((NEW)\NM3D1515(T)\NMT2015\NNR18\NNR25\NNR30\NNR40 monochromatic models with gluing end cap
4P PVC wire (0.5m)		AS-WS-0003	150	0.0194	2.91	3.21	250*250*150	Suitable for AF(H)S1217\AF(H)T1312\AF(H)T1615\NMT1515\NNR18\NNR25\NNR30\NNR40 RGB models with gluing end cap
4P PVC wire (2m)		AS-WS-0004	125	0.0776	9.7	10	250*250*150	Suitable for AF(H)S1217\AF(H)T1312\AF(H)T1615\NMT1515\NNR18\NNR25\NNR30\NNR40 RGB models with gluing end cap
2P PVC wire (0.5m)		AS-WS-0005	150	0.0128	1.92	2.22	250*250*150	Suitable for NMS0410\NJS0612(T)\NMS0612 monochromatic models with gluing end cap
2P PVC wire (2m)		AS-WS-0006	125	0.0512	6.4	6.7	250*250*150	Suitable for NMS0410\NJS0612(T)\NMS0612 monochromatic models with gluing end cap
2P PVC wire (0.5m)		AS-WS-0007	150	0.0192	2.88	3.18	250*250*150	Suitable for NNT1615 monochromatic models with gluing end cap
2P PVC wire (2m)		AS-WS-0008	125	0.0768	9.6	9.9	250*250*150	Suitable for NNT1615 monochromatic models with gluing end cap
2P Gray wire (0.5m)		AS-WS-0009	200	0.0077	1.54	1.84	250*250*150	Suitable for NNT1005 monochromatic models with gluing end cap, NMS0410 monochromatic models with metal end cap
2P Gray wire (2m)		AS-WS-0010	100	0.031	3.1	3.4	250*250*150	Suitable for NNT1005 monochromatic models with gluing end cap, NMS0410 monochromatic models with metal end cap

## [Specification Information]

Description	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Compatible products
4P PVC wire (0.5m)		AS-WS-0011	150	0.0258	3.88	4.18	250*250*150	Suitable for NNT1615 RGB models with gluing end cap
4P PVC wire (2m)		AS-WS-0012	125	0.1035	12.9	13.2	250*250*150	Suitable for NNT1615 RGB models with gluing end cap
5P PVC wire (0.5m)		AS-WS-0013	150	0.0195	2.925	3.364	250*250*150	Suitable for RGBW strip
5P PVC wire (2m)		AS-WS-0014	125	0.0755	9.4375	10.86	250*250*150	Suitable for RGBW strip
3P PVC wire (0.5m)		AS-WS-0015	150	0.0154	2.31	2.61	250*250*150	Suitable for NMS1217\NMT1312 \NMT1515\NMR18\NMR25\NMR30 CCT models with gluing end cap
3P PVC wire (2m)		AS-WS-0016	125	0.0616	7.7	8	250*250*150	Suitable for NMS1217\NMT1312 \NMT1515\NMR18\NMR25\NMR30 CCT models with gluing end cap
3P PVC wire (0.5m)		AS-WS-0017	150	0.0154	2.31	2.61	250*250*150	Suitable for NMS0410 CCT models with gluing end cap
3P PVC wire (2m)		AS-WS-0018	125	0.0616	7.7	8	250*250*150	Suitable for NMS0410 CCT models with gluing end cap
2P Gray wire (0.5m)		AS-WS-0019	200	0.006	1.2	1.5	250*250*150	Suitable for NMT0606 monochromatic models with gluing end cap
2P Gray wire (2m)		AS-WS-0020	100	0.024	2.4	2.7	250*250*150	Suitable for NMT0606 monochromatic models with gluing end cap



## [Specification Information]

Description	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Compatible products
2P Gray wire (0.5m)		AS-WS-0025	200	0.0077	1.54	1.84	250*250*150	Suitable for NMT0306\NMT0306T Monochromatic LED strip
2P Gray wire (2m)		AS-WS-0026	100	0.031	3.1	3.4	250*250*150	Suitable for NMT0306\NMT0306T Monochromatic LED strip
2P PVC wire (2m)		AS-WS-0029	50	0.0512	2.56	2.86	250*250*150	Suitable for NNR13\NNR13S Monochromatic LED strip
2P PVC wire (0.5m)		AS-WS-0030	150	0.0128	1.92	2.22	250*250*150	Suitable for NNR13\NNR13S Monochromatic LED strip
3P PVC wire (0.5m)		AS-WS-0031	150	0.0154	2.31	2.61	250*250*150	Suitable for NNR25BLK RGBX models with top outlet gluing end cap
3P PVC wire (0.5m with anti-pulling block)		AS-WS-0032	150	0.0158	2.37	2.67	250*250*150	Suitable for NNR25BLK RGBX models with side outlet gluing end cap
4P PVC wire (0.5m)		AS-WS-0033	150	0.0194	2.91	3.21	250*250*150	Suitable for NNR25BLK RGB models with top outlet gluing end cap
4P PVC wire (0.5m with anti-pulling block)		AS-WS-0034	150	0.0198	2.97	3.27	250*250*150	Suitable for NNR25BLK RGB models with side outlet gluing end cap
4P PVC wire (2m)		AS-WS-0035	125	0.0776	9.7	10	250*250*150	Suitable for NNR25BLK RGB models with top outlet gluing end cap
4P PVC wire (2m with anti-pulling block)		AS-WS-0036	125	0.078	9.75	10.05	250*250*150	Suitable for NNR25BLK RGB models with side outlet gluing end cap

## **【Precautions】**

- PVC wires need to be used with glue plugs.
- Soldering wires and gluing caps must be in a dry environment.
- Allow to stand for at least 1 hour after gluing, protection class IP65.

