

Track System Specification


HI-30

— TLS-H series



【Basic Parameters】

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Beam angle: 24°/36° optional
- IP grade: IP20
- CCT: 2700/3000/4000K optional
- CRI: 90
- SDCM(Light source): <3 Step (ANSI)
- Input voltage: AC220-240V
- Working temperature: -15℃~35℃
- Lighting direction: Downward
- Dimming method: Non-dimming
(Suitable for four-wire three-circuit guide rail)
/DALI dimming(Suitable for six-wire three-circuit guide rail)
optional
- Application: Indoor
- Certification: CE, ROHS, Reach
- Warranty: 5 years

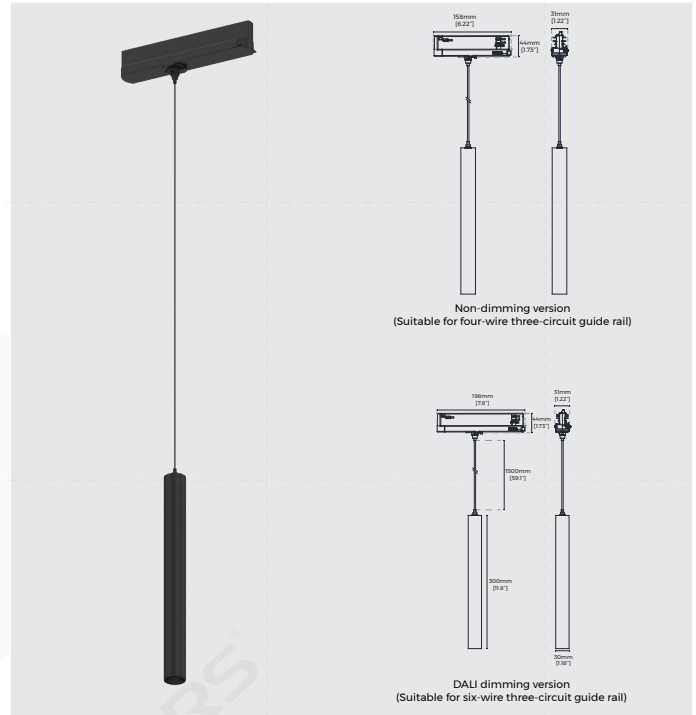

【Luminaire Parameters】

Version	Model	Length	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	HI-30	φ30*300mm	220-240 VAC	/	7	7.5	>90	24°	2700K	300
									3000K	315
									4000K	340
								36°	2700K	335
									3000K	355
									4000K	385

Note:

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

【Packing】

Model	Size (mm/box)	Quantity /box	Quantity /carton	NW (kg/box)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
TLS-HIF30-A930B6	385*220*55 [15.2"*8.7"*2.2"]	1	10	0.52	5.2	6	450*395*300 [17.7"*15.6"*11.8"]

【Attentions】

1. Non-professionals are prohibited from installing, disassembling and repairing the product.
2. Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
3. Please use professional cutting tools when cutting
4. Do not use any acid or alkaline adhesive to fix products
5. The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.