

Track System Specification


# HNK-25

— TLS-H series



## 【Basic Parameters】

- Material: Silicone Neon
- Coating: Black (RAL9005)
- Length: 1000/2500mm optional
- IP grade: IP20
- CCT: 2700/3000/4000K optional
- CRI: 90
- SDCM(Light source): <3 Step (ANSI)
- Input voltage: AC220-240V
- Working temperature: -15℃ -35℃
- Lighting direction: 360°
- Dimming method: Non-dimming  
(Suitable for four-wire three-circuit guide rail)  
/DALI dimming(Suitable for six-wire three-circuit guide rail)  
optional
- Application: Indoor
- Certification: CE, ROHS, Reach
- Warranty: 5 years

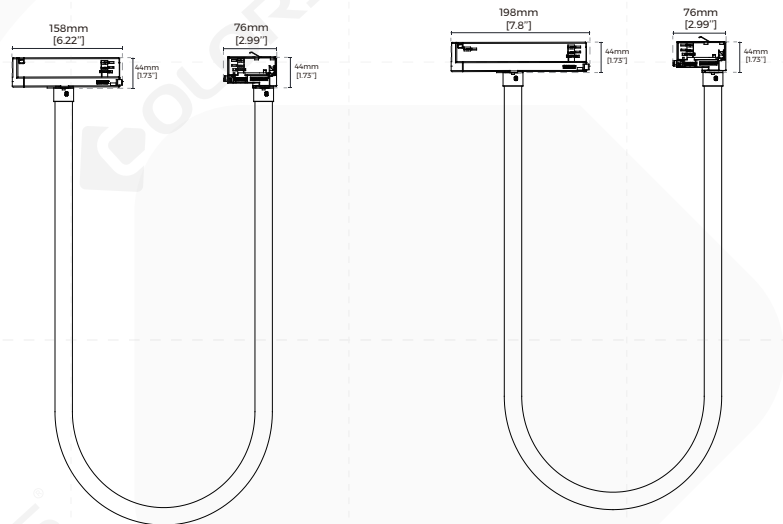

Non-dimming version  
(Suitable for four-wire three-circuit guide rail)

DALI dimming version  
(Suitable for six-wire three-circuit guide rail)

## 【Luminaire Parameters】

Version	Model	Length	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	Beam Angle	CCT	Lumen (LM)
Normal	HNK-25	φ25*1000mm	220-240 VAC	/	12	14	>90	360°	2700K	1125
									3000K	1185
									4000K	1275
		φ25*2500mm			2700K	2752				
					3000K	2912				
					4000K	3136				

Note:

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

## 【Packing】

Model	Size (mm/box)	Quantity /box	Quantity /carton	NW (kg/box)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
TLS-HNK251000-N930B12	/	1	4	1	4	4.4	410*410*260 [16.14"*16.14"*10.2"]
TLS-HNK252500-N930B28	/	1	2	2.2	4.4	5	410*410*260 [16.14"*16.14"*10.2"]

## 【Attentions】

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting
- 4、 Do not use any acid or alkaline adhesive to fix products
- 5、 The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.