

Infinite System Specification


— Net Shape




ME3535D-NY
ME5035D-NY
ME7035D-NY
ME3535P-NY
ME5035P-NY
ME7035P-NY




Optical: Diffuser

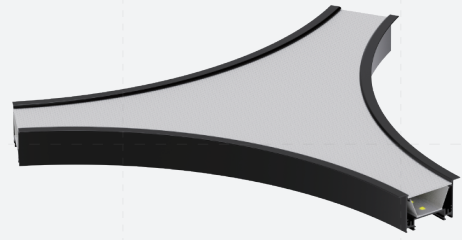


Optical: Prismatic



Model:
ME3535D-NY
ME3535P-NY



Model:
ME5035D-NY
ME5035P-NY



Model:
ME7035D-NY
ME7035P-NY

© Basic Information

Light efficiency

ME3535D-NY 100LM/W(Regular), 120LM/W(High-Efficiency)	ME3535P-NY 85LM/W(Regular), 105LM/W(High-Efficiency)
ME5035D-NY 100LM/W(Regular), 120LM/W(High-Efficiency)	ME5035P-NY 90LM/W(Regular), 105LM/W(High-Efficiency)
ME7035D-NY 110LM/W(Regular), 135LM/W(High-Efficiency)	ME7035P-NY 100LM/W(Regular), 120LM/W(High-Efficiency)


Diameter

ME3535D-NY/ME3535P-NY/ME5035D-NY/ME5035P-NY D450/600/800 mm	ME7035D-NY/ME7035P-NY D600/800 mm
---	---


Common information

· Material:	AL6063-T5, spraying surface
· Color:	Black/White/Silver/Orange/Blue/Green /Rose gold/Champagne gold
· Angle:	60°
· IP grade:	IP20
· CCT:	2700/3000/3500/4000/5000/6500K optional
· CRI:	>80/>90
· SDCM:	≤3 Step
· Dimming method:	Non-dimming, 1-10V, DALI2+PUSH
· Application:	Indoor
· Installation:	Recessed
· Certification:	CE, UKCA, ROHS, REACH, CB, ENEC, ETL, LM-80
· Warranty:	5 years


© Product Dimension Information




*Suitable for curve modules: D450




*Suitable for curve modules: D600

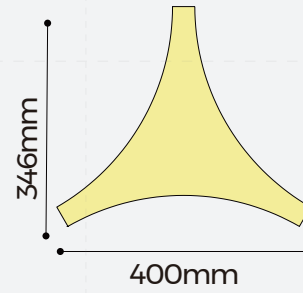


*Suitable for curve modules: D800




*Suitable for curve modules: D450




*Suitable for curve modules: D600



*Suitable for curve modules: D800

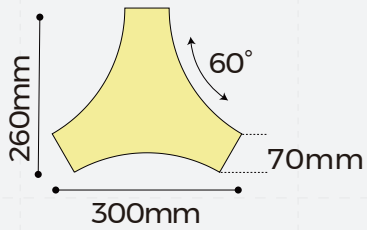

*Suitable for curve modules: D600



*Suitable for curve modules: D800

*The yellow fill means luminous surface.

© Luminaire Parameters

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
ME3535D-NY	Regular	D450 [1.48ft]	60°	10	DC36V	0.25	>80	988	2700K 3000K 3500K 4000K 5000K 6500K
							>90	850	
		D600 [1.97ft]	60°	18	DC36V	0.45	>80	1779	
							>90	1530	
		D800 [2.62ft]	60°	26	DC36V	0.65	>80	2570	
							>90	2210	
	High-Efficiency	D450 [1.48ft]	60°	10	DC36V	0.25	>80	1186	
							>90	1020	
		D600 [1.97ft]	60°	18	DC36V	0.45	>80	2135	
							>90	1836	
		D800 [2.62ft]	60°	26	DC36V	0.65	>80	3084	
							>90	2652	
ME3535P-NY	Regular	D450 [1.48ft]	60°	10	DC36V	0.25	>80	840	
							>90	723	
		D600 [1.97ft]	60°	18	DC36V	0.45	>80	1512	
							>90	1301	
		D800 [2.62ft]	60°	26	DC36V	0.65	>80	2184	
							>90	1879	
	High-Efficiency	D450 [1.48ft]	60°	10	DC36V	0.25	>80	1038	
							>90	893	
		D600 [1.97ft]	60°	18	DC36V	0.45	>80	1868	
							>90	1607	
		D800 [2.62ft]	60°	26	DC36V	0.65	>80	2698	
							>90	2321	

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
ME5035D-NY	Regular	D450 [1.48ft]	60°	14	DC36V	0.35	>80	1384	2700K 3000K 3500K 4000K 5000K 6500K
							>90	1190	
		D600 [1.97ft]	60°	22	DC36V	0.55	>80	2174	
							>90	1870	
		D800 [2.62ft]	60°	40	DC36V	1	>80	3953	
							>90	3400	
	High-Efficiency	D450 [1.48ft]	60°	14	DC36V	0.35	>80	1660	
							>90	1428	
		D600 [1.97ft]	60°	22	DC36V	0.55	>80	2609	
							>90	2244	
		D800 [2.62ft]	60°	40	DC36V	1	>80	4744	
							>90	4080	
ME5035P-NY	Regular	D450 [1.48ft]	60°	14	DC36V	0.35	>80	1245	
							>90	1071	
		D600 [1.97ft]	60°	22	DC36V	0.55	>80	1957	
							>90	1683	
		D800 [2.62ft]	60°	40	DC36V	1	>80	3558	
							>90	3060	
	High-Efficiency	D450 [1.48ft]	60°	14	DC36V	0.35	>80	1453	
							>90	1250	
		D600 [1.97ft]	60°	22	DC36V	0.55	>80	2283	
							>90	1964	
		D800 [2.62ft]	60°	40	DC36V	1	>80	4151	
							>90	3570	

Model	Version	Diameter (mm)	Angle (°)	Type Power (W/PCS)	Input Voltage (V)	Input Current (A)	CRI	Lumens (LM/PCS)	CCT
ME7035D-NY	Regular	D600 [1.97ft]	60°	20	DC36V	0.5	>80	2174	2700K 3000K 3500K 4000K 5000K 6500K
							>90	1870	
		D800 [2.62ft]	60°	30	DC36V	0.75	>80	3262	
							>90	2805	
	High-Efficiency	D600 [1.97ft]	60°	20	DC36V	0.5	>80	2669	
							>90	2295	
		D800 [2.62ft]	60°	30	DC36V	0.75	>80	4003	
							>90	3443	
ME7035P-NY	Regular	D600 [1.97ft]	60°	20	DC36V	0.5	>80	1977	
							>90	1700	
		D800 [2.62ft]	60°	30	DC36V	0.75	>80	2965	
							>90	2550	
	High-Efficiency	D600 [1.97ft]	60°	20	DC36V	0.5	>80	2372	
							>90	2040	
		D800 [2.62ft]	60°	30	DC36V	0.75	>80	3558	
							>90	3060	

Note:

1. The output data is based on white coated luminaire with Ra80,4000K.
2. The above Lumens data are at 4000K color temperature.
3. High-efficiency version does not do 3500K and 5000K.
4. The tolerance of output data can be vary up to 15%.
5. The type power is with the power supply, the input current is the current of the light source.
6. The output data is typical value.
7. The following is an example of lumen conversion instructions:

CCT	RA	Ratio of lumens (white coated luminaire)	Ratio of lumens (Other coated colors of luminaire)
2700K	80	90%	Calculate white coated luminaire lumens first, then multiply by 90 %
	90	77%	
3000K	80	93%	
	90	80%	
3500K	80	97%	
	90	83%	
4000K	80	100%	
	90	86%	
5000K	80	100%	
	90	86%	
6500K	80	100%	
	90	86%	


Note: All other lumens are to be based on white coated luminaire with 4000K,RA80(100%);and multiplied by the percentage in the table above.

Assuming a 4000K, RA80 white coated luminaire with 1000lm lumens:


Example 1: If you need 4000K,RA90 lumens (white coated luminaire)	1000*86%=860lm
Example 2: If you need 4000K,RA90 lumens (other coated colors of luminaire)	1000*86%*90%=774lm
Example 3: If you need 3000K,RA80 lumens (white coated luminaire)	1000*93%=930lm
Example 4: If you need 3000K,RA90 lumens (white coated luminaire)	1000*80%=800lm
Example 5: If you need 5000K,RA80 lumens (white coated luminaire)	1000*100%=1000lm

© Optical Parameter

【ME3535D-NY】

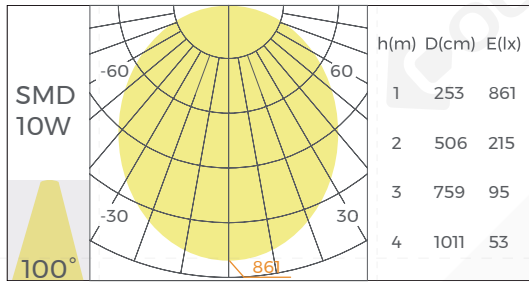


Regular version

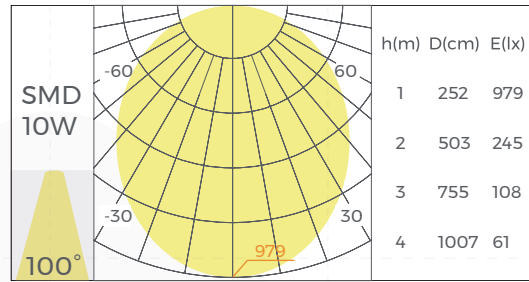


High-efficiency version

*The above data is based on a D450mm diameter module with Ra80,4000K.

【ME3535P-NY】

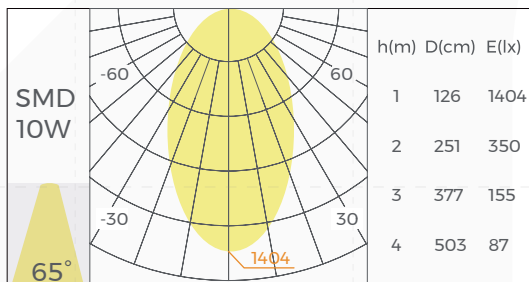


Regular version

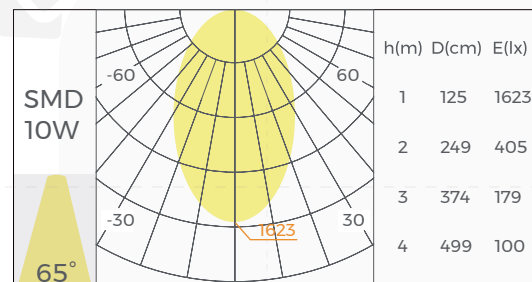


High-efficiency version

*The above data is based on a D450mm diameter module with Ra80,4000K.

【ME5035D-NY】

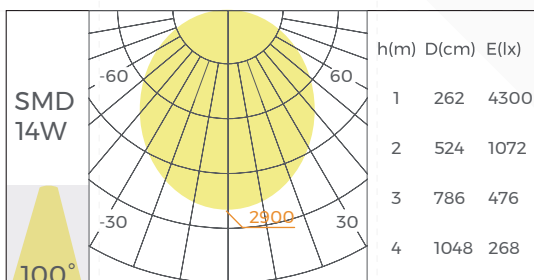


Regular version

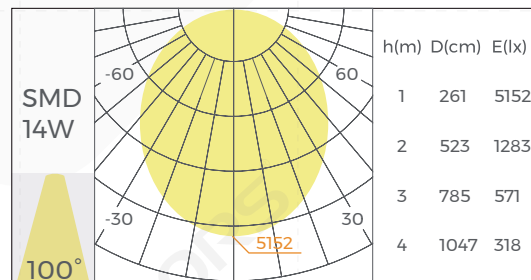


High-efficiency version

*The above data is based on a D450mm diameter module with Ra80,4000K.

【ME5035P-NY】

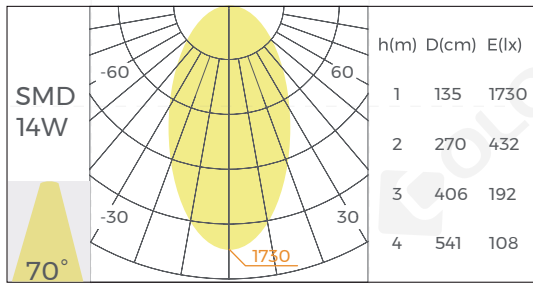


Regular version

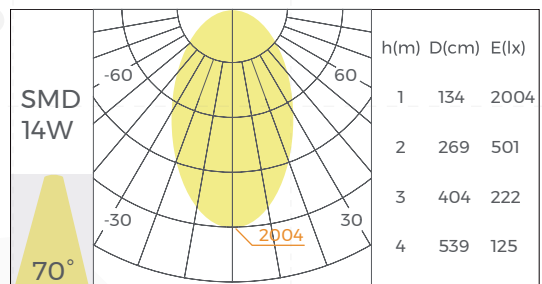


High-efficiency version

*The above data is based on a D450mm diameter module with Ra80,4000K.

【ME7035D-NY】

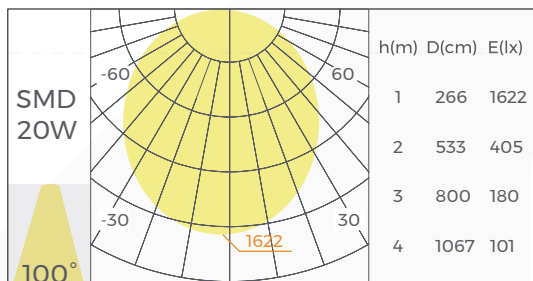


Regular version

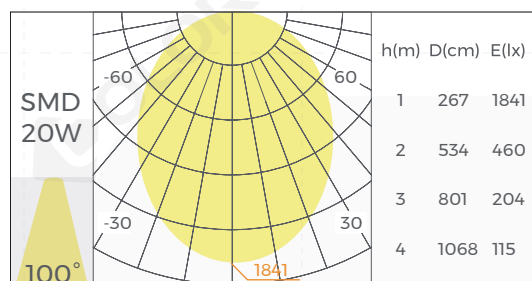


High-efficiency version

*The above data is based on a D600mm diameter module with Ra80,4000K.

【ME7035P-NY】

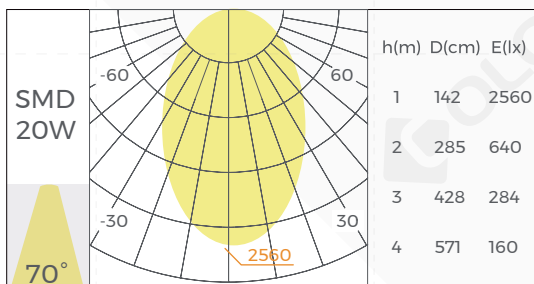

Regular version

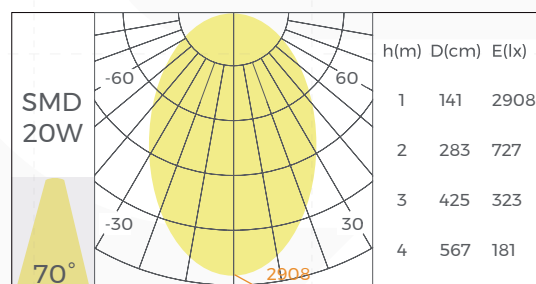

High-efficiency version


















*The above data is based on a D600mm diameter module with Ra80,4000K.

Note:






1. The above optical parameters refer to the Line series; only the light-emitting angle can be used as a reference.
2. For specific luminous effects, please use the report input DIALux software in the test report.

Common Accessories

Power supply

Picture	Dimming Method	Model	Input Voltage	Output Voltage	Output Current	Size(mm)	Certification
	NO/OFF	LF-GMR020YS0350H(S)	AC220 ~240V 50/60Hz	20-56V	0.2-0.35A	168*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GMR040YS0700H(S)		20-56V	0.35-0.7A	210*30*21	
		LF-GMR040YS1050H(S)		20-38V	0.7-1.05A	210*30*21	
		LF-GMR060YS1550H(S)		20-39V	1.2-1.55A	280*30*21	
		LF-GMR060YS II		33-42V	1.15A	245*30*21	
		LF-GMR080YS II		33-42V	1.6/1.7/1.8 /1.9/2A	245*30*21	
	0-10V	LF-GLD025YE	AC220 ~240V 50/60Hz	25-42V	0.3/0.35/0.4 /0.45/0.5/0.55A	245*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GLD035YE		25-42V	0.6/0.65/0.7 /0.75/0.8A	245*30*21	
		LF-GLD045YE		25-42V	0.85/0.9/1 /1.05A	245*30*21	
		LF-GLD055YE		25-42V	1.1/1.15/1.2 /1.3A	285*30*21	
		LF-GLD065YE		25-42V	1.35/1.4/1.5 /1.55A	285*30*21	
		LF-GLD080YE		25-40V	1.6/1.7/1.8/1.9/2A	355*30*21	
		LF-GSD020YE		25-42V	0.25-0.5A (50mA)	245*30*21	
		LF-GSD030YE		25-42V	0.55-0.75A (50mA)	245*30*21	
	DALI	LF-GSD040YE	AC220 ~240V 50/60Hz	25-42V	0.8-1.05A (50mA)	245*30*21	CCC/ENEC/CE/ RCM/UKCA
		LF-GSD060YE		25-42V	1.1-1.5A (50mA)	285*30*21	
		LF-GSD080YE		25-42V	1.55-2.0A (50mA)	355*30*21	

Installation accessories

Picture	Name	Model	Description
	Recessed	RB-04	Suitable for ME3535/ME5035/ME7035 recessed accessory 4 pcs/set
	Input line	CM-24	Wire Size: D3*2000mm Maximum current capacity: 4A Maximum weight capacity: 8Kg Suitable for MS3570/MS5070/MS7070/MS3535/MS5035/ MS7035 ceiling and ME3535/ME5035/ME7035 recessed input line
	End Caps	EC-ME3535	Material:AL6063-T5 Size:L50*W35*H2.5mm
	End Caps	EC-ME5035	Material:AL6063-T5 Size:L65*W35*H2.5mm
	End Caps	EC-ME7035	Material:AL6063-T5 Size:L85*W35*H2.5mm

Note:


1. The modules are manufactured with splicing accessories and terminals.
2. All standard modules can only use the power supply external solution, the above installation accessories for power supply external.

Non-Directional Terminal Design


Non-directional terminal design that simplifies and enhances the efficiency of electrical connections between modules.

② Select Power Supply

Drive
Output: 2A & 1.5A




③ Power Taking & Wiring Diagram



MAX CURRENT: 2A

The total current of the design should be consistent with the output current of the power supply

AC 220V

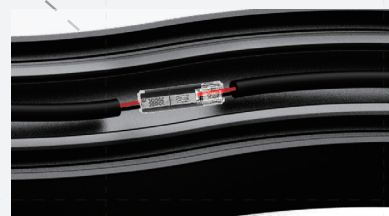

Non-directional

Note:

1. The above electrical connection modeling is a 35mm luminaire height demonstration only to show the non-directional terminal design.
2. The above graphic explains how to select the right power supply by calculating the current













◎Packing

Model	Quantity (PCS/inner box)	Quantity (PCS/carton)	NW (kg/carton)	GW (kg/carton)	Size (mm/carton)
ME3535DDO450NY60(R) -X84OW010	1	6	3.78	7.62	720*550*180 [28.34"*21.65"*7.08"]
ME3535DDO600NY60(R) -X84OW018	1	6	5.10	9.36	620*380*260 [24.40"*14.96"*10.23"]
ME3535DDO800NY60(R) -X84OW026	-	6	7.32	11.40	820*480*260 [32.28"*18.89"*10.23"]
ME5035DDO450NY60(R) -X84OW014	1	6	4.50	8.40	720*550*180 [28.34"*21.65"*7.08"]
ME5035DDO600NY60(R) -X84OW022	1	6	5.94	10.38	620*380*260 [24.40"*14.96"*10.23"]
ME5035DDO800NY60(R) -X84OW040	-	6	8.46	13.50	820*480*260 [32.28"*18.89"*10.23"]
ME7035DDO600NY60(R) -X84OW020	1	6	7.32	11.22	620*380*260 [24.40"*14.96"*10.23"]
ME7035DDO800NY60(R) -X84OW030	-	6	9.84	14.76	820*480*260 [32.28"*18.89"*10.23"]

Note:

1. The above weight data is for reference, the exact data should be based on the weight of the physical weighing shall prevail.

◎Model Code

M	E	3535	D	D0600	NY60	(R)	-	X	8	40	B	-	018
 Type M: Module	 Installation E: Recessed S: Ceiling/Pendant	 Size 3535: Surface width of module 35mm: Height of module	 Optical Type D: Diffuser P: Prismatic	 Diameter D0600: 600mm	 Corner Angle NY60NY shape: 60°	 Version (R): Regular (H): High-efficiency	 Dimming Method X: No power N: Non-dimming D: 1-10V A: DALI	 CRI 8: Ra>80 9: Ra>90	 CCT 27: 2700K 30: 3000K 40: 4000K	 Color B: Black W: White S: Silver	 Type power 018: 18W		

© **Attentions**

- 1、 Non-professionals are prohibited from installing, disassembling and repairing the product.
- 2、 Avoid scratching, distortion and irregular bending of the product during installation; otherwise it may cause irreparable damage to the product.
- 3、 Please use professional cutting tools when cutting
- 4、 Do not use any acid or alkaline adhesive to fix products
- 5、 The product is only suitable for indoor dry places, can not be used in outdoor, seaside or wet environment.
- 6、 PC features: Each 10°C rise or drop will make diffuser extend or shrink 0.8mm/m, please confirm before processing and use